

CC7V-T1A

Tuning Fork Crystal 32.768 kHz




100% leadfree, RoHS - compliant

Smallest SMT ceramic package
Package height 0.90 mm
SMD-package in Tape and Reel
Industrial and MIL temp. ranges
High stability
Low aging
Low power consumption
High shock and vibration resistance


ELECTRICAL CHARACTERISTICS AT 25°C:

DIMENSIONS

Package:

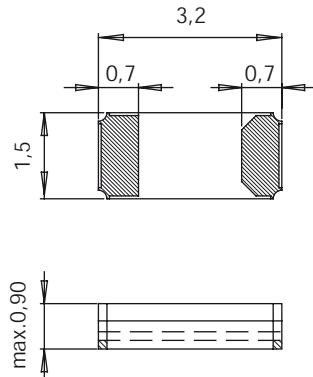

Recommended Solder Pad:



All dimensions in mm typical

The CC7V-T1A is a completely leadfree product.

DESCRIPTION:

This SMD ceramic package has been specially designed for miniature industrial and telecom applications. A special crystal manufacturing process is used to achieve improved electrical characteristics and a miniaturized blank size.

The crystals are supplied in special trays (200 crystals per tray). For pick-and-place equipment, the parts are available in 12 mm tape:
 7" (178 mm) reel with 3'000 crystals
 10" (254 mm) reel with 7'000 crystals
 13" (330 mm) reel with 14'000 crystals

Nominal Frequency ¹⁾	F _L	32.768	kHz
Load capacitance ²⁾	C _L	9.0 / 12.5	pF
Frequency tolerance ³⁾	ΔF/F	+/-30	ppm
	ΔF/F	+/-100	ppm
Series resistance typ./max.	R _S	50 / 70	kΩ
Motional capacitance typ.	C ₁	4.0	fF
Static capacitance typ.	C ₀	1.2	pF
Drive level max.	P	1.0	μW
Insulation resistance min.	R _i	500	MΩ
Aging first year max.	ΔF/F	+/-3	ppm
Turnover temperature	T ₀	25 +/-5	°C
Frequency vs. temperature	ΔF/F ₀	-0.035 ppm/°C ² (T - T ₀) ² +/-10%	ppm

1) Other frequencies on request.

2) Other load capacitances on request.

3) Tighter and wider frequency tolerances on request.

STANDARD FREQUENCIES:

Frequency kHz
32.768
Other frequencies on request


**ENVIRONMENTAL
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
Industrial operating temp. range		-40 to +85°C	
Military operating temp. range		-55 to +125°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	+/-5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	+/-5 ppm

**TERMINATIONS AND
PROCESSING:**

Type	Termination	Processing
CC7V-T1A	For SMD mounting Au flashed pads	Reflow soldering 260°C / 20 s max.

**PART NUMBER/
ORDERING INFORMATION
EXAMPLE:**

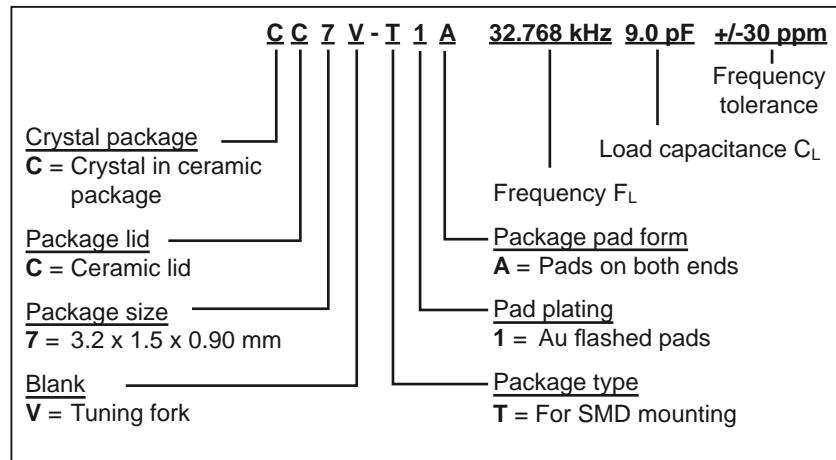

All specifications subject to change without notice. 10.06



Headquarters:

Micro Crystal
Div. of ETA SA
Mühlestrasse 14
CH-2540 Grenchen
Switzerland
Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.ch
www.microcrystal.ch

North American Sales Office:

Micro Crystal
A Div. of The Swatch Group (U.S.) Inc.
1615 Barclay Boulevard
Buffalo Grove, IL 60089
USA
Tel. +1 847 818 9825
Fax +1 847 818 9915
sales@microcrystal.com
www.microcrystal.com