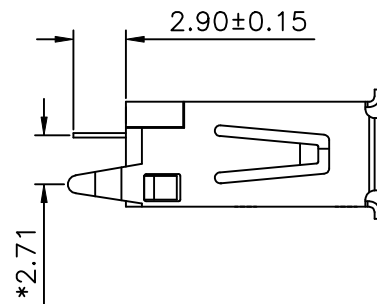
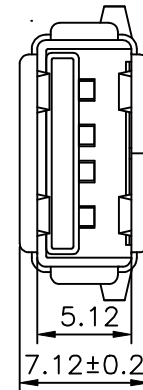
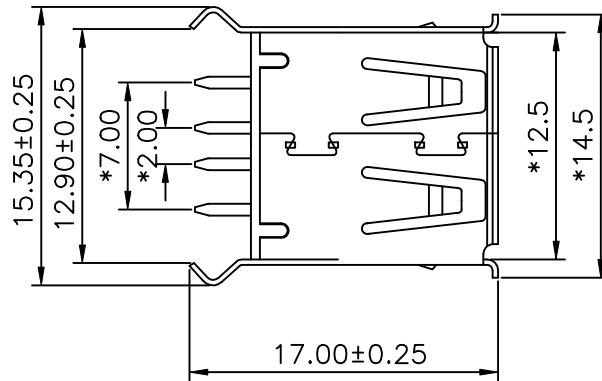


PC Board Layout
Component Side Shown

NOTES:

1.MATERIAL:

TERMINAL—COPPER ALLOY
SHIELD—COPPER ALLOY(t=0.30mm) PLATED NICKEL 50U”
HOUSING—PBT+ 30% G.F. UL94V-0/COLOR: WHITE

2.ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 500 VAC RMS 60Hz, 1MIN.

3.GAP. 0.25mm (Max.)

4.PART NUMBER: XUSB-A1D4F-ON4N

△ ROHS PART NUMBER: XUSBA1D4FON4N-L

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD NEW P/N	JamYin 10/11/05	

DETACHED LISTS	MM (INCH)		DFTO sammy	DATE 04/08/05	FULL RISE ELECTRONIC CO., LTD		
	TOLERANCES EXCEPT AS NOTED		CHKDSAMMY	DATE2005/10/12			
	MM		MFO	DATE	TITLE USB Series A, 4-Position 180°		
	.0 ±0.20 ±		APPVLLUSHENG	DATE2005/10/12			
	.00 ±0.15 ±		MATERIAL :		DRAWING NO. GE813031 /PART NO. SEE NOTE		
	.000 ±0.075 ±		QT'Y :				
	ANGLES ±		FINISH :		DO NOT SCALE DRAWING		
			SCALE : 1:1				
	THIRD ANGLE PROJECTION						