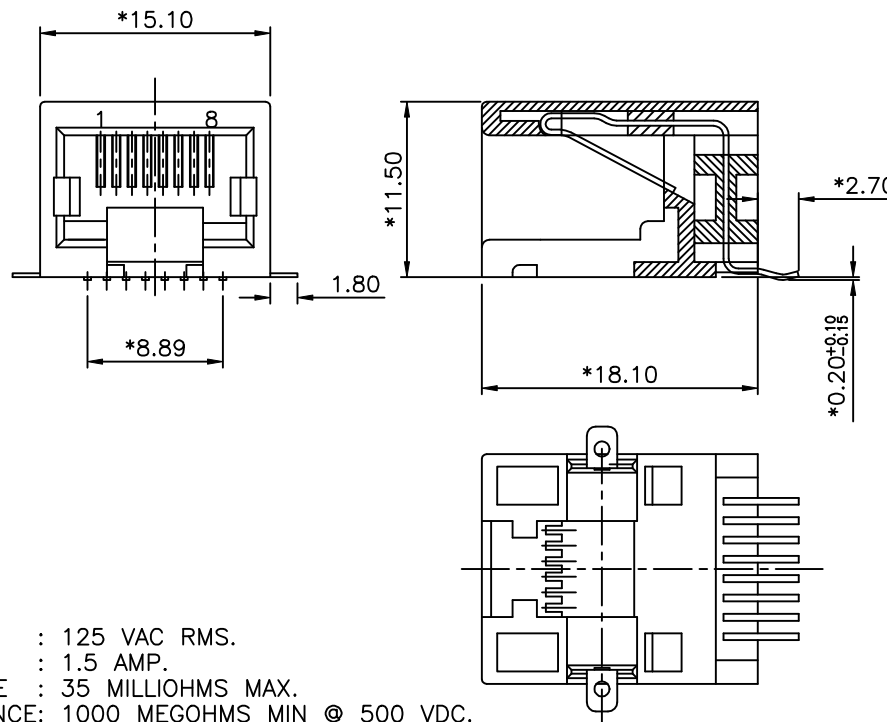


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : FR52
2. CONTACT MATERIAL : PHOSPHOR BRONZE $t=0.35\text{mm}$.
3. PLATING : 1: CONTACT AREA— SELECTIVE GOLD PLATING.
2: TAILS— PLATED TIN OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.
3. REFLOW SOLDERING TEMPERATURE: 255°C TO 265°C 5-10 SECOND.

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

PART NUMBER: E5388-EH05YX-L

1-3U" 2-6U"
3-15U" 4-30U"
5-50U"

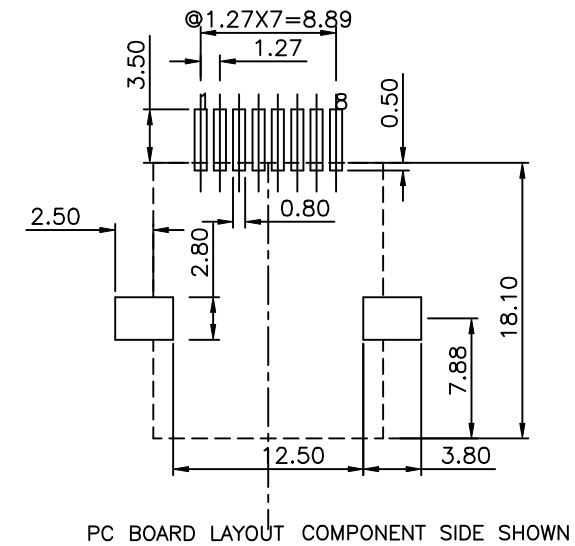

DETAILED LIST	MM (INCH)		DFTO SAMMY	DATE 04/16/05	FULL RISE ELECTRONIC CO., LTD		
	TOLERANCES EXCEPT AS NOTED		CHKDANKUE	DATE 2005/4/20			
			MFO	DATE	TITLE SIDE ENTRY 8P(SMT)		
			APPVLLUSHENG	DATE 2005/4/20			
	MM		MATERIAL :				
	.0 ±0.20						
	.00 ±0.15		DRAWING NO. GE533049-LA				
	.000 ±0.075						
	ANGLES ±		/PART NO. SEE NOTE				
							
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING					
SCALE : 3:1							
		SHEET X OF Y					