
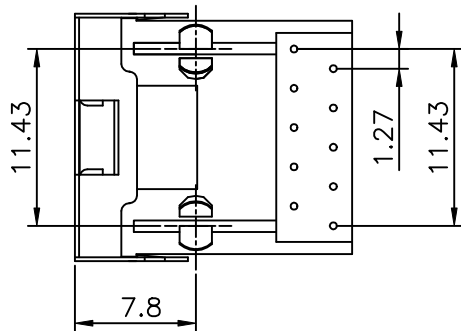
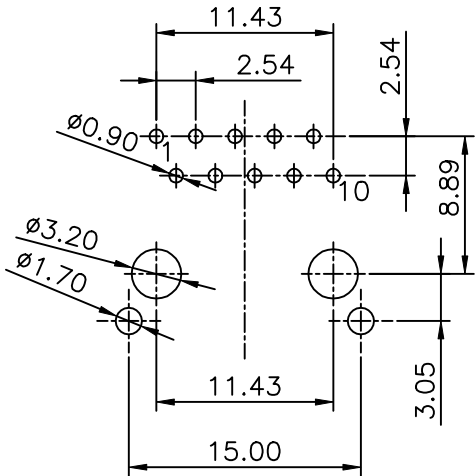
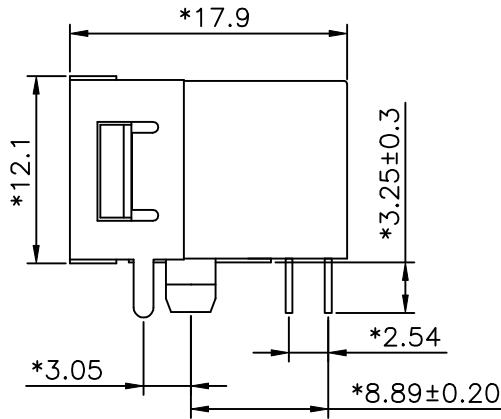


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD



NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : FR52 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
3. WAVE SOLDERING TEMPERATURE: 255~256° C(5~10SECONDS).


MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E560X-X303QX-L

- | | |
|--------------|-------------------------|
| 1-10 CONTACT | 1-3u" 2-6u" 3-15u" |
| 8-8 CONTACT | 4-30u" 5-50u" 6-Pd20u" |
| 6-6 CONTACT | 0-TIN W/ "FRE" LOGO |
| | 2-TIN W/O "FRE" LOGO |
| | 3-NICKEL W/O "FRE" LOGO |
| | 4-NICKEL W/ "FRE" LOGO |

DETACHED LISTS	MM (INCH)		DFTO ANKUE	DATE 9/06/05	FULL RISE ELECTRONIC CO., LTD					
	TOLERANCES EXCEPT AS NOTED		CHKD SAMMY	DATE2005/09/06						
			MFO	DATE	TITLE					
			APPV LUSHENG	DATE2005/09/06						
			MATERIAL :			11.5 SIDE ENTRY PCB JACK (10P)				
	ANGLES ± 0.5		QT'Y :			DRAWING NO. GE563A42-LA			SIZE	REV
			FINISH :			/PART NO. SEE NOTE			A3	O
THIRD ANGLE PROJECTION		SCALE : 3:1			DO NOT SCALE DRAWING			SHEET OF		