
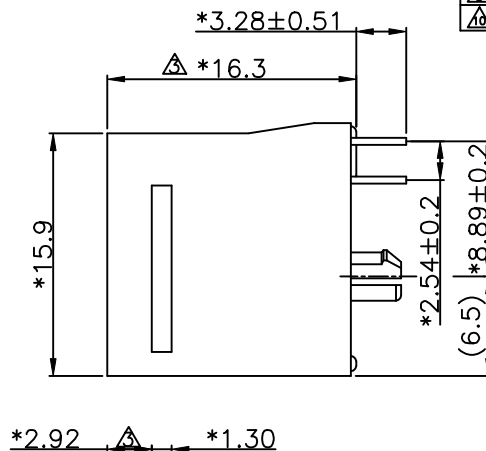


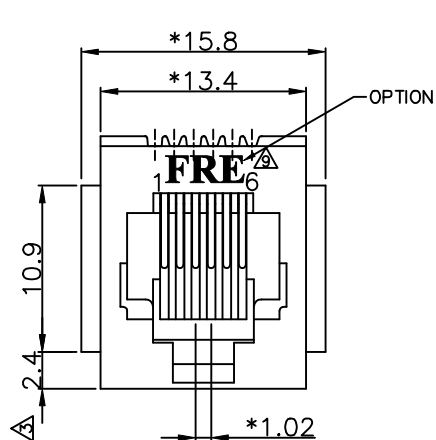

△	MODIFY DRAWING	Sammy	12/28/05
△	DEL ROHS P/N	ANKUE	3/28/06

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD PART NO	Sammy	
△		MODIFY DRAWING	YICUN	
△		MODIFY DRAWING	Qianpu	
△		MODIFY DRAWING	Sammy	
△		ADD PART NO	Sammy	
△		MODIFY NOTES	Among	
△		ADD PART NO	Sammy	
△		MODIFY DRAWING	yan	

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS MIN.
2. CURRENT RATING: 1.5 AMP MIN.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- △ 3. PLATING: GOLD PLATING OVER NICKEL.
4. OPERATING LIFE: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

1. STORAGE: -40°C TO $+85^{\circ}\text{C}$.
 - △ 2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E526X-XX0XXX

- NO. OF CONTACT
2-2C 4-4C
6-6C
00-W/O "FRE" LOGO
△ 01-W/ "FRE" LOGO
- Gold Plating:
1-3u" 2-6u"
3-15u" 4-30u"
5-50u" 6-Pd 20u"
- Color Of Housing:
0-BLACK
△ 4-GREY PBT+15%
△ 5-GREY PBT+30%
△ 6-OYSTER WHITE
△ B-FR52 BK

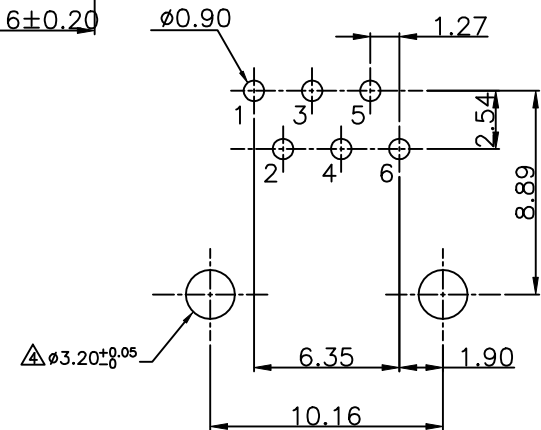

PC Board Layout
Component Side Shown
Dimension Tolerance: ± 0.05 △

DETACHED LISTS	MM (INCH)		DFTO JAMIE	DATE 10/20/97
	TOLERANCES EXCEPT AS NOTED		CHKD SAMMY	DATE 2005/3/28
			MFO	DATE
	MM	±	APPVLLUSHENG	DATE 2005/3/28
	.0 ±0.20	±		
	.00 ±0.15	±		
	.000 ±0.075	±		
	ANGLES ±			
	THIRD ANGLE PROJECTION			

FULL RISE ELECTRONIC CO., LTD

TITLE
180° TOP ENTRY PCB JACK 6P

DRAWING NO. GE523011
/PART NO. SEE NOTE

DO NOT SCALE DRAWING

SHEET X OF Y