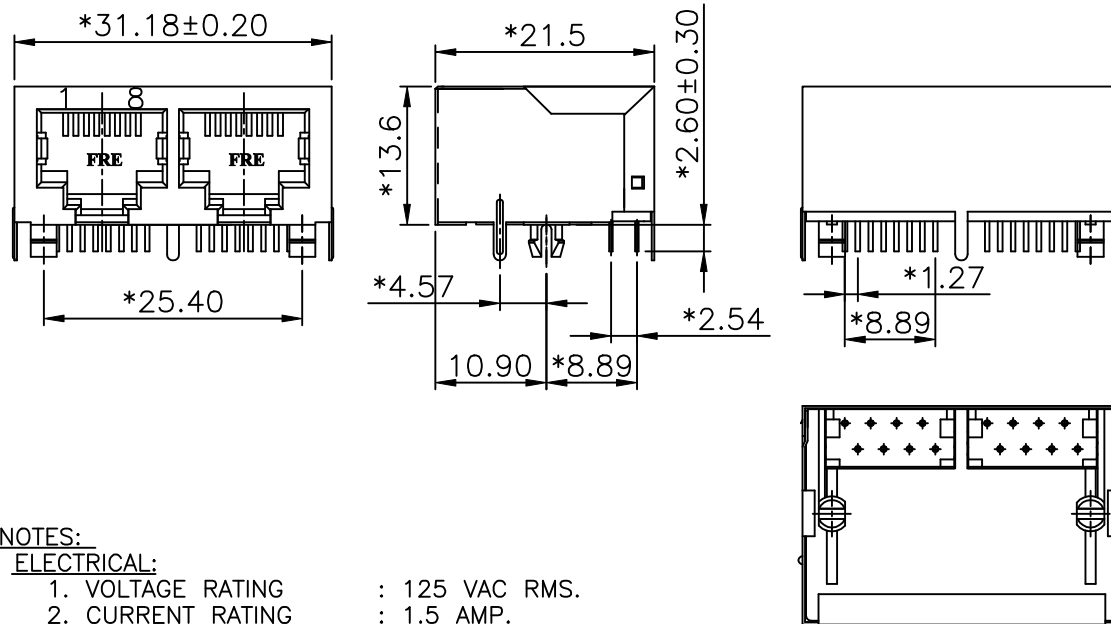


**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.


MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: E5988-1XAXBX

SHIELD:
3- TIN
5- NICKEL

GOLD THICKNESS:
1- 3u" 2- 6u" 3-15u"
4-30u" 5-50u"

1-FRONT PEG 4.57
2-FRONT PEG 4.57, WITH 3 GROUNDING TABS

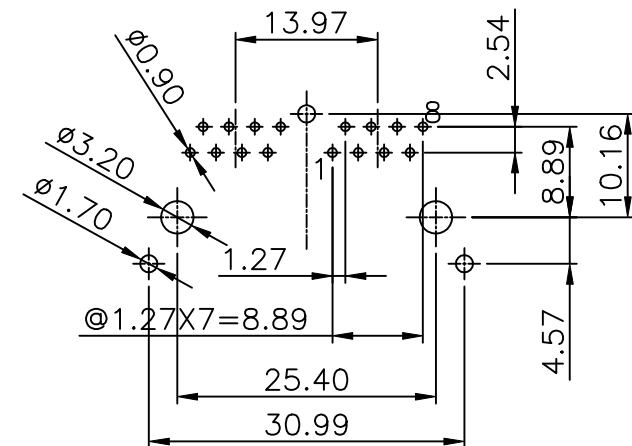

PC Board Layout Component Side Shown

DETACHED LISTS	MM (INCH)		DFTD Qianpu	DATE 11/12/04'	FULL RISE ELECTRONIC CO., LTD				
	TOLERANCES EXCEPT AS NOTED		CHKD SHAW	DATE 2004/11/13					
	MM		MFO	DATE	TITLE SIDE ENTRY FERRITE PCB JACK 2 PORT				
	.0 ±0.20		APPLV LUBING	DATE 2004/11/13					
	.00 ±0.15		MATERIAL :		DRAWING NO. GE593230 /PART NO. SEE NOTE				
	.000 ±0.075		QT*Y :					SIZE A3	REV 0
	ANGLES ±		FINISH :					DO NOT SCALE DRAWING	
			SCALE : 2:1						
	THIRD ANGLE PROJECTION				SHEET X OF Y				