
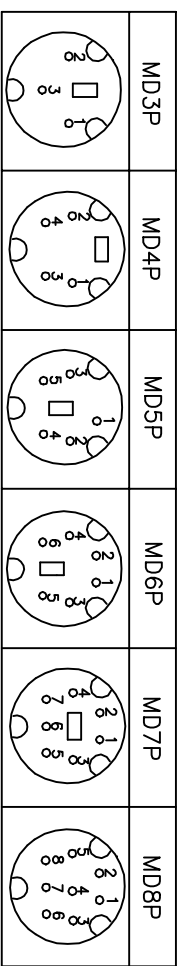
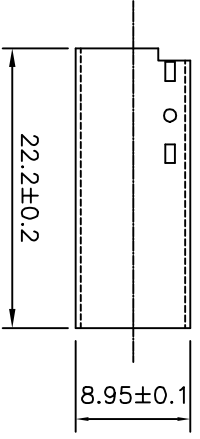




1	2	3	4	5	6	7
---	---	---	---	---	---	---

A

MATERIAL
 Insulator: PBT, rated UL94V-0
 Contacts: Brass
 Shell: Brass
 FINISHES
 Shell: Nickel plated
 CONTACT PLATING
 Underplate: 50u" Nickel
 Contact Area: 1u" Gold Flash
 Solder Tails Area: 100u" Tin/Lead or 100u" Tin/Lead Free
 ELECTRICAL
 Current rating: 1Amps max.
 Contact resistance: 30 milliohm max.
 Insulation resistance: 500 megohm min . at 500V DC
 Dielectric withstanding voltage: 500V AC at 1 minute
 Temperature Range: -55 C to +105 C



Modification	Date	Name	Date	Name	P/N
					AD-DIO-M/08-A

H	ASSMANN WSW Components		Drawing-No: ASS 0734 CO	Sheet 1/1
	Replace	Sheet		

1	2	3	4	5	6	7
---	---	---	---	---	---	---