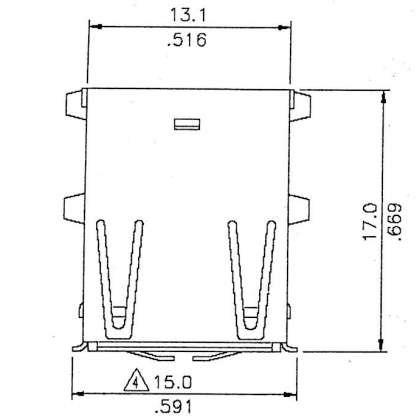

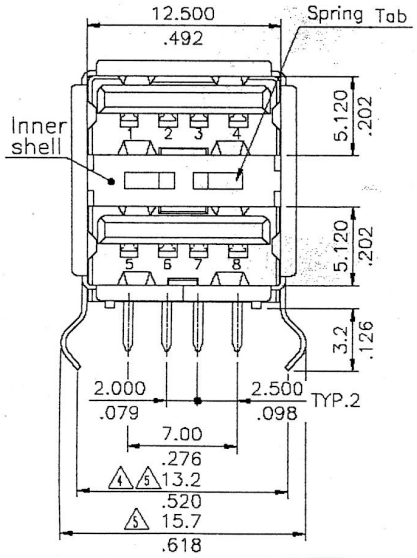

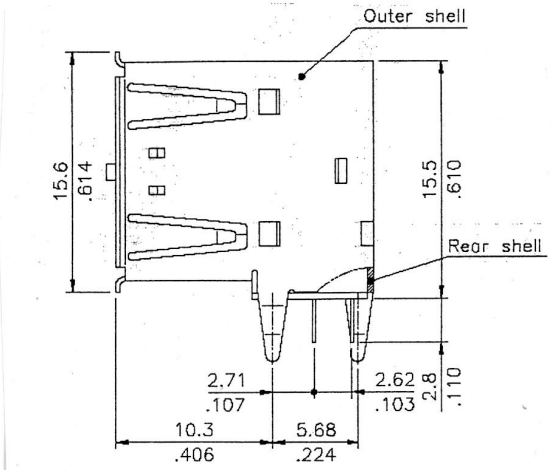

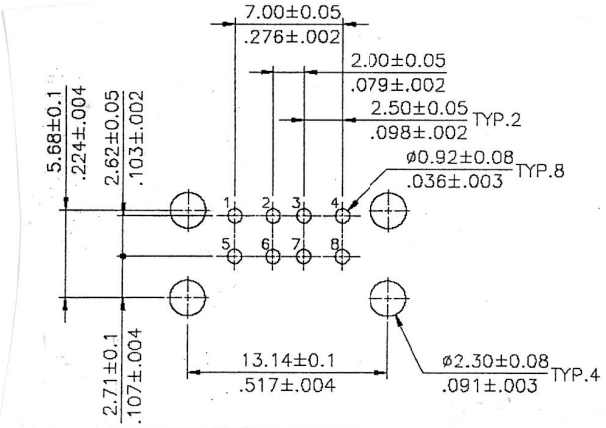

Insulator
PBT, UL94V-0, Black colour
Contacts
Phosphorbronze,t=0.25mm
Selecive Gold Flash palted over
50u" Nickel
Shell
Brass t=0.3
Finish:Nickel Plated
Withstanding voltage
500V AC(1min)
Insulation resistance
1000M min
Rated voltage and current
1.5A at 250V AC minimum
Temperature range
Operating : 0°C - +50°C
Storage : -20°C - +60°C

RoHS Compliant

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.30/.012	X.' ±
.XX ± 0.20/.008	.X" ±
.XXX ± 0.10/.004	.XX" ±

Modification	Date	Name		Date	Name
			Drawn	30.05.07	Hellwig

ASSMANN
WSW Components

Title: A-USB-A-2P
Drawing-No.: ASS 1360A CO
Sheet: 1/1
Replace: