

REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	JZ	***	19/03/2008



CHARACTERISTICS


ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW - 1	UL 758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	-	Golden contacts (0,3µm Ni/0,05µm Au min) ¹
	Dimensions	MM	
Insulation	Material	-	Polyester+flame retardant adhesive insulation
	Thickness	MM	
Reinforcement tape	Material	-	Blue polyester
	Thickness	MM	

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	40
Pitch	MM	0,50 ± 0,05
Span	MM	19,50 ± 0,10
Total width	MM	20,50 ± 0,06
Margin	MM	0,50 +0,15/-0,096
Strip length	MM	4 ± 0,8
Strip length	MM	4 ± 0,8
End thickness	MM	0,30 ± 0,05
Insulated length	MM	196 ± 4
Reinforcement length	MM	8 ± 2
Strip difference S-S'	MM	0,30 max

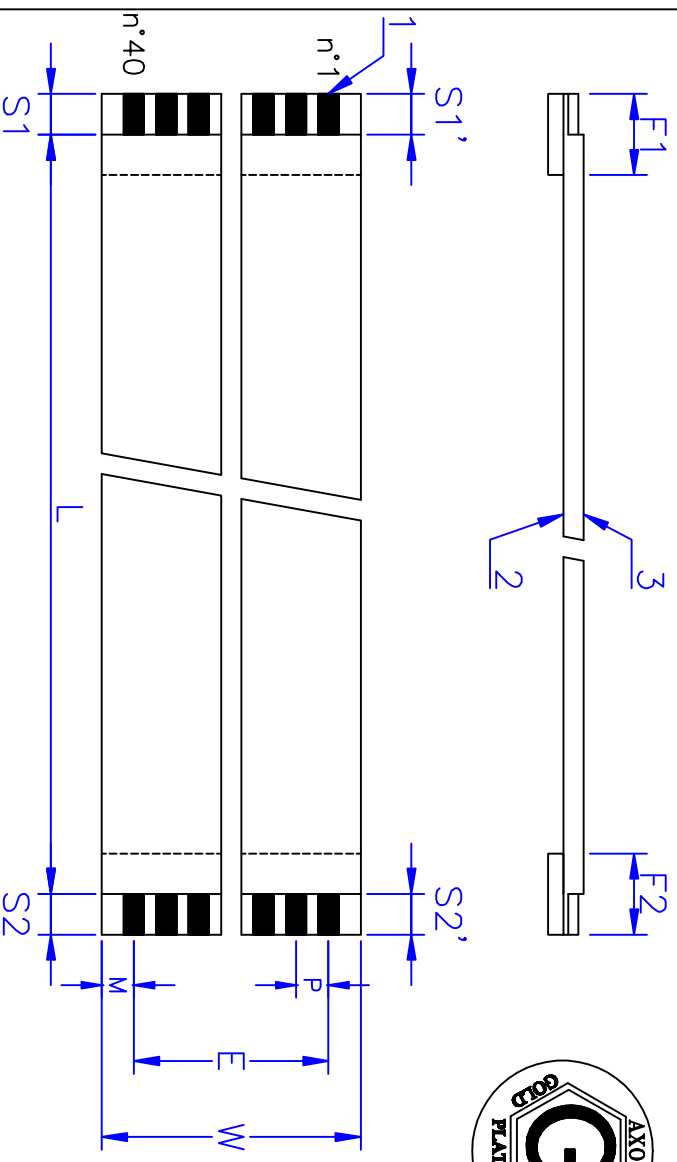

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °

axxon'
CABLE & INTERCONNECTIBLE

AXONCABLE SAS
61210 MONTMIRAIL - FRANCE
TEL : +33 3 28 61 70 00
FAX : +33 3 28 61 28 63
www.axxon-cable.com

CUSTOMER N° :
Ineltra

FILE N° :
SJ08173A.dwg

TITLE :
FFCO,50A40/0196S4,0-4,0-08,0-08,0SAKK/AU

SIZE	AXON'SA N°	REV
A4	SJ08173	A
SCALE : N.D.		Prod. Doc.
		SHEET 1 of 1

This drawing is the property of Axxon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from AxxonCable