

1

2

3


4

5

6


7

A

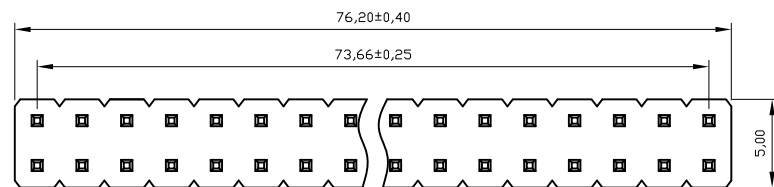

A


B

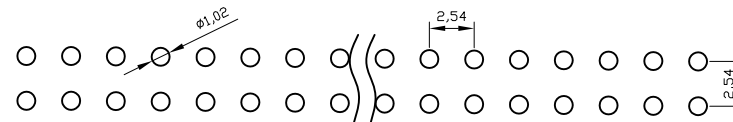

P.C.B LAYOUT


B

C

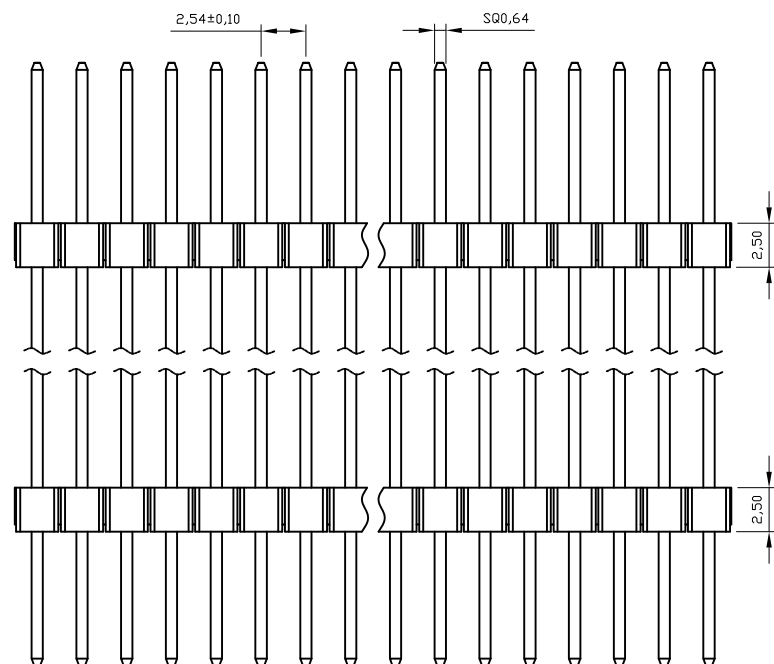

C

D

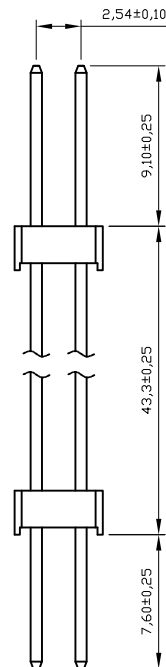

D

E

NOTES:

MATERIAL

1. Insulator Material: PA6T+30%GF(UL94V-0), Black
2. Contact Material : Brass
3. Contact Plating : 1u" Au Over Ni

ELECTRICAL

1. Current Rating : 3.0Amps/contact max
2. Withstand Voltage : 1000V AC/minute
3. Contact Resistance : 20mΩ/contact max
4. Insulation Resistance: 1000MΩ min at Voltage=100V

ENVIRONMENTAL

1. Operation Temperature: -40°C to +105°C
2. Mechanical life cycle: min.200
3. Soldering Temperature: +260°C max


E

F

F

RoHS compliant

Unit: mm

Scale	Free						Date	Name	Customer-No.
TOLERANCE		⑤	Change of Plant	31.01.2012	Lucas	Drawn	26.02.2009	Dean	ASSMANN WSW-No. A-DSL-DG-G60-9/43/7
X.	±0.50	④	Add packing drawing	09.12.2010	Dean	Approved	31.01.2012	Hellwig	
X.X	±0.30	③	Correct drawing	03.04.2010	Rale				
X.XX	±0.20	②	Modify plating	03.03.2010	Dean				Drawing-No.
X.XXX	±0.10	①	Drawn	26.02.2009	Dean				ASS 3386 CO
DIM	TOL								rev05
Angle	±5°	Id.	Modification	Date	Name			Replace	Sheet

G

H

H

1

2

3

4

5

6

7

SV334