

NOTES:




MATERIAL

- 1. Insulator Material: PA6T+30%GF(UL94V-0)
 - 2. Contact Material : Phosphor Bronze
 - 3. Contact Plating : Au Over Ni
- ELECTRICAL**
- 1. Current Rating : 2.0AMP
 - 2. Withstand Voltage : 500V AC/DC
 - 3. Contact Resistance : 20mΩ max
 - 4. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing : Tube

Recommended PCB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

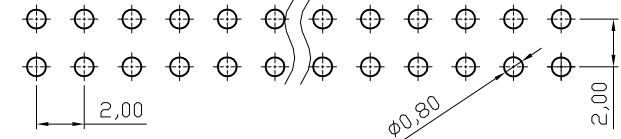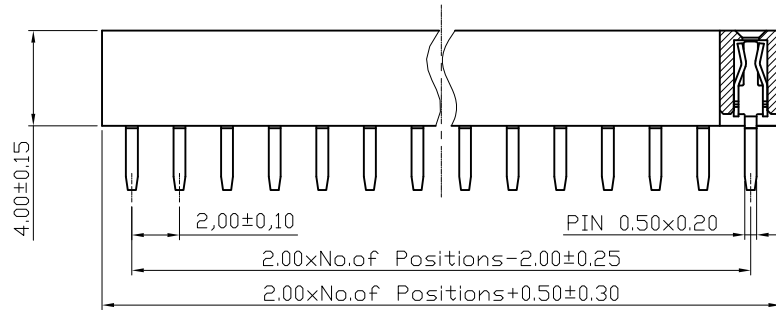

SECTION B-B

SECTION A-A

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	30.03.2009	Dean	
X.X	±0.40					Approved	30.03.2009	Hellwig	ASSMANN WSW-No. A-BL200-DG-GxxD
X.XX	±0.25								Drawing-No.
X.XXX	±0.15								ASS 3446 CO
DIM	TOL								rev01
Angle	±3°								
		①	Drawn	30.03.2009	Dean			Replace	SHEET
		Id.	Modification	Date	Name				



ASS 3446 CO rev01

Replace SHEET