


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Crection	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10

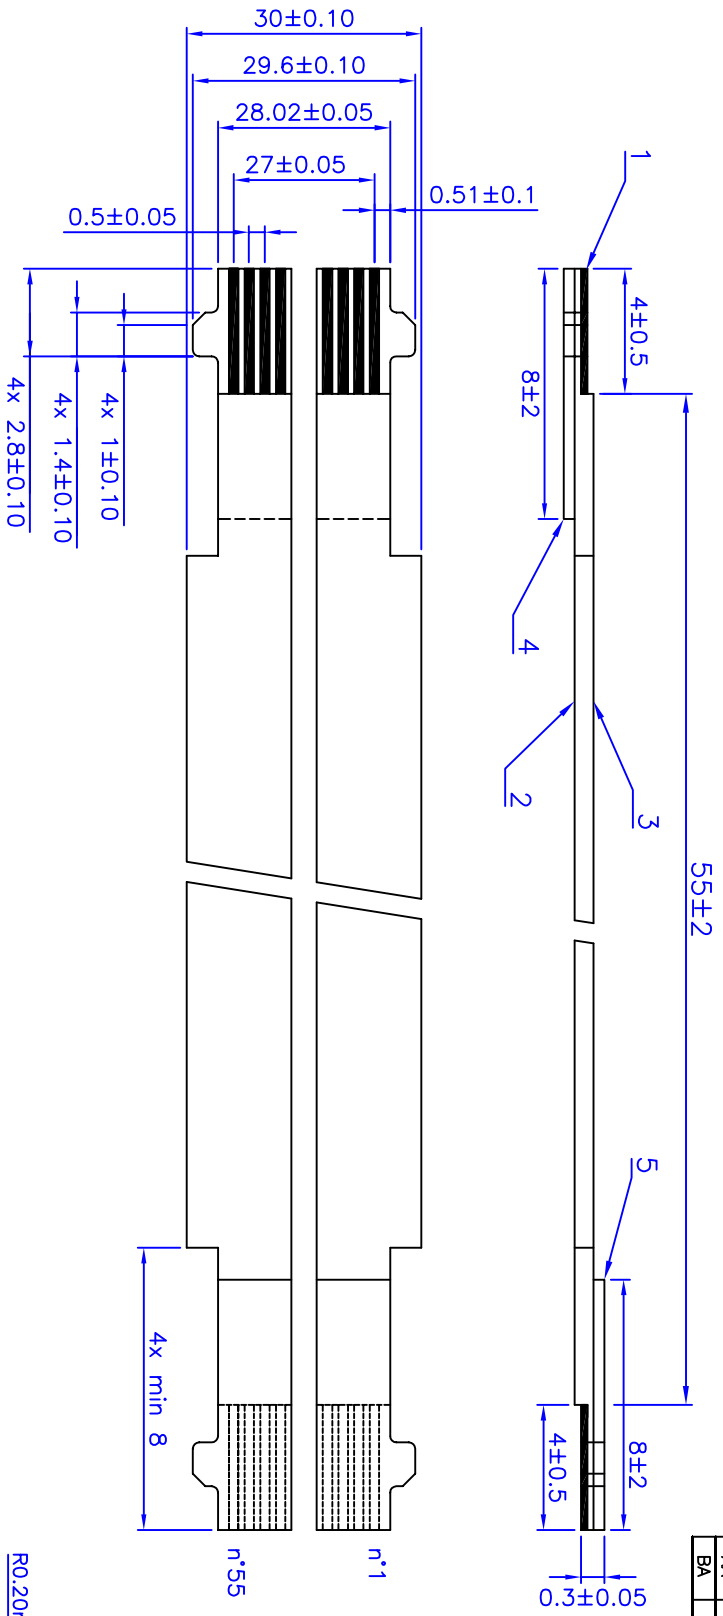


- camera checking

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

CHARACTERISTICS

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	-	golden contacts (0,3µm Ni/0,05µm Au min)	1
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	0,155 mm nominal	



AVX6288—shape

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °

PRE CAD 4.0/Janvier 2007/FR-LM  
CUSTOMER N°

FILE N° SJ09767B.dwg  
SIZE A4  
SCALE : N.D.

AXON<sup>®</sup> GmbH N° SJ09767

AXON<sup>®</sup> KABEL GmbH  
71229 LEONBERG  
TEL : +49 7152 97892-0  
FAX : +49 7152 97892-96  
www.axon-cable.com

TITLE FFC0.50D55/0055S4.0-4.0-08.0-08.0SAKK/AU N spe tol

REV: A  
PdL: Doc.  
SHEET 1 of 1

This drawing is the property of Axon<sup>®</sup>, and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable