



REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Credition	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10

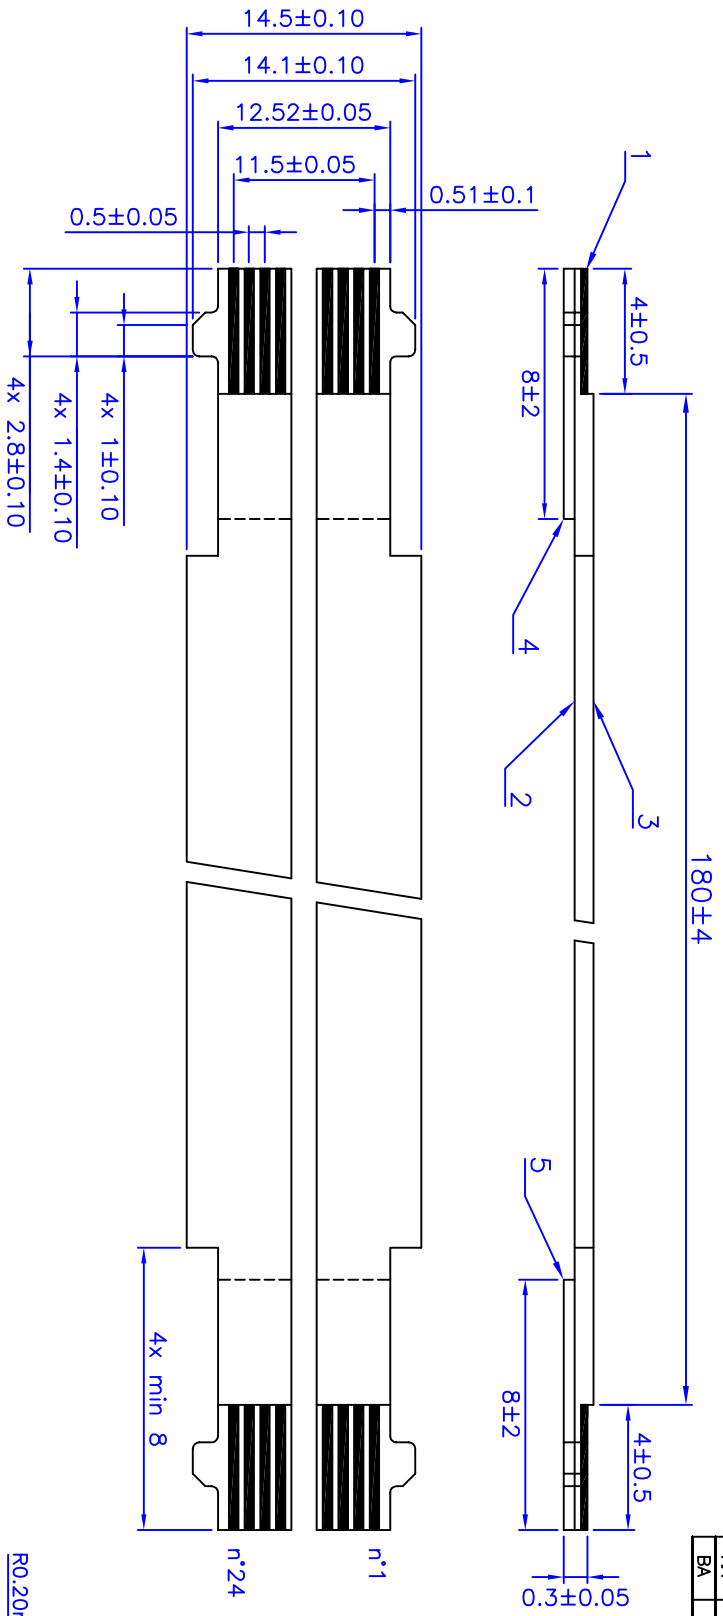

- camera checking



AVX6288—shape

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	—
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	—	Golden contacts (0,5µm Ni/0,05µm Au min)	1
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	0,155 mm nominal	

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °

PRE CAD 4.0/Amw 2007/FR-LM
CUSTOMER N°

FILE N° SJ09772B.dwg
SCALE : N.D.

AXON[®] GmbH N° SJ09772

AXON[®] KABEL & VERBINDUNGSSYSTEME
71229 LEONBERG
TEL : +49 7152 97882-0
FAX : +49 7152 97882-86
www.axon-cable.com

TITLE FFC0.50A24/0180S4.0-4-0-08.0-08.0SAKK/AU N spe tol

REV: A
PdL: A
Doc. SHEET 1 of 1

This drawing is the property of Axon[®], and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable