


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Crection	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10

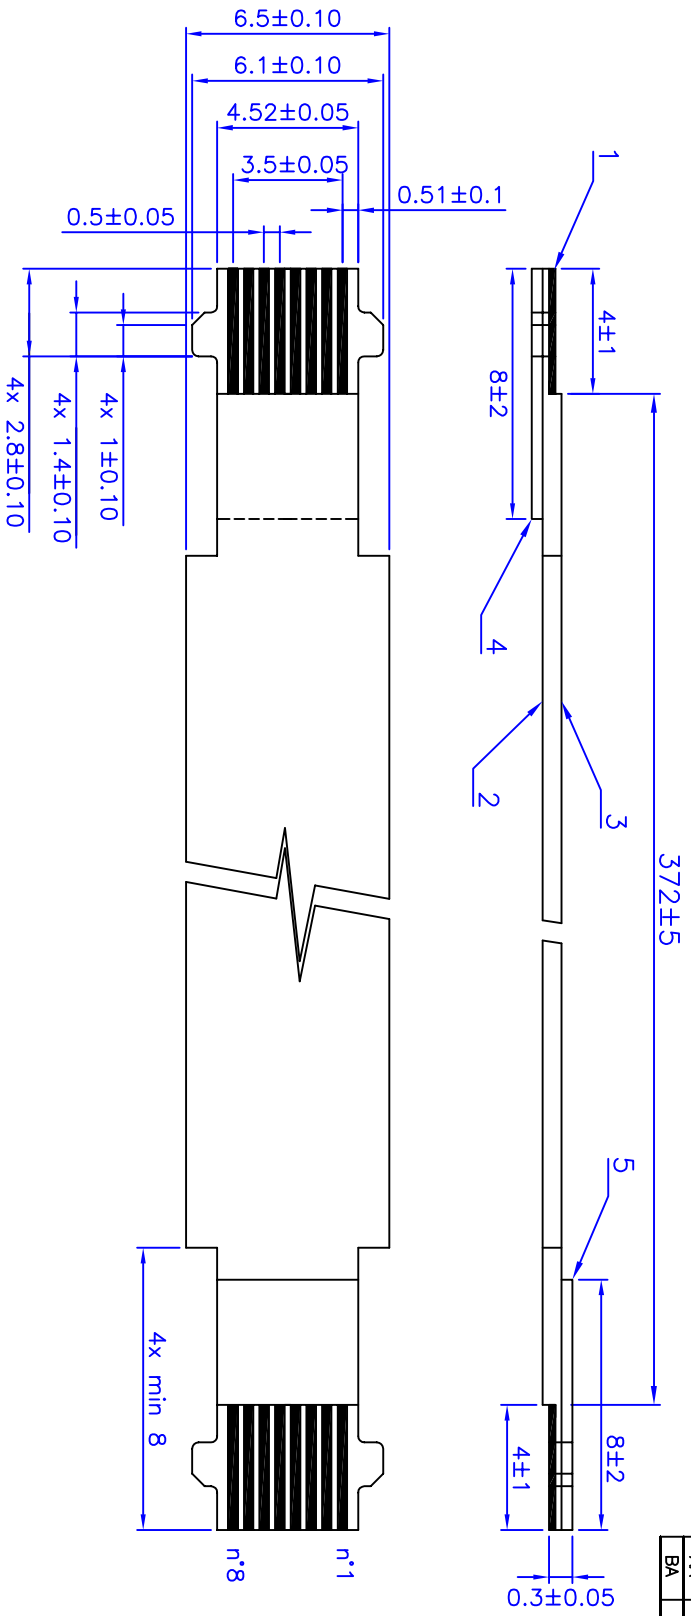


- camera checking

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	-
Voltage rating	60 V AC max	UL style 2896
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	golden contacts (0,3µm Ni/0,05µm Au min)	1
	Dimensions	0,30 x 0,035 mm	
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	0,043 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	0,226 mm nominal	



AVX6288—shape

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °

PRE CAD 4.0/Janvier 2007/FR-LM  
CUSTOMER N°

AXON KABEL & VERBINDUNGSSYSTEME  
71229 LEONBERG  
TEL : +49 7152 97892-0  
FAX : +49 7152 97892-96  
www.axon-cable.com

AXON GmbH N°  
SU09773

FILE N°  
SU09773B.dwg

TITLE  
FFC0.50D08/0372E4.0-4.0-08.0-08.0EABB/AU N spe tol

SIZE A4  
SCALE : N.D.

REV A  
PdL  
Doc.  
SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable