



REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation (Just sample)	NT		22/12/09
BA	Gold plated version	NT		22/12/09
BB	Modif Tolerances	JZ	***	14/04/10

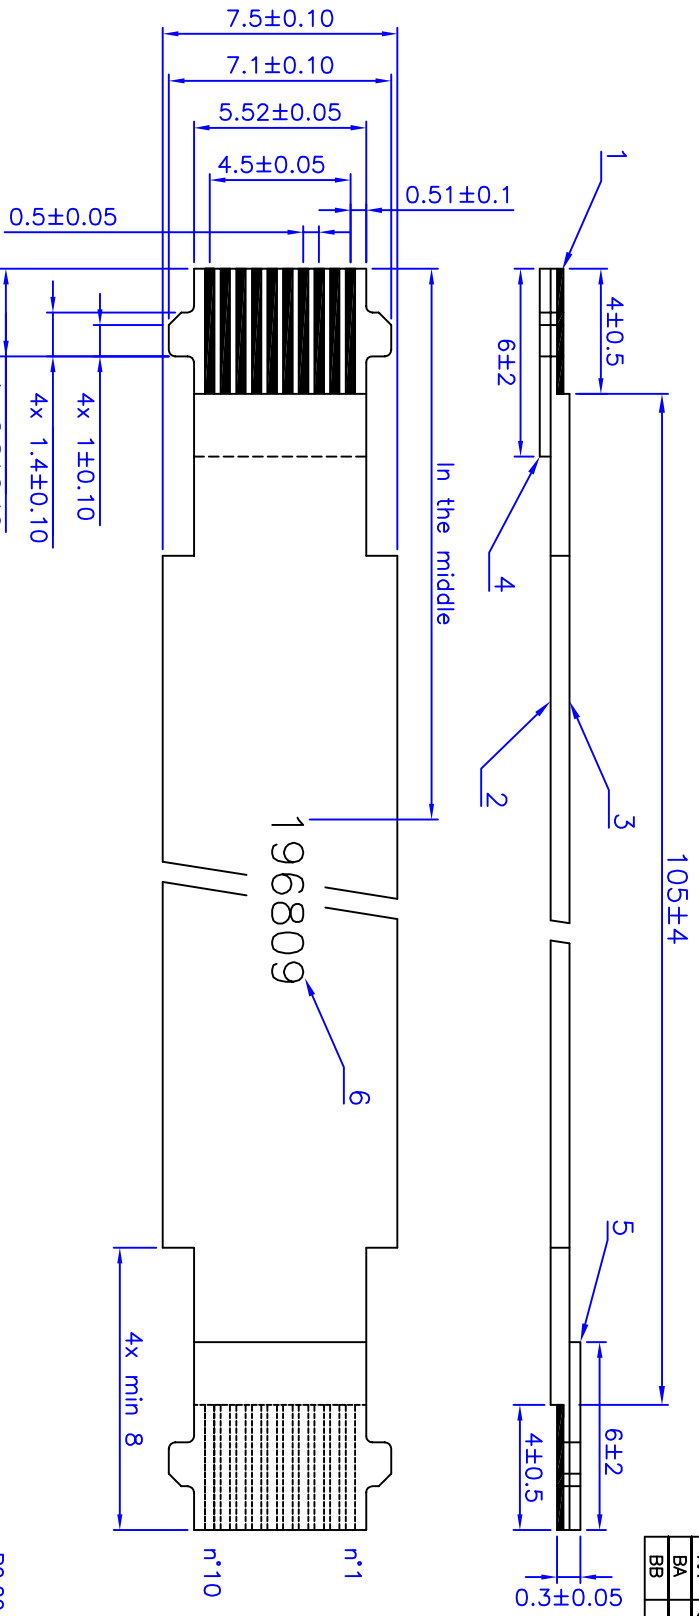

- camera checking



AVX6288—shape

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 Mohm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	-	Au Plating (min. 0,3µm Ni/min. 0,05µm Au)	1
Insulation	Dimensions	MM 0,30 x 0,10 mm	2 3
	Material	Polyester+flame retardant adhesive insulation	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	MM 0,155 mm nominal	
Ink jet marking on side 3	196809		6
Ink	Ink jet black	Position: in the middle Height : 2,5 mm	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °
PRE CAD 4.0/June 2007/FR-LM
CUSTOMER N°

AXON KABEL & VERBINDUNGSSYSTEME

 AXON KABEL GmbH
 71229 LEONBERG
 TEL : +49 7152 97892-0
 FAX : +49 7152 97892-96
 www.axon-cable.com

FILE N° S:J09802B.dwg	SIZE A4	SCALE : N.D.	AXON GmbH N° S:J09802	REV A	B
TITLE FFCO_50D10/010554.0-4.0-06.0-06.05AKK/AU N M spe tol				Prod.	Doc.
				SHEET 1 of 1	

This drawing is the property of Axon, and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable