



| REV | MODIFICATIONS | DRAWN BY | CHECKED BY | DD/MM/YY |
|-----|------------------------|----------|------------|----------|
| AA | Creation (Just sample) | NT | | 22/12/09 |
| BA | Gold plated version | NT | | 22/12/09 |
| BB | Modif Tolerances | JZ | *** | 14/04/10 |

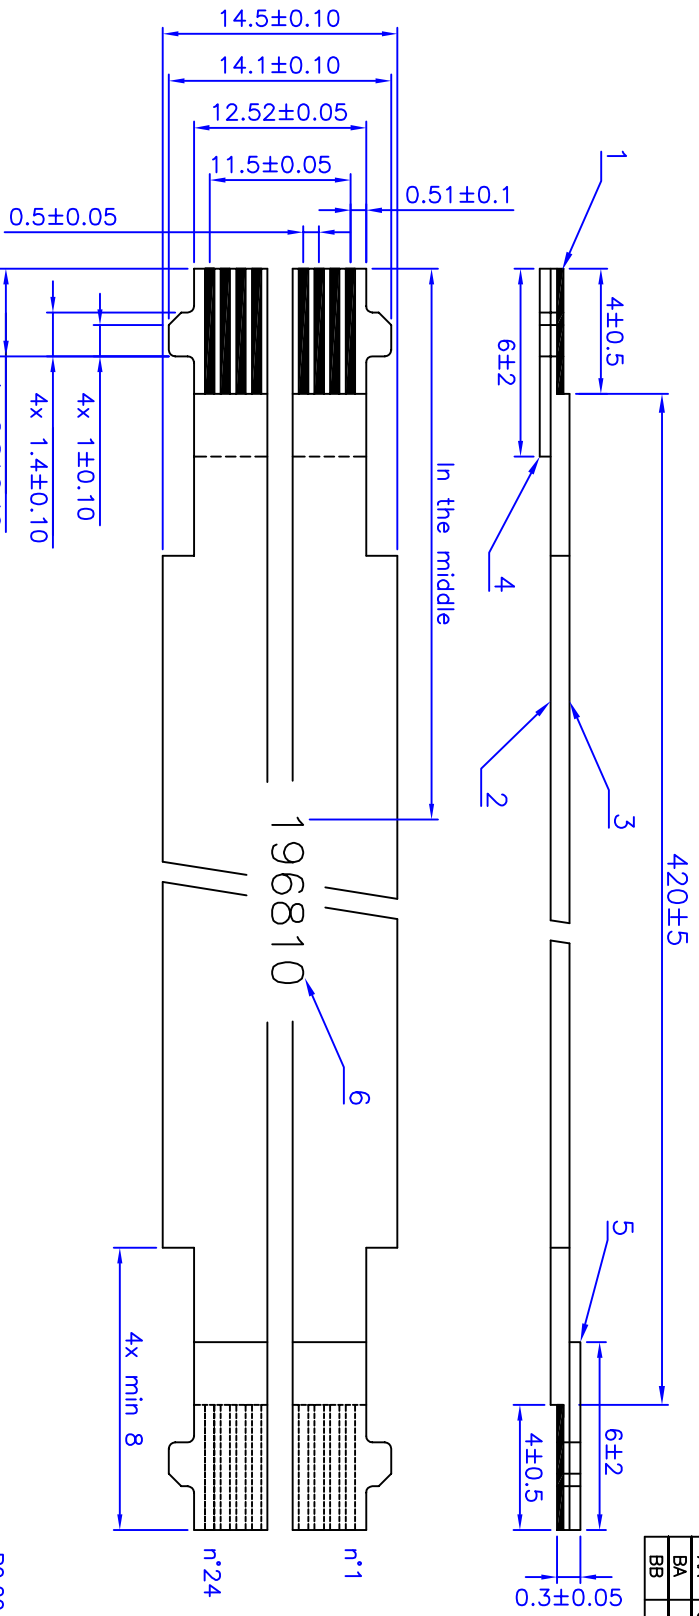

-Camera checking



AVX6288—shape

CHARACTERISTICS

| ITEMS | VALUE | TEST METHOD |
|--|-----------------|----------------|
| Resistance of conductor | 1730 Ohm/km max | - |
| Insulation resistance (conductor to conductor) | 10 Mohm.m min | 500 V DC |
| Dielectric test | 200 V AC | 1 minute |
| Temperature rating | -40°C to 105°C | - |
| Voltage rating | 60 V AC max | UL style 20624 |
| Flame resistance | VW-1 | UL758 |

COMPOSITION

| COMPONENTS | UNITS | SPECIFICATIONS | ITEM |
|---------------------------|---------------|---|-----------------|
| Conductor | Material | Au Plating (min. 0,3µm Ni/min. 0,05µm Au) | 1 |
| | Dimensions | 0,30 x 0,035 mm | |
| Insulation | Material | Polyester+flame retardant adhesive insulation | 2 3 |
| | Dimensions | 0,043 mm nominal | |
| Reinforcement tape | Material | Blue polyester | 4 5 |
| | Dimensions | 0,226 mm nominal | |
| Ink jet marking on side 3 | 196810 | | 6 |
| Ink | Ink jet black | Position: in the middle | Height : 2,5 mm |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °
CUSTOMER N°
PRE CAD 4.0/Amw 2007/FR-LMFILE N°
S:\09803\BB.dwg
SIZE A4
SCALE : N.D.

axxon'
KABEL & VERBINDUNGSSYSTEME
AXON KABEL GmbH
71229 LEONBERG
TEL : +49 7152 97892-0
FAX : +49 7152 97892-96
www.axxon-cable.com

| | | | |
|----------------------------|--|---------------|---------|
| FILE N° | S:\09803\BB.dwg | AXON' GmbH N° | SU09803 |
| TITLE | FFC0_50D24/0420E4.0-4.0-06.0-06.0EABB/AU N M spe tol | REV A | B |
| CUSTOMER N° | | Prod. | Doc. |
| PRE CAD 4.0/Amw 2007/FR-LM | | SHEET | 1 of 1 |

This drawing is the property of Axxon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axxon Cable