


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10
CA	modification of L	ToH	JZ	27/04/10

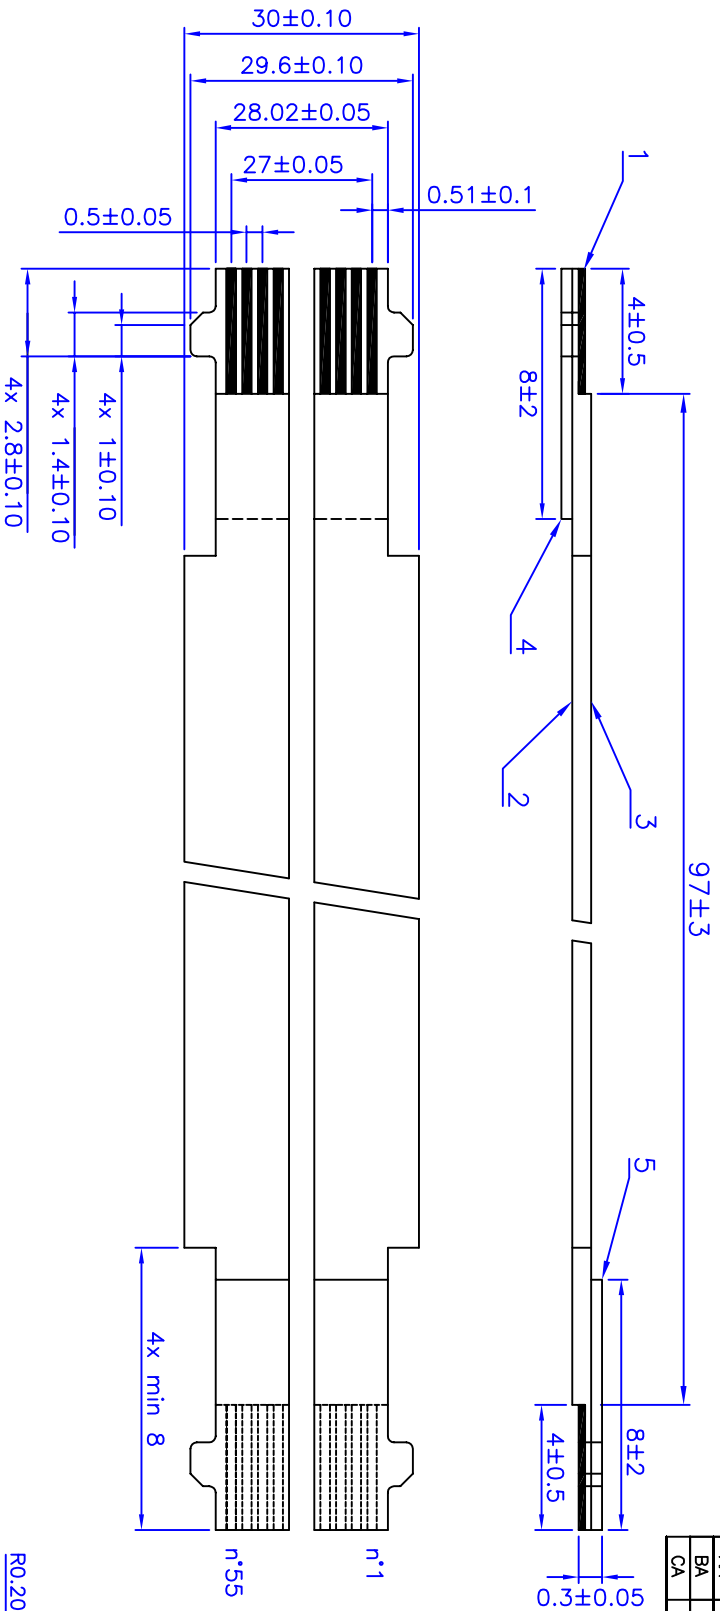


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	Golden contacts (0.3µm Ni/0.05µm Au min)	1
	Dimensions	0.30 x 0.10 mm	
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	0,155 mm nominal	



AVX6288—shape

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °

PRE-DWG: A30/Revme 2007/FR-LM
CUSTOMER N°

FILE N° S:\09754C.dwg
SCALE : N.D.

AXON KABEL GmbH
KABEL & VERBINDUNGSSYSTEME
71229 LEONBERG
TEL : +49 7152 97892-0
FAX : +49 7152 97892-96
www.axon-cable.com

TITLE
FFC0.50D55/09754-0-4-0-08-0-08.0SAKK/AU N spe tol

AXON GmbH N° S:\09754

REV: C Prod: A Doc: A
SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable