


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Credition	ToH	JZ	01/06/10



camera checking

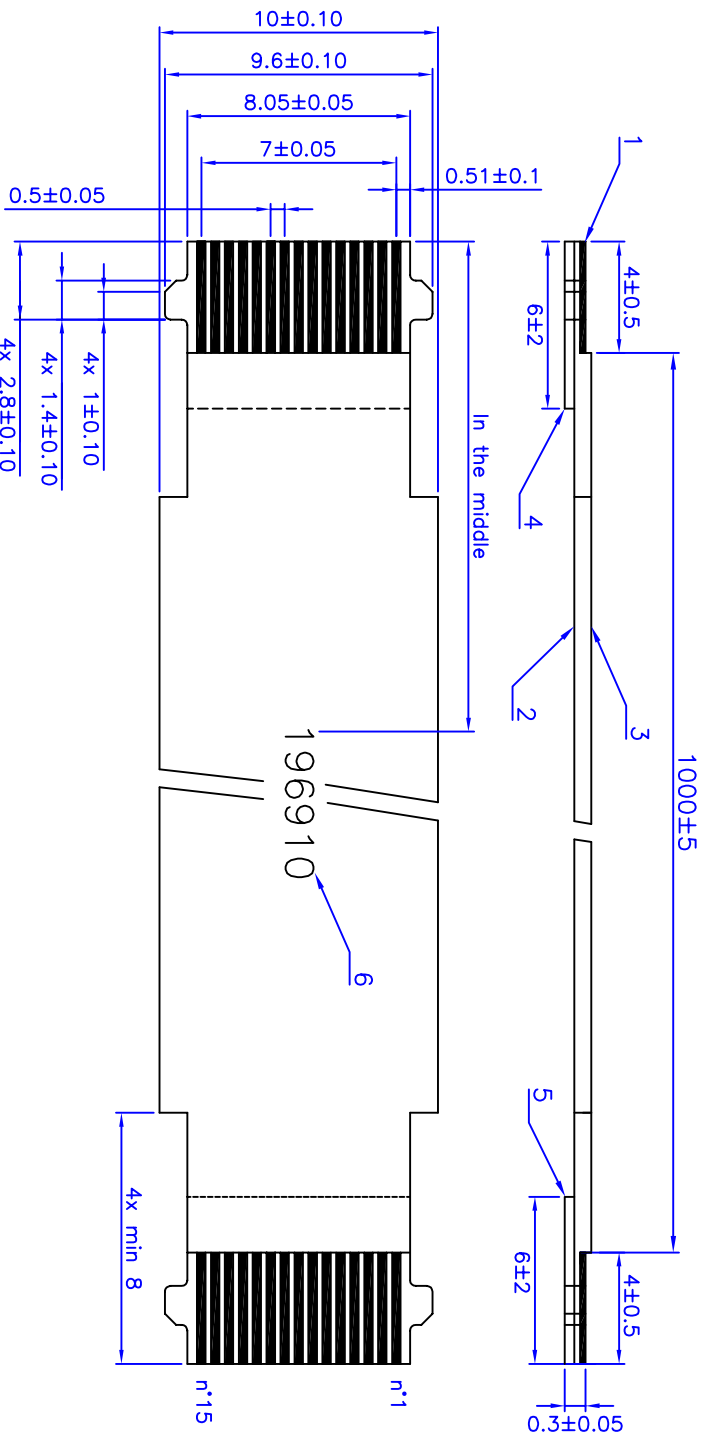


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	-	Au Plating (min. 0,3µm Ni/min. 0,05µm Au)	1
Insulation	Dimensions	MM 0,30 x 0,10 mm	2 3
	Material	Polyester+flame retardant adhesive insulation	
Reinforcement tape	Dimensions	MM 0,086 mm nominal	4 5
	Material	Blue polyester	
Ink jet marking on side 3	MM 0,155 mm nominal		6
Ink jet marking on side 3	Position: in the middle	Height : 2,5 mm	



AVX6288—shape



UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °.		FILE NO: A0/Rev: 2007/FR-LM	
CUSTOMER N°		TITLE	
Sj10326A.dwg		FFCO.50A15/100054.0-4.0-06.0-06.OSAKK/AU N M spe tol	
SIZE: A4	SCALE: N.D.	AXON GmbH N°	REV: A
		Sj10326	Doc. A
			SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable