


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Credition	ToH	JZ	01/06/10



camera checking

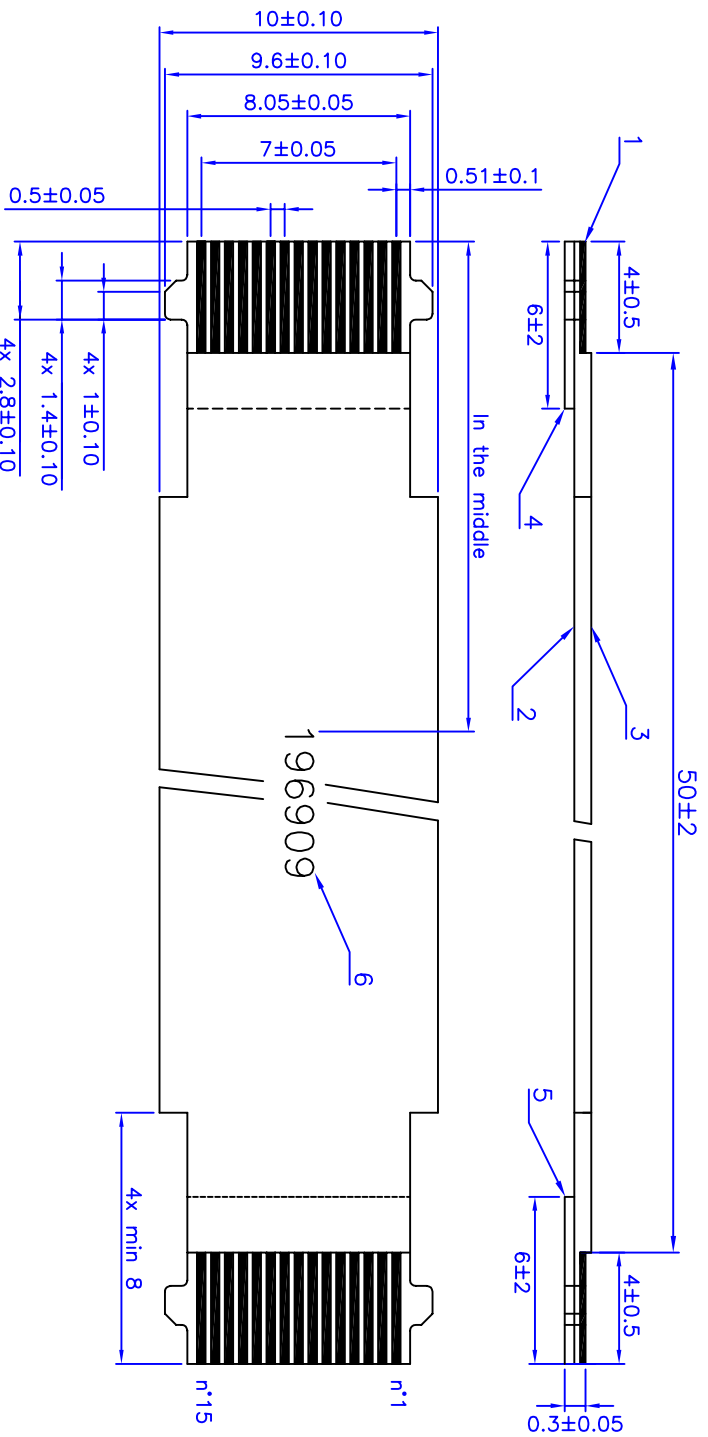


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	Au Plating (min. 0,3µm Ni/min. 0,05µm Au)	1
	Dimensions	MM 0,30 x 0,10 mm	
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	MM 0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	MM 0,155 mm nominal	
Ink jet marking on side 3	Position: in the middle	Height : 2,5 mm	6



AVX6288—shape

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °
CUSTOMER N°

AXON KABEL GmbH
71229 LEONBERG
TEL : +49 7152 97892-0
FAX : +49 7152 97892-96
www.axon-cable.com

PRE CAD A30/Revme 2007/FR-LM
CUSTOMER N°

TITLE
FFCO_50A15/005054.0-4.0-06.0-06.0SAKK/AU N M spe tol

FILE N°
Sj10327A.dwg

REV A
Prod A
SHEET 1 of 1



SIZE A4
SCALE : N.D.

AXON GmbH N°
Sj10327

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable