
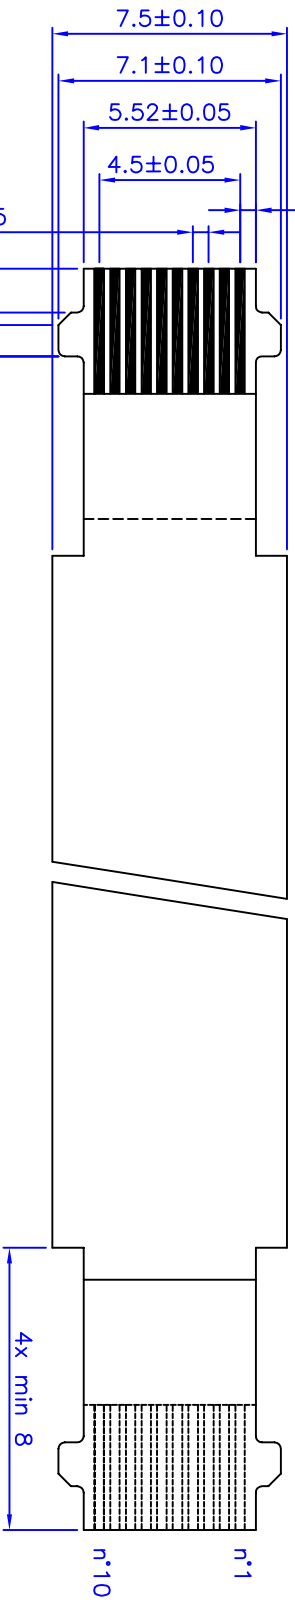


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Credition	ToH	JZ	27/07/10

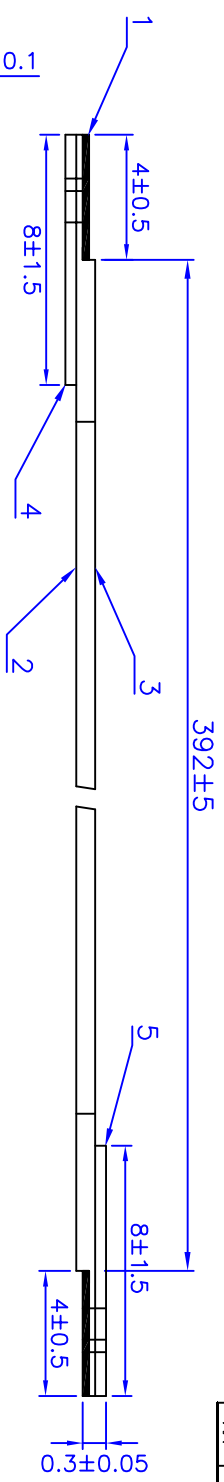


– camera checking

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	–
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	–40°C to 105°C	UL style 20706
Voltage rating	60 V AC max	UL758
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	–	Tin plated copper (2 µm typ)	1
Insulation	Dimensions	0,30 x 0,10 mm	2 3
	Material	Polyester+flame retardant adhesive insulation	
Reinforcement tape	Dimensions	0,086 mm nominal	4 5
	Material	Blue polyester	
	Dimensions	0,155 mm nominal	



AVX6288–shape

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °

PRE-DRG A30/Revme 2007/FR-LM
CUSTOMER N°

FILE N° S110450A.dwg
TITLE FFC0.50D10/039254.0-4.0-08.0-08.05AKK/N spe tol

axon
KABEL & VERBINDUNGSSYSTEME

AXON KABEL GmbH
71229 LEONBERG
TEL : +49 7152 97892-0
FAX : +49 7152 97892-56
www.axon-cable.com

AXON GmbH N° S110450

REV A
Prod 1
Doc. A
SHEET 1 of 1

This drawing is the property of Axon, and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon Cable