


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD /MM /YY
AA	Creation	NT	JZ	21/12/09
BA	Gold	JZ	***	14/04/10
CA	modi. of cond. and L	ToH	JZ	27/04/10
DA	modification	ToH	JZ	05/08/10
DB	modi. pos of marking	ToH	***	23/08/10
E1	-	JZ	***	20/01/12

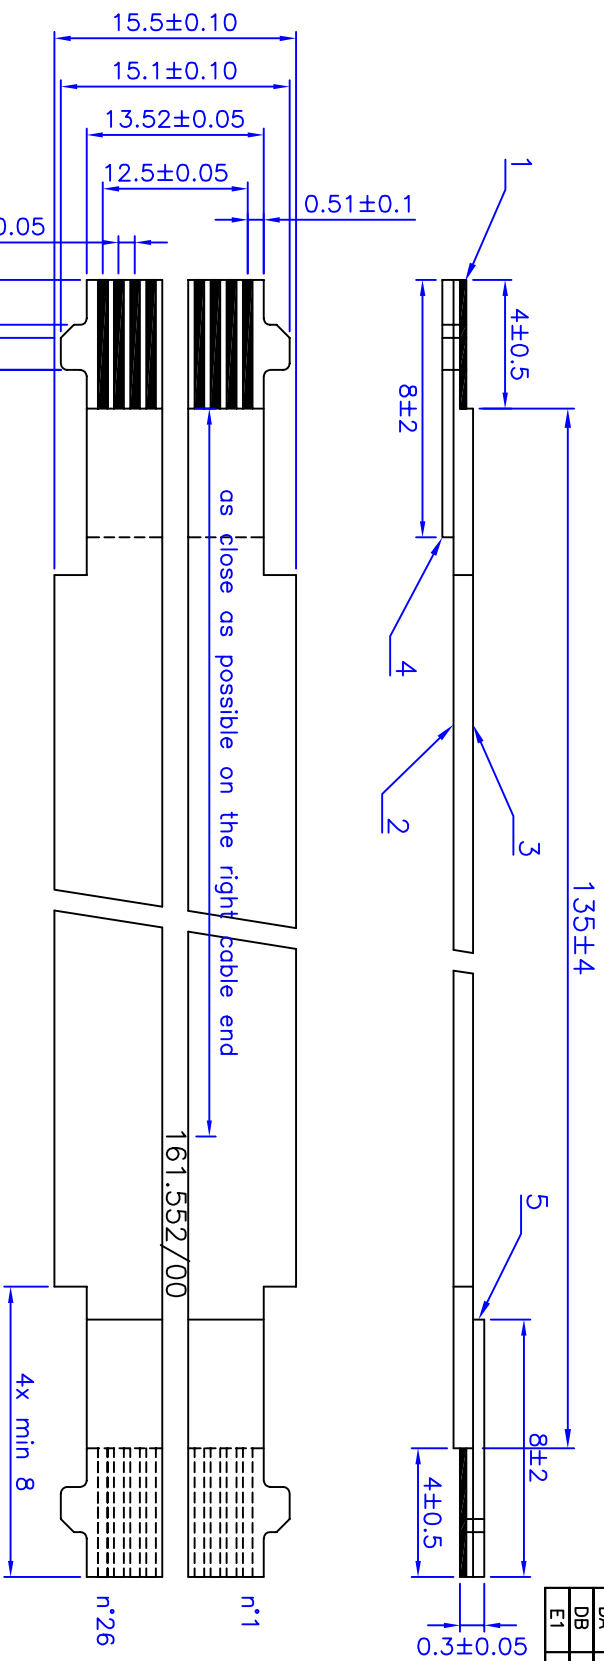

- camera checking


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test	200 V AC	1 minute
Temperature rating	-40°C to 105°C	
Voltage rating	60 V AC max	UL style 20706
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	Golden contacts (0,3µm Ni/0,05µm Au min)	1
	Dimensions	0,30 x 0,10 mm	
Insulation	Material	Polyester-flame retardant adhesive insulation	2 3
	Dimensions	0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	0,125 mm nominal	

Ink jet marking on side itemized 3 : 161.552/00
Ink : Ink jet black Height : 2,5 mm Position : right cable end



AVX6288-shape

axxon'
KABEL & VERBINDUNGSSYSTEME

AXXON' KABEL GmbH
71229 LEONBERG
TEL. : +49 7152 97992-0
FAX. : +49 7152 97992-86
www.axxon-cable.com

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.

CUSTOMER N°
161.552/00

FILE N°
SJ09772E1.dwg

TITLE
FFCO.50D26/0135S4.0-4.0-08.0-08.OSAKK/AU M N spe tol

AXXON' GmbH N°
SJ09772

REV. E 1
Prod. Doc.
SHEET 1 of 1

This drawing is the property of Axxon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axxon'Cable