
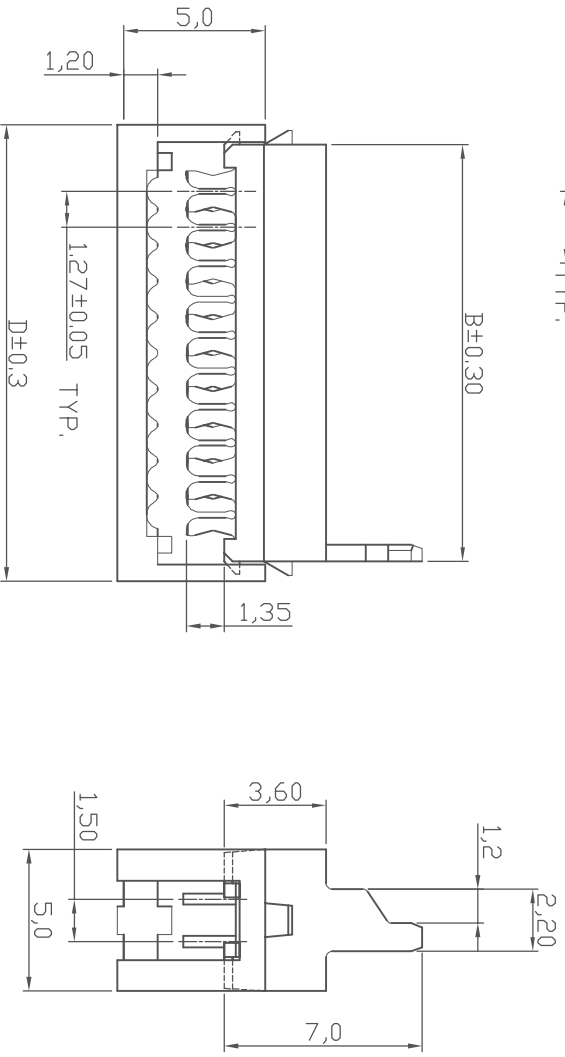


1	2	3	4	5	6	7
---	---	---	---	---	---	---

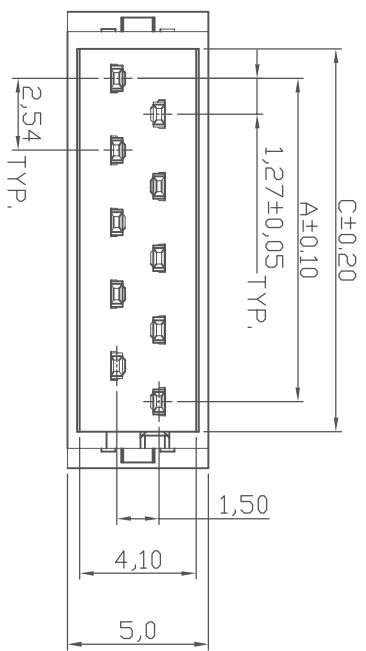

- NOTES:**
- Insulation:
Base & Cover: Glass Filled Polyester UL94V-0
 - Contact : Phosphor Bronze
 - Plating : Matte Tin over Nickel
 - Accommodated Cables:
1.27 mm(.050")Center spacing Flat
Cable Insulator OD:0.85 mm dia.
 - Construction: AWG #28(7/0.127 mm)
 - Packing : A-30-xx-P1310 :Tube(Standard)
A-30-xx-P131R :Tape & Reel

A=1.27 X NO. OF Spaces
 B=A+3.3
 C=A+2.1
 D=A+4.7
 * Available in 4 ~ 26 Circuits

RoHS compliant

Scale	1:1											
TOLERANCE												
.X	±0.30/012			Drawn	18.08.2006	Helwig						
.XX	±0.20/008			Approved	18.12.2009	Helwig						
.XXX	±0.10/004	③	Delete Inch									
DIM	TOL	②	Packing detail added		06.05.2009	Dean						
X.°	±1°	①	Drawn		18.08.2006	Helwig						
Angle	TOL											
UNIT	mm/inch		Modification									

1	2	3	4	5	6	7
---	---	---	---	---	---	---



Customer-No.	
ASSMANN WSW-No.	A-30-xx-P1310 A-30-xx-P131R
Drawing-No.	ASS 2056 CO
Replace	rev03

SHEET
1 OF 2

H	G	F	E	D	C	B	A
---	---	---	---	---	---	---	---

	1	2	3	4	5	6	7																																																																																		
A								A																																																																																	
B								B																																																																																	
C								C																																																																																	
D	<table border="1"> <thead> <tr> <th rowspan="2">Circuits</th> <th colspan="3">Dimension</th> </tr> <tr> <th>A</th> <th>B</th> <th>W1</th> <th>W2</th> <th>W3</th> </tr> </thead> <tbody> <tr><td>4</td><td>11.0</td><td>6.0</td><td>13.0</td><td>23.0</td><td>13.0</td></tr> <tr><td>6</td><td>17.0</td><td>6.0</td><td>18.0</td><td>28.0</td><td>18.0</td></tr> <tr><td>8</td><td>17.0</td><td>6.0</td><td>18.0</td><td>28.0</td><td>18.0</td></tr> <tr><td>10</td><td>21.0</td><td>6.0</td><td>22.0</td><td>32.0</td><td>22.0</td></tr> <tr><td>12</td><td>21.0</td><td>6.0</td><td>22.0</td><td>32.0</td><td>22.0</td></tr> <tr><td>14</td><td>24.0</td><td>6.0</td><td>25.0</td><td>35.0</td><td>25.0</td></tr> <tr><td>16</td><td>29.0</td><td>6.0</td><td>30.0</td><td>40.0</td><td>30.0</td></tr> <tr><td>18</td><td>29.0</td><td>6.0</td><td>30.0</td><td>40.0</td><td>30.0</td></tr> <tr><td>20</td><td>32.0</td><td>6.0</td><td>33.0</td><td>43.0</td><td>33.0</td></tr> <tr><td>22</td><td>36.0</td><td>6.0</td><td>37.0</td><td>47.0</td><td>37.0</td></tr> <tr><td>24</td><td>36.0</td><td>6.0</td><td>37.0</td><td>47.0</td><td>37.0</td></tr> <tr><td>26</td><td>39.0</td><td>6.0</td><td>40.0</td><td>50.0</td><td>40.0</td></tr> </tbody> </table>							Circuits	Dimension			A	B	W1	W2	W3	4	11.0	6.0	13.0	23.0	13.0	6	17.0	6.0	18.0	28.0	18.0	8	17.0	6.0	18.0	28.0	18.0	10	21.0	6.0	22.0	32.0	22.0	12	21.0	6.0	22.0	32.0	22.0	14	24.0	6.0	25.0	35.0	25.0	16	29.0	6.0	30.0	40.0	30.0	18	29.0	6.0	30.0	40.0	30.0	20	32.0	6.0	33.0	43.0	33.0	22	36.0	6.0	37.0	47.0	37.0	24	36.0	6.0	37.0	47.0	37.0	26	39.0	6.0	40.0	50.0	40.0	D
Circuits	Dimension																																																																																								
	A	B	W1	W2	W3																																																																																				
4	11.0	6.0	13.0	23.0	13.0																																																																																				
6	17.0	6.0	18.0	28.0	18.0																																																																																				
8	17.0	6.0	18.0	28.0	18.0																																																																																				
10	21.0	6.0	22.0	32.0	22.0																																																																																				
12	21.0	6.0	22.0	32.0	22.0																																																																																				
14	24.0	6.0	25.0	35.0	25.0																																																																																				
16	29.0	6.0	30.0	40.0	30.0																																																																																				
18	29.0	6.0	30.0	40.0	30.0																																																																																				
20	32.0	6.0	33.0	43.0	33.0																																																																																				
22	36.0	6.0	37.0	47.0	37.0																																																																																				
24	36.0	6.0	37.0	47.0	37.0																																																																																				
26	39.0	6.0	40.0	50.0	40.0																																																																																				
E	<p>* Quantity : 2500 PCS/Reel/Catton</p>							E																																																																																	
F	<p>ROHS compliant</p>							F																																																																																	
G	<table border="1"> <thead> <tr> <th>Scale</th> <th>1:1</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>TOLERANCE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.X</td> <td>±X</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XX</td> <td>±X</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XXX</td> <td>±X</td> <td>③</td> <td>Delete inch</td> <td>18.12.2009</td> <td>Dean</td> <td></td> <td></td> </tr> <tr> <td>DIM</td> <td>TOL</td> <td>②</td> <td>Packing detail added</td> <td>06.05.2009</td> <td>Dean</td> <td></td> <td></td> </tr> <tr> <td>X.°</td> <td>±X°</td> <td>①</td> <td>Drawn</td> <td>18.08.2006</td> <td>Helwig</td> <td></td> <td></td> </tr> <tr> <td>Angle</td> <td>TOL</td> <td>Id.</td> <td>Modification</td> <td>Date</td> <td>Name</td> <td></td> <td></td> </tr> </tbody> </table>							Scale	1:1							TOLERANCE								.X	±X							.XX	±X							.XXX	±X	③	Delete inch	18.12.2009	Dean			DIM	TOL	②	Packing detail added	06.05.2009	Dean			X.°	±X°	①	Drawn	18.08.2006	Helwig			Angle	TOL	Id.	Modification	Date	Name			G																	
Scale	1:1																																																																																								
TOLERANCE																																																																																									
.X	±X																																																																																								
.XX	±X																																																																																								
.XXX	±X	③	Delete inch	18.12.2009	Dean																																																																																				
DIM	TOL	②	Packing detail added	06.05.2009	Dean																																																																																				
X.°	±X°	①	Drawn	18.08.2006	Helwig																																																																																				
Angle	TOL	Id.	Modification	Date	Name																																																																																				
H	1	2	3	4	5	6	7																																																																																		
	<table border="1"> <thead> <tr> <th>Customer-No.</th> <th>Date</th> <th>Name</th> <th>Customer-No.</th> <th>Replace</th> <th>SHEET</th> </tr> </thead> <tbody> <tr> <td></td> <td>18.08.2006</td> <td>Helwig</td> <td>ASSMANN WSW-No.</td> <td></td> <td>2 OF 2</td> </tr> <tr> <td></td> <td>18.12.2009</td> <td>Helwig</td> <td>A-30-XX-P1310</td> <td>ASS 2056 CO</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>A-30-XX-P131R</td> <td>rev03</td> <td></td> </tr> </tbody> </table>							Customer-No.	Date	Name	Customer-No.	Replace	SHEET		18.08.2006	Helwig	ASSMANN WSW-No.		2 OF 2		18.12.2009	Helwig	A-30-XX-P1310	ASS 2056 CO					A-30-XX-P131R	rev03		H																																																									
Customer-No.	Date	Name	Customer-No.	Replace	SHEET																																																																																				
	18.08.2006	Helwig	ASSMANN WSW-No.		2 OF 2																																																																																				
	18.12.2009	Helwig	A-30-XX-P1310	ASS 2056 CO																																																																																					
			A-30-XX-P131R	rev03																																																																																					
	<p>SW1487</p>																																																																																								