


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	JZ	ToH	26/11/2010



CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1460 Ohm/km max	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW - 1	UL 758

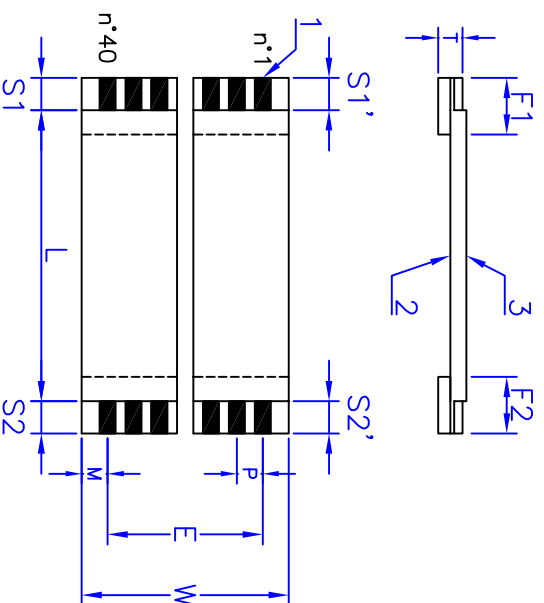

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS	
Number of conductors	-	40	
Pitch	MM	0,50 ± 0,05	P
Span	MM	19,50 ± 0,10	E
Total width	MM	20,50 ± 0,06	W
Margin	MM	0,50 +0,15/-0,096	M
Strip length	MM	4 ± 0,8	S1
Strip length	MM	4 ± 0,8	S2
End thickness	MM	0,30 ± 0,05	T
Insulated length	MM	36 ± 2	L
Reinforcement length	MM	7 ± 2	F1
Reinforcement length	MM	7 ± 2	F2
Strip difference S-S'	MM	0,30 max	

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	-	1
	Dimensions	MM	
Insulation	Material	-	2 3
	Thickness	MM	
Reinforcement tape	Material	-	4 5
	Thickness	MM	


UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.



AXON-CABLE SAS
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

CUSTOMER N°
FILE N°
008525.dwg

TITLE :
FFC0,50A40/0036S4,0-4,0-07,0-07,0FAU/AU



SIZE	AXON'SA N°	REV
A4	008525	A -
SCALE : N.D.		Prod. Doc.
		SHEET 1 of 1