
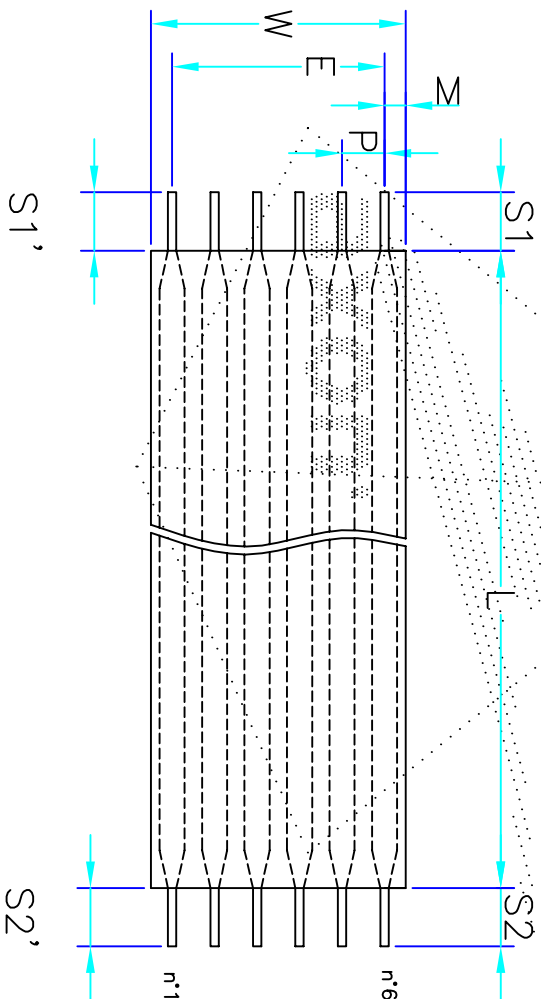


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	MIP	GT	01/03/11

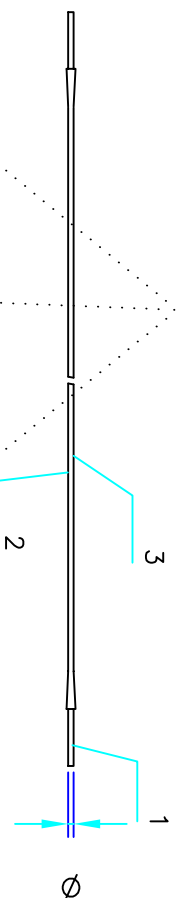

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS	
Number of conductors	-	6	P
Pitch	MM	2,54 ± 0,15	E
Span	MM	12,70 ± 0,20	W
Total width	MM	15,24 ± 0,15	M
Margin	MM	1,27 ± 0,20	S1
Strip length	MM	3,00 ± 1,00	S2
Strip length	MM	3,00 ± 1,00	L
Insulated length	MM	152,00 ± 4,00	
Strip difference S-S'	MM	0,40 max	

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	-	Tin plated copper (1,5 µm typ)	1
Conductor	MM	AWG 24 - 1,50X0,12 for flat part	
Insulation	-	Polyester+flame retardant adhesive insulation	2 3
Insulation	MM	0,100 mm nominal	

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	110 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	200 V DC
Dielectric test (conductor to conductor)	1 minute	500 V AC
Temperature rating	105 °C	-
Voltage rating	300 VDC maxi	-
Current rating	3,0 A maxi	-
Flame resistance	VW - 1	UL 758

PRELIMINARY DRAWING

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS : MM ANGLES : °

CUSTOMER N°
INELTRO


FILE N°
SU11120A.dwg



AXON CABLE SA
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

TITLE

RF02,54C06/0152H3,0-3,0-00,0-00,0SA--



SIZE A4
SCALE : N.D.
AXON'SA N°
SU11120

REV A
Prod. A
Doc. A
SHEET 1 of 1