

Finger - and
U-shaped
heatsinks

Attachables

Extruded
with solderpin

Extruded
standard length

CPU
heatsinks

Profiles




Retaining
springs

Mounting
accessories

Distance
spacers

Fans

Technical
explanation







Bestellcode
Ordercode

Option Option	Polzahl No. of poles	Dimension L (mm)	Wärmewiderstand Thermal resistance (K/W)
A	6 / 8	8,5	80
B	14 / 16	19	46
C	18	23	40

V 5618 x

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option

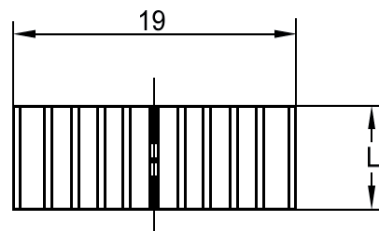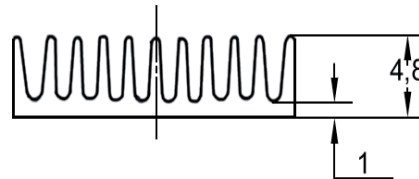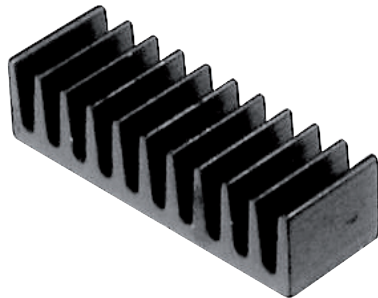

Bestellcode
Ordercode

Option Option	Polzahl No. of poles	Dimension L (mm)	Wärmewiderstand Thermal resistance (K/W)
A	14 / 16	6,3	48
B	24	33	13

V 5619 x

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option

Alle Typen werden in schwarz eloxierter Ausführung geliefert
All types will be delivered in black anodized finish