


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	JZ	***	15/03/2011

### CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	720 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW - 1	UL 758

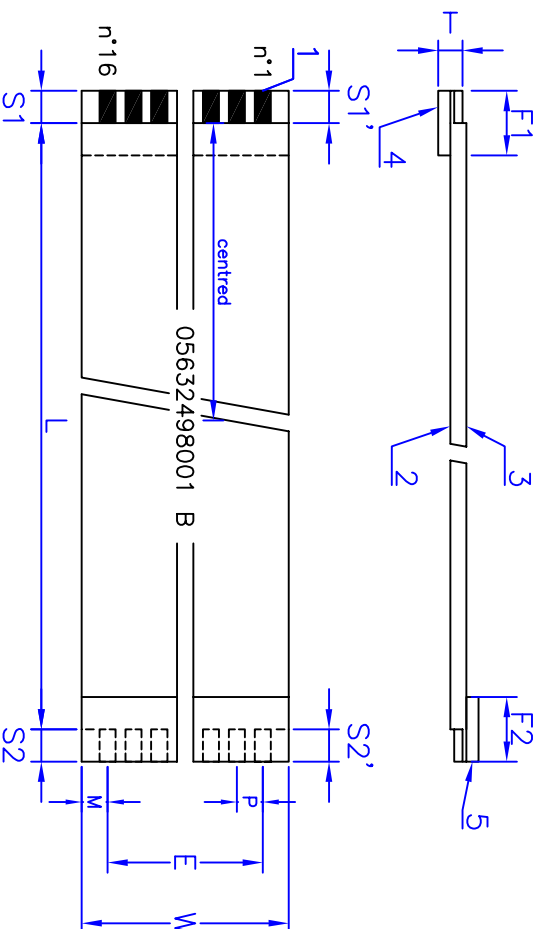

### DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	16
Pitch	MM	1,00 ± 0,10
Span	MM	15,00 ± 0,15
Total width	MM	17,00 ± 0,15
Margin	MM	1,00 ± 0,20
Strip length	MM	4 ± 1
Strip length	MM	4 ± 1
End thickness	MM	0,30 ± 0,05
Insulated length	MM	245 ± 5
Reinforcement length	MM	8 ± 2
Reinforcement length	MM	8 ± 2
Strip difference S-S'	MM	0,40 max

Ink jet marking on side itemized 3 : 05632498001 B		
Ink : Ink Jet Black	Height : 2,5 mm	Position : centred

### COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	Tin plated copper (2 µm typ)	1
	Dimensions	0,70x0,035 mm nominal	
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Thickness	0,043 mm nominal	
Reinforcement tape	Material	Red polyester	4 5
	Thickness	0,23 mm nominal	


UNLESS OTHERWISE SPECIFIED  
DIMENSIONS : MM ANGLES : d.



**AXON-CABLE SAS**  
51210 MONTMIRAIL - FRANCE  
TEL : +33 3 26 81 70 00  
FAX : +33 3 26 81 28 83  
www.axon-cable.com

Customer  
DRESSLER  
FILE N°  
SJ11138A.dwg

TITLE :  
FFC1,00D16/0245E4,0-4,0-08,0-08,0EARR/M



SIZE  
A4  
SCALE : N.D.

REV  
A A  
Prod. Doc.  
SHEET 1 of 1