


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	JZ	***	15/03/2011

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	280 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW - 1	UL 758

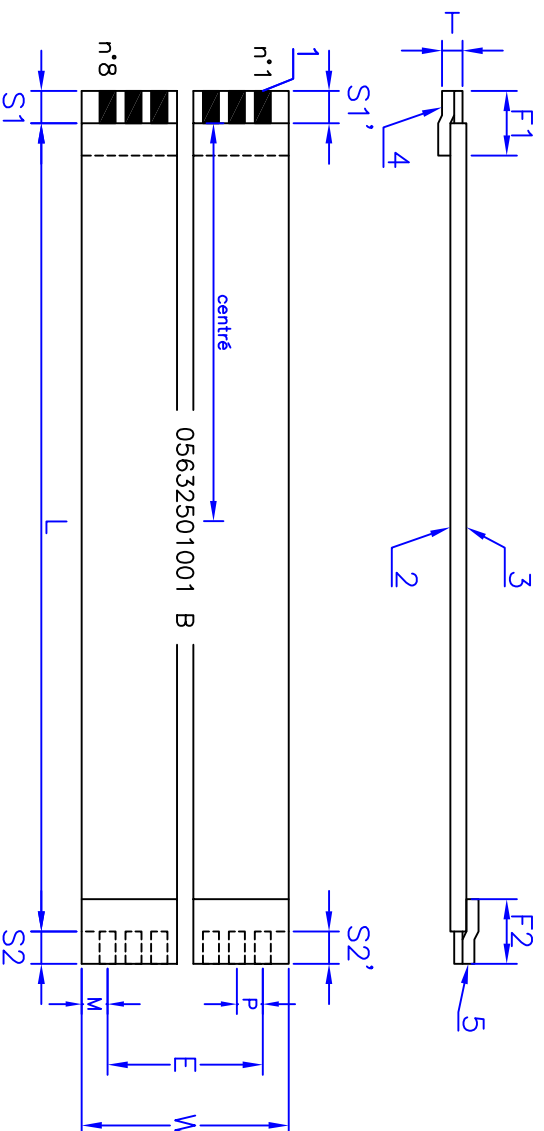

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	8
Pitch	MM	1,00 ± 0,08
Span	MM	7,00 ± 0,15
Total width	MM	9,00 ± 0,10
Margin	MM	1,00 ± 0,20
Strip length	MM	4 ± 0,8
Strip length	MM	4 ± 0,8
End thickness	MM	0,30 ± 0,05
Insulated length	MM	100 ± 3
Reinforcement length	MM	8 ± 2
Reinforcement length	MM	8 ± 2
Strip difference S-S'	MM	0,40 max

Ink jet marking on side itemized 3 : 05632501001 B		
Ink : Ink Jet Black	Height : 2,5 mm	Position : centred

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	Tin plated copper (2 µm typ)	1
	Dimensions	0,70x0,10 mm nominal	
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Thickness	0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Thickness	0,23 mm nominal	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.




AXON-CABLE SAS
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

Customer
DRESSLER

FILE N°
Sj11137A.dwg

TITLE :
FFC1,00D08/0100S4,0-4,0-08,0-08,0SABB/M



SIZE
A4

AXON'SA N°
Sj11137A

SCALE : ND.

REV	A	-
Prod.	Doc.	
SHEET 1 of 1		