

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F

F




G

G

H

H

Recommended PCB Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

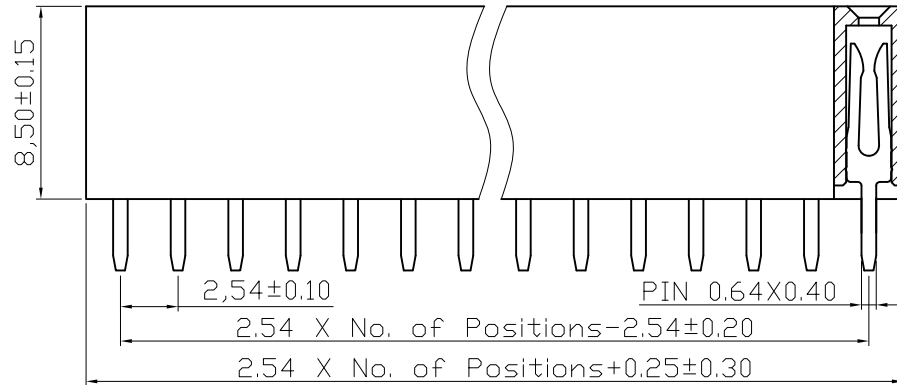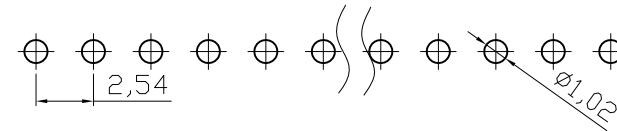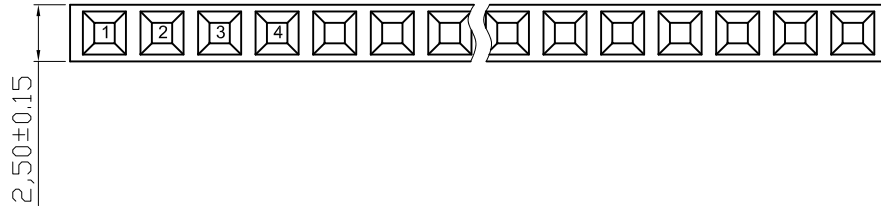

NOTES:

MATERIAL

- 1.Insulator Material:PBT+30%GF(UL94V-0)
- 2.Contact Material : Brass
- 3.Contact Plating : Gold Flash

ELECTRICAL

- 1.Current Rating : 3.0AMP
- 2.Withstand Voltage : 500V AC/DC
- 3.Contact Resistance : 20mΩ max
- 4.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1.Operation Temperature: -40°C to +105°C
- 2.Packing : Tray

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	18.09.2000	Hellwig	
X.X	±0.40					Approved	27.07.2009	Hellwig	ASSMANN WSW-No.
X.XX	±0.25								A-BL254-EG-GxxD
X.XXX	±0.15								Drawing-No.
DIM	TOL	②	Modify drawing	27.07.2009	Dean			ASS 1034A CO	rev02
Angle	±3°	①	Drawn	18.09.2000	Hellwig			Replace	SHEET
		Id.	Modification	Date	Name				

1

2

3

4

5

6

7

svxxx