
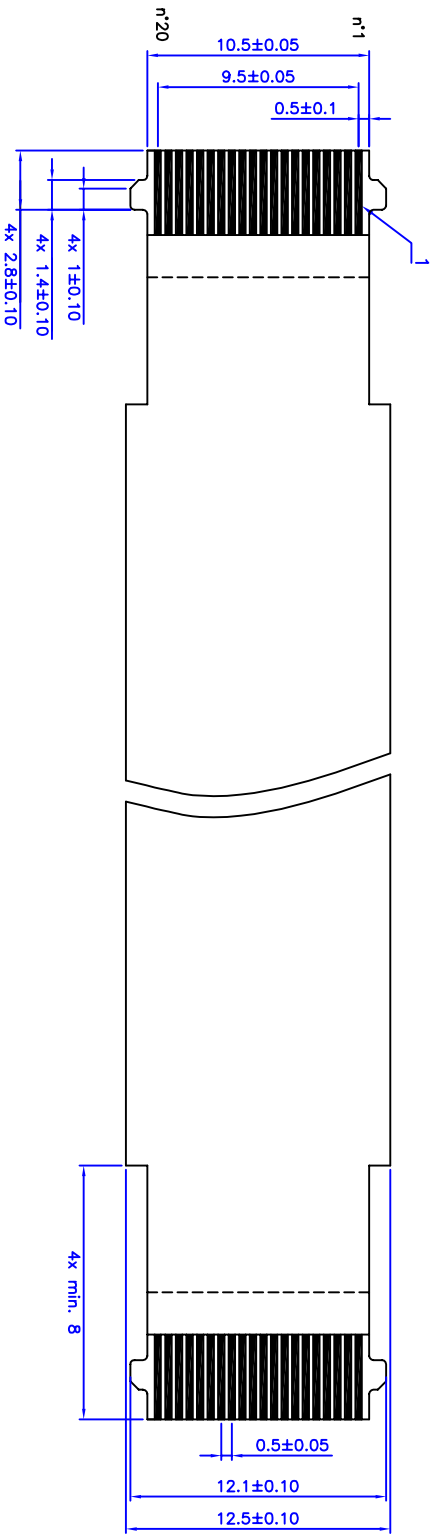


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	JZ	***	20/05/11

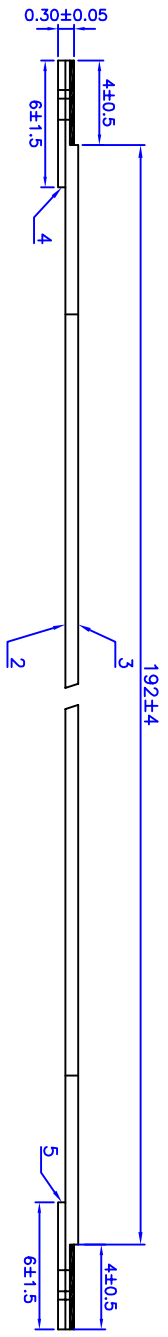


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	730 Ohm/km maxi	-
Insulation resistance (Conductor to conductor)	10 MOhm.m mini	500 V DC
Dielectric test (Conductor to conductor)	1 minute	200 V AC
Temperature rating	-40°C to 105°C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW-1	UL758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	-	Plating (min. 0,3µm Ni/min. 0,05µm Au)	1
Insulation	Material	MM 0,30 x 0,10 mm	2 3
	Dimensions	- Polyester+flame retardant adhesive insulation	
Reinforcement tape	Material	MM 0,086 mm nominal	4 5
	Dimensions	- Blue polyester 0,155 mm nominal	



AVX6288-shape

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °



AXON' KABEL GmbH
71229 LEONBERG
TEL : +49 7152 97992-0
FAX : +49 7152 97892-86
www.axon-cable.com

CUSTOMER N° INELTRO
FILE N° SJ11279A.dwg
TITLE
FFCO.50A20/0192S4.0-4.0-08.0-08.0SAKK/AU N spe 101

REV	A	A
Prod.		Doc.
SHEET 1 of 1		

SIZE A4
SCALE : N.D.
AXON' GmbH N°
SU11279