


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	TOH	***	18/07/2011



CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1460 Ohm/km max	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW - 1	UL 758

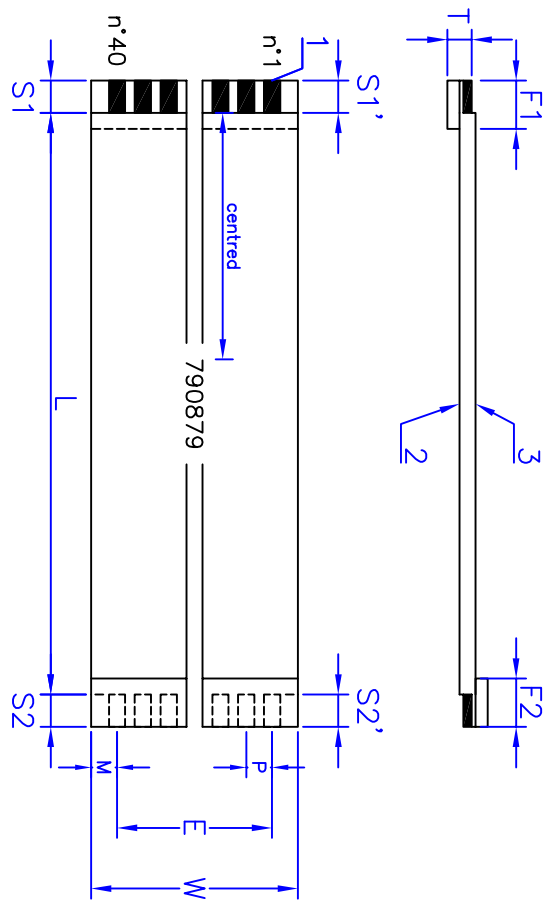

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	40
Pitch	MM	0,50 ± 0,05
Span	MM	19,50 ± 0,10
Total width	MM	20,50 ± 0,06
Margin	MM	0,50 +0,15/-0,096
Strip length	MM	4 ± 0,8
End thickness	MM	0,30 ± 0,05
Insulated length	MM	72 ± 3
Reinforcement length	MM	6 ± 2
Strip difference S-S'	MM	0,30 max

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	Golden contacts (0,3µm Ni/0,05µm Au min)	1
	Dimensions	0,30X0,05 mm nominal	
Insulation	Material	Polyester+flame retardant adhesive	2
	Thickness	0,086 mm nominal	3
Reinforcement type	Material	Blue polyester	4
	Thickness	0,180 mm nominal	5

Ink jet marking on side itemized 3 : 790879	Height : 2,5 mm	Position : centred
Ink : Ink Jet black		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : d.

AXON
CABLE & INTERCONNECTIQUE

AXON/CABLE SAS
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

FFC CAD 4.0/Janvier 2001/PrL-LM	TITLE :	FFC0,50D40/0072S4,0-4,0-06,0-06,0FAUJ/M/AU
CUSTOMER N° 790879	FILE N° SJ11411A.dwg	SIZE A4
		AXON'SA N° SJ11411

SCALE : N.D.	REV A Prod. Doc.	A A SHEET 1 of 1
--------------	------------------------	------------------------

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon'Cable