
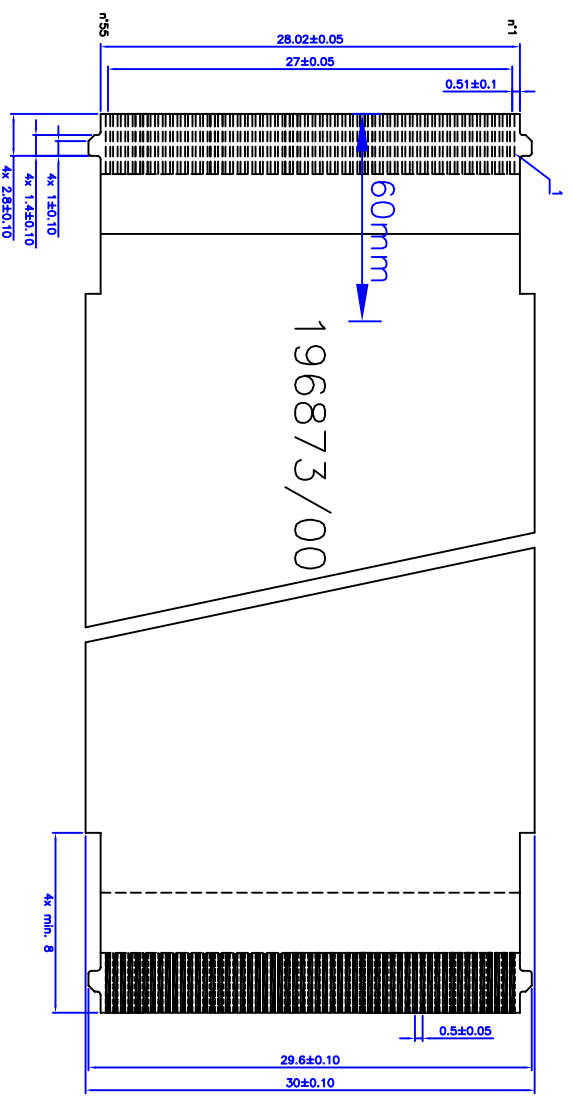


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	ToH	JZ	25/10/11
BA	marking added	ToH	JZ	27/10/11

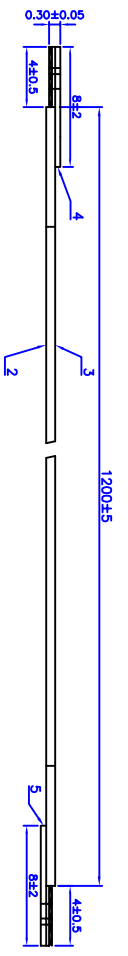


CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1460 Ohm/km maxi	-
Insulation resistance (Conductor to conductor)	10 MOhm.m mini	500 V DC
Dielectric test (Conductor to conductor)	1 minute	200 V AC
Temperature rating	-40°C to 105°C	-
Voltage rating	60 V AC maxi	-
Flame resistance	VW-1	UL758

COMPOSITION			
COMPONENTS	UNITS	SPECIFICATIONS	ITEM
Conductor	Material	Plating (min. 0,5µm Ni/min. 0,05µm Au)	1
	Dimensions	0,30 x 0,05 mm	
Insulation	Material	Polyester+flame retardant adhesive insulation	2 3
	Dimensions	0,086 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Dimensions	0,180 mm nominal	

Ink jet marking on side itemized 2 and 3 : 196873/00
 Ink : Ink Jet black Height : 2,5 mm Position : centred
 Position : 60mm from the cable end with the reinforcement (both sides)

-Camera checking



AVX6288-shape

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : °

CUSTOMER N° 196873/00
 FILE N° SJ11579B.dwg
 TITLE FFC0.50D55/1200S4.0-4.0-08.0-08.0FAU/AU M N spe tol

AXON KABEL GmbH N°

AXON' KABEL GmbH
 71229 LEONBERG
 TEL. : +49 7152 97992-0
 FAX : +49 7152 97882-86
 www.axon-cable.com

SCALE : N.D.

SIZE A4

REV. B Prod. A
 SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon'Cable