


High Performance IEC Inlet Filter

SCHAFFNER
energy efficiency and reliability



- Rated currents up to 15A
- Excellent attenuation performance
- Optional medical versions (B type) according to IEC/EN 60601-1
- Snap-in versions (S and S1 type)
- Hot inlet versions (HI type)

Approvals




Technical specifications


Maximum continuous operating voltage:	250VAC, 50/60Hz
Operating frequency:	dc to 400Hz
Rated currents:	1 to 15A @ 50°C
Approvals by rated current:	1 to 10A (ENEC, CQC) 1 to 15A (UL, CSA)
High potential test voltage:	P → PE 2000VAC for 2 sec (standard types) P → PE 2500VAC for 2 sec (B types) P → N 1000VAC for 2 sec
Protection category:	IP40 according to IEC 60529
Temperature range (operation and storage):	-25°C to +85°C (25/85/21)
Design corresponding to:	UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939
Flammability corresponding to:	UL 94V-2 or better
MTBF @ 40°C/230V (Mil-HB-217F):	2,540,000 hours

Typical electrical schematic

Standard, R and B types

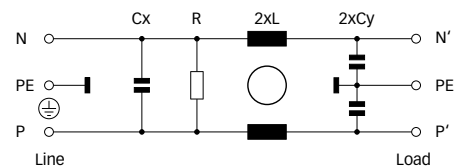

F2 types

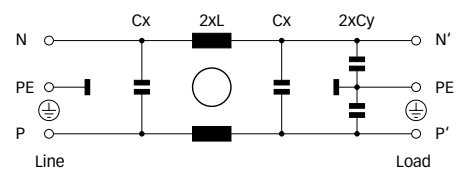

The FN 9233 IEC inlet filter combines an excellent IEC inlet and mains filter with excellent filter attenuation in a small form factor. Choosing the FN 9233 product line brings you the rapid availability of a standard filter associated with the necessary safety acceptances. Standard IEC connector filters are a practical solution helping you to pass EMI system approval in a short time. A wide selection on amperage ratings, output connections, mounting possibilities and filters for medical applications are designed to offer you the desired solution. For types with additional earth line choke please consult the FN 9233E data sheet.


Features and benefits

- Exceptional conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior.
- Rear/front or snap-in mounting.
- Optional earth line choke see FN 9233E data sheet.
- Optional medical versions (B type) comply with the requirements of IEC/EN 60601-1 for creepage and clearance, leakage current and high potential testing.
- Wide mounting flanges available.
- Different output connections offering maximum flexibility for assembly.
- Custom-specific versions are available on request.

Typical applications

- Portable electrical and electronic equipment
- Small to medium-sized machines and household equipment
- Single-phase power supplies, switch-mode power supplies
- Test and measurement equipment
- Medical equipment
- Rack mounting equipment


Filter selection table

Filter	Rated current @ 50°C (25°C)	Leakage current* @ 250VAC/50Hz	Inductance L	Capacitance			Resistance R	Output connections	Weight
	[A]	[µA]	[mH]	Cx1 [µF]	Cx2 [µF]	Cy [nF]	[kΩ]	 -06	[g]
FN 9233x-1-06	1 (1.2)	373	22.5	0.1		2.2		-06	37
FN 9233x-3-06	3 (3.5)	373	4.6	0.1		2.2		-06	37
FN 9233x-6-06	6 (7.2)	373	1.6	0.1		2.2		-06	37
FN 9233x-8-06	8 (10.6)	373	0.9	0.1		2.2		-06	37
FN 9233x-10-06	10 (11.6)	373	0.45	0.1		2.2		-06	37
FN 9233x-12-06	12 (12)	373	0.27	0.1		2.2		-06	37
FN 9233x-15-06	15 (15)	373	0.2	0.1		2.2		-06	37
FN 9233x-12-06HI	12 (12)	373	0.27	0.1		2.2		-06	37
FN 9233x-15-06HI	15 (15)	373	0.2	0.1		2.2		-06	37
FN 9233xR-1-06	1 (1.2)	373	22.5	0.1		2.2	1000	-06	37
FN 9233xR-3-06	3 (3.5)	373	4.6	0.1		2.2	1000	-06	37
FN 9233xR-6-06	6 (7.2)	373	1.6	0.1		2.2	1000	-06	37
FN 9233xR-8-06	8 (10.6)	373	0.9	0.1		2.2	1000	-06	37
FN 9233xR-10-06	10 (11.6)	373	0.45	0.1		2.2	1000	-06	37
FN 9233xR-12-06	12 (12)	373	0.27	0.1		2.2	1000	-06	37
FN 9233xR-15-06	15 (15)	373	0.2	0.1		2.2	1000	-06	37
FN 9233xR-12-06HI	12 (12)	373	0.27	0.1		2.2	1000	-06	37
FN 9233xR-15-06HI	15 (15)	373	0.2	0.1		2.2	1000	-06	37
FN 9233xB-1-06	1 (1.2)	2	22.5	0.1			1000	-06	37
FN 9233xB-3-06	3 (3.5)	2	4.6	0.1			1000	-06	37
FN 9233xB-6-06	6 (7.2)	2	1.6	0.1			1000	-06	37
FN 9233xB-8-06	8 (10.6)	2	0.9	0.1			1000	-06	37
FN 9233xB-10-06	10 (11.6)	2	0.45	0.1			1000	-06	37
FN 9233xB-12-06	12 (12)	2	0.27	0.1			1000	-06	37
FN 9233xB-15-06	15 (15)	2	0.2	0.1			1000	-06	37
FN 9233xB-12-06HI	12 (12)	2	0.27	0.1			1000	-06	37
FN 9233xB-15-06HI	15 (15)	2	0.2	0.1			1000	-06	37
FN 9233UF2-1-06	1 (1.2)	560	22.5	0.047	0.047	3.3		-06	46
FN 9233UF2-3-06	3 (3.5)	560	4.6	0.047	0.047	3.3		-06	46
FN 9233UF2-6-06	6 (7.2)	560	1.6	0.047	0.047	3.3		-06	46
FN 9233UF2-8-06	8 (10.6)	560	0.9	0.047	0.047	3.3		-06	46
FN 9233UF2-10-06	10 (11.6)	560	0.45	0.047	0.047	3.3		-06	46
FN 9233UF2-12-06	12 (12)	560	0.27	0.047	0.047	3.3		-06	46
FN 9233UF2-15-06	15 (15)	560	0.2	0.047	0.047	3.3		-06	46

* Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

Product selector

FN 9233xx-yy-..HI-zz



Snap-in range for S version only

Blank: Snap-in range 0.7 to 1.5mm

20: Snap-in range 1.5 to 2.2mm

Blank: Standard IEC inlet type C14

HI: Hot IEC inlet type C16 (12 and 15A types only)

06: Faston 6.3 x 0.8mm (spade/soldering)





1 to 15: Rated current

Blank: Standard version

R: Bleed resistor

B: Medical version (with bleed resistor and without Y2-capacitor)

F2: 2 X-capacitors and higher Y-capacitor value


-  Blank: Standard housing with mounting flanges
-  U: Housing with wider mounting flanges
-  S: Snap-in version, snapper on vertical side
-  S1: Snap-in version, snapper on horizontal side

For example: FN 9233-15-06, FN 9233S1B-10-06-20, FN 9233R-12-06HI


Typical filter attenuation

Per CISPR 17; A = 50Ω/50Ω sym; B = 50Ω/50Ω asym; C = 0.1Ω/100Ω sym; D = 100Ω/0.1Ω sym


FN 9233: 1 and 3A types




FN 9233: 6 to 10A types




FN 9233: 12 and 15A types




FN 9233UF2: 1 and 3A types



FN 9233UF2: 6 to 10A types




FN 9233UF2: 12 and 15A types




Mechanical data


FN 9233

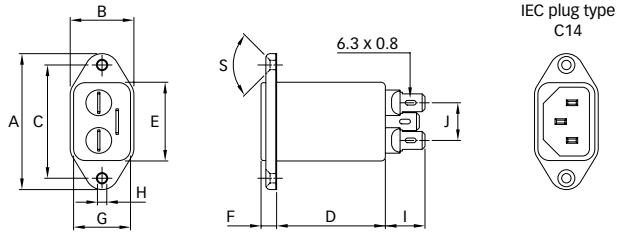


FN 9233-HI

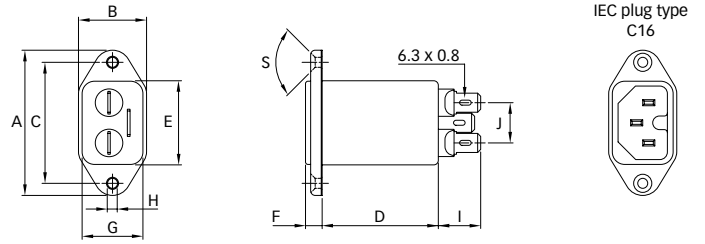


FN 9233S

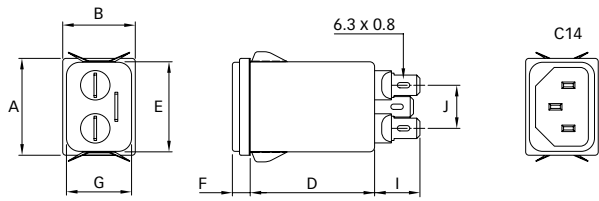


FN 9233S1

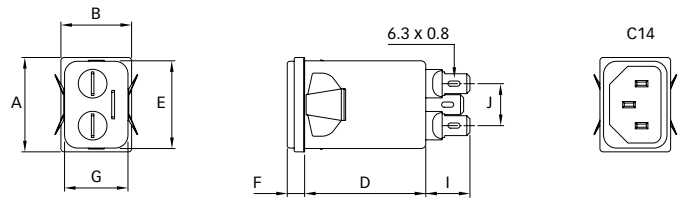


FN 9233U

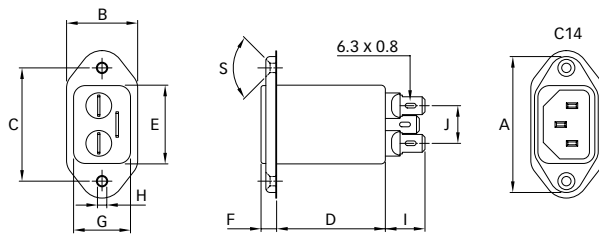

Installation

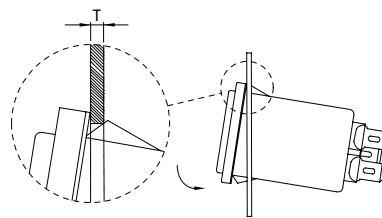

Panel cut out



Dimensions

	FN 9233	FN 9233U	FN 9233UF2	FN 9233S	FN 9233S1	FN 9233-HI
A	48	51.85	51.85	29.9	29.9	48
B	22.5	25	25	22.4	22.4	22.5
C	40 ±0.2	40 ±0.2	40 ±0.2			40 ±0.2
D	38.4	38.25	46.8	38.4	38.4	38.4
E	27.8	27.8	27.8	27.8	27.8	27.8
F	5.5	5.5	5.5	5.5	5.5	5.5
G	20.1	20.1	20.1	20.1	20.1	20.1
H	Ø3.3	Ø3.3	Ø3.3			Ø3.3
I	14	14.1	14	14	14	14
J	13.3	13.3	13.3	13.3	13.3	13.3
M	R ≤ 3	R ≤ 3	R ≤ 3	R ≤ 1.5	R ≤ 1.5	R ≤ 3
N	21.5	21.5	21.5	20.8	21.9	21.5
P	28.5	28.5	28.5	29.4	28.5	28.5
R	M3	M3	M3			M3
S	90°	90°	90°			90°
T*				0.7 - 1.5	0.7 - 1.5	
T*				1.5 - 2.2	1.5 - 2.2	

* For selecting the panel thickness, please refer to the filter selector table.

All dimensions in mm; 1 inch = 25.4mm

Tolerances according: ISO 2768-m / EN 22768-m

**Headquarters and
global innovation and
development center**

Schaffner Group
Nordstrasse 11
4542 Luterbach
Switzerland
T +41 32 681 66 26
F +41 32 681 66 30
info@schaffner.ch
www.schaffner.com

Sales and application centers

China
Schaffner EMC Ltd. Shanghai
Building 11, Lane 1365
East Kangqiao Road
Shanghai 201319
T +86 21 6813 9855
F +86 21 6813 9811
cschina@schaffner.com
www.schaffner.com

Germany
Schaffner Deutschland GmbH
Schoemperlenstrasse 12B
76185 Karlsruhe
T +49 721 56910
F +49 721 569110
germanysales@schaffner.com

Finland
Schaffner Oy
Tynninkuja 7
08700 Lohja
T +358 19 35 72 71
F +358 19 32 66 10
finlandsales@schaffner.com

France
Schaffner EMC S.A.S.
112, Quai de Bezons
95103 Argenteuil
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Italy
Schaffner EMC S.r.l.
Via Galileo Galilei, 47
20092 Cinisello Balsamo (MI)
T +39 02 66 04 30 45/47
F +39 02 61 23 943
italysales@schaffner.com

Japan
Schaffner EMC K.K.
Mitsui-Seimei Sangenjaya Bldg. 7F
1-32-12, Kamiyama, Setagaya-ku
Tokyo 154-0011
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
www.schaffner.jp

Sweden
Schaffner EMC AB
Turebergstorg 1, 6
19147 Sollentuna
T +46 8 5792 1121/22
F +46 8 92 96 90
swedensales@schaffner.com

Switzerland
Schaffner EMV AG
Nordstrasse 11
4542 Luterbach
T +41 32 681 66 26
F +41 32 681 66 41
sales@schaffner.ch

Singapore
Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1
05-09 Kampong Ubi Industrial
Estate
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain
Schaffner EMC España
Calle Caléndula 93,
Miniparc III, Edificio E
El Soto de la Moraleja,
Alcobendas
28109 Madrid
T +34 618 176 133
spainsales@schaffner.com

Taiwan
Schaffner EMV Ltd.
6th Floor, No 413
Rui Guang Road
Neihu District
Taipei City 114
T +886 2 87525050
F +886 2 87518086
taiwansales@schaffner.com

Thailand
Schaffner EMC Co. Ltd.
Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang
Amphur Muang P.O. Box 14
Lamphun 51000
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

UK
Schaffner Ltd.
5 Ashville Way
Molly Millars Lane
Wokingham
Berkshire RG41 2PL
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com
www.schaffner.uk.com

USA
Schaffner EMC Inc.
52 Mayfield Avenue
Edison, New Jersey 08837
T +1 732 225 9533
F +1 732 225 4789
usasales@schaffner.com
www.schaffner.com/us

To find your local partner within
Schaffner's global network, please go to

www.schaffner.com

May 2011

© 2011 Schaffner EMC.
Specifications subject to change without
notice. All trademarks recognized.

Schaffner is an ISO-registered company.
Its products are designed and manufac-
tured under the strict quality and environ-
mental requirements of the ISO 9001 and
ISO 14001 standards.

This document has been carefully
checked. However, Schaffner does not
assume any liability for errors or inac-
curacies.