

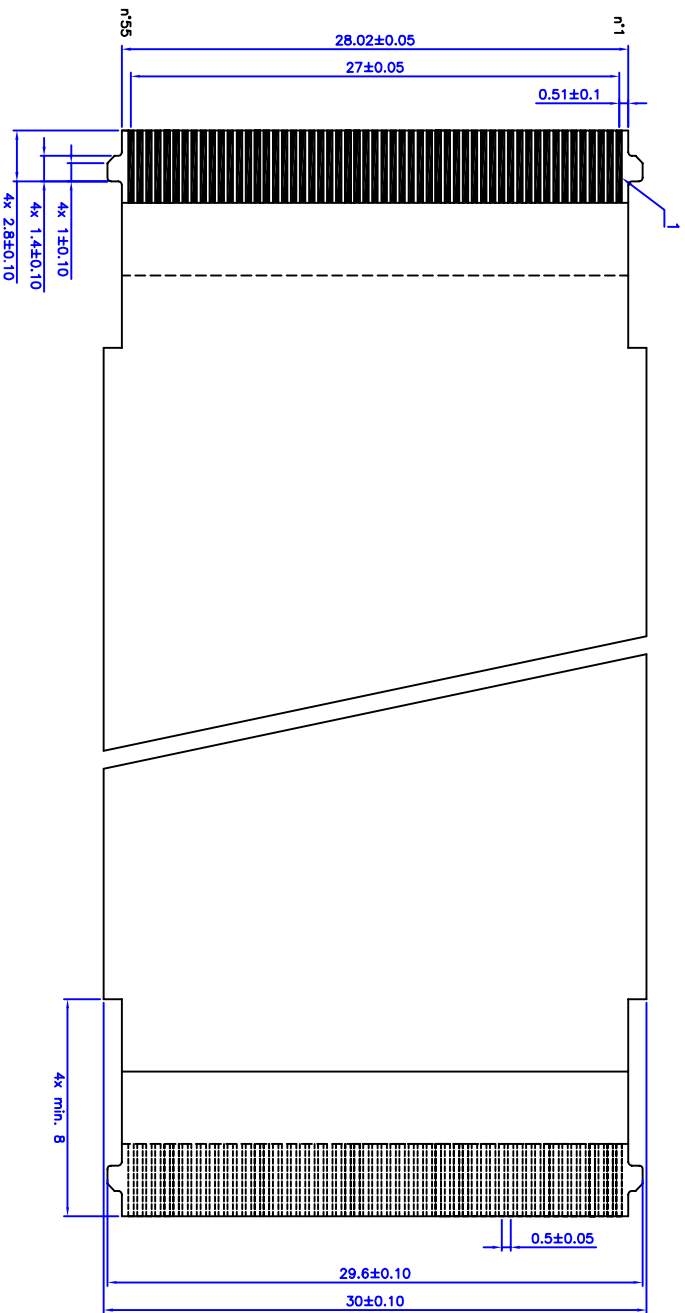


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DD/MM/YY
AA	Creation	ToH	JZ	11/10/12

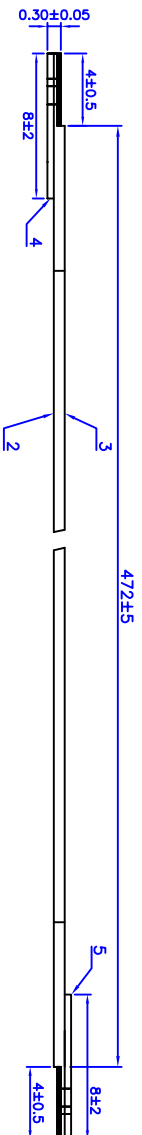

AVX6288—shape

Camera checking

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1730 Ohm/km max	—
Conductor to conductor insulation resistance	10 MOhm.m min	500 V DC
Dielectric test (conductor to conductor)	1 minute	200 V AC
Temperature rating	105 °C	—
Voltage rating	60 V AC max	—
Flame resistance	VW — 1	UL 758

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	MM	Tin plated copper (2 µm typ)	1
Insulation	Material	0,30x0,035 mm nominal	2 3
	Thickness	Polyester+flame retardant adhesive insulation	
Reinforcement tape	Material	0,043 mm nominal	4 5
	Thickness	Blue polyester	
	Thickness	0,226 mm nominal	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °


axon'
 KABEL & VERBINDUNGSSYSTEME
 AXON' KABEL GmbH
 71229 LEONBERG
 TEL. : +49 7152 97992-0
 FAX : +49 7152 97882-86
 www.axon-cable.com

CUSTOMER N°	TITLE
FILE N° SJ12472A.dwg	FFCO.50D55/0472E4.0-4.0-08.0-08.0EABB/N spe tol (AVX6288)
SIZE A4	AXON' GmbH N°
SCALE : N/D.	SJ12472
REV. A	Prod. A
SHEET 1 of 1	Doc.

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon'Cable