


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	JZ	TOH	30/10/12

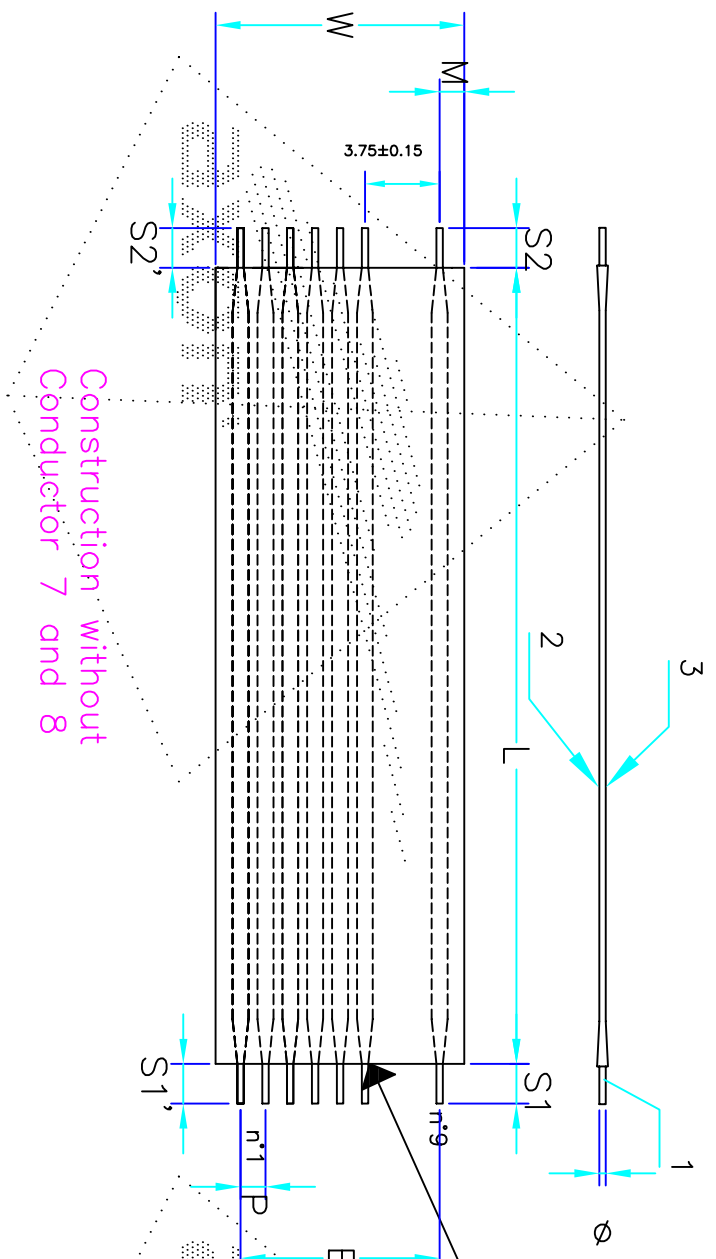

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	250 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	200 V DC
Dielectric test (conductor to conductor)	1 minute	500 V AC
Temperature rating	125 °C	-
Voltage rating	200 V AC maxi	-
Current rating	1,5 A maxi	-
Flame resistance	VW - 1	UL 758

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	9
Pitch	MM	1,25 ± 0,15
Span	MM	10 ± 0,20
Total width	MM	12,5 ± 0,15
Margin	MM	1,25 ± 0,20
Strip length	MM	2,50 ± 1,00
Strip length	MM	2,50 ± 1,00
Insulated length	MM	20,00 ± 2,00
Strip difference S-S'	MM	0,40 max

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	-	Tin plated copper (1,5 µm typ)	1
Insulation	Material	MM AWG 28 - 0.80X0.10 for flat part	2 3
	Thickness	Polimide+ adhesive insulation 0,075 mm nominal	

PRELIMINARY DRAWING

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS : MM ANGLES : d.

AXON' CABLE SA
51210 MONTMIRAIL - FRANCE
TEL : +33 3 26 81 70 00
FAX : +33 3 26 81 28 83
www.axon-cable.com

CUSTOMER N° Ineltra
TITLE
FILE N° SJ12492A.dwg
RFC1.25C09/0020X2.5-2.5-0.0-0.0SA--/- 2 cond special

SIZE A4
SCALE : N.D.

AXON' N° SJ12492

REV A
Prod. Doc.
SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon' Cable