
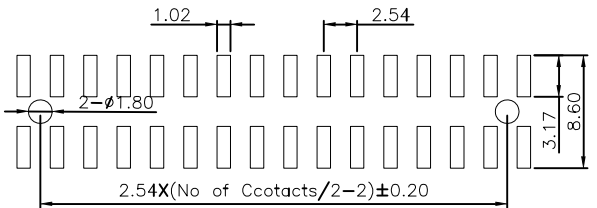
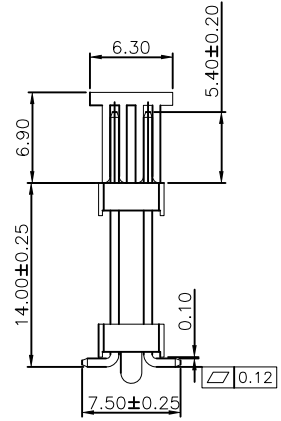
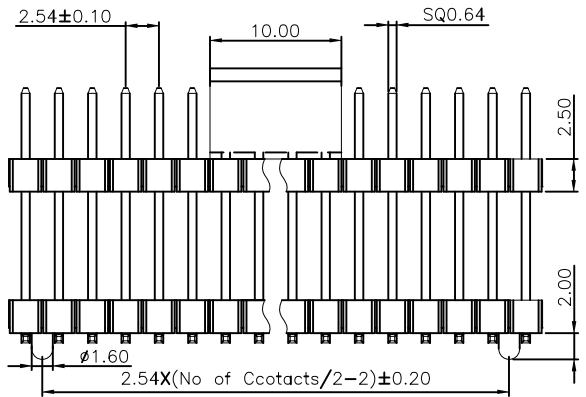


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

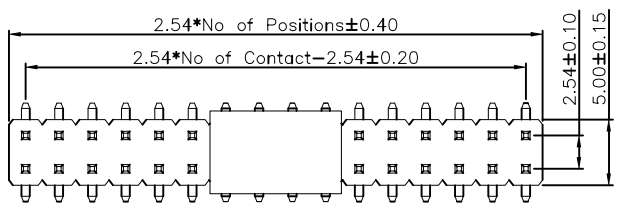

P.C.B LAYOUT

Technical Data

Material:
 Contact Material: Brass
 Contact plating: 1U" AU over Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: PA-6T+30%G.F


Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 1000V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: Gold Plated: -55° C to +105° C
 Soldering temperature: +260° C, 10s max.

② Packing: Tupe + Cap

RoHS compliant

Unit:mm

Scale	1:1					Date	Name	Customer-No.
TOLERANCE						Drawn	26.10.2010	Rale
X.	±0.5					Approved	13.03.2013	Joanna
.X	±0.3							
.XX	±0.2	②	change factory ; change p/n	13.03.2013	Joanna			
DIM	TOL	①	Change P/N	10.12.2010	Schulz			
X.°		①	Drawn	26.10.2010	Rale			
Angle	TOL	Id.	Modification	Date	Name	Replace		Sheet

ASSMANN WSW-No.	
②	ADB-254-XX-ST3
Drawing-No.	
ASS 4309 CO	rev02
Replace	Sheet