


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	AC	***	14/04/00
BA	Insulation type	AC	B&C	22/04/03

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	100 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	1500 V AC
Temperature rating	-30°C/105°C	-
Voltage rating	300 V AC maxi	-
Flame resistance	VW - 1	UL 758

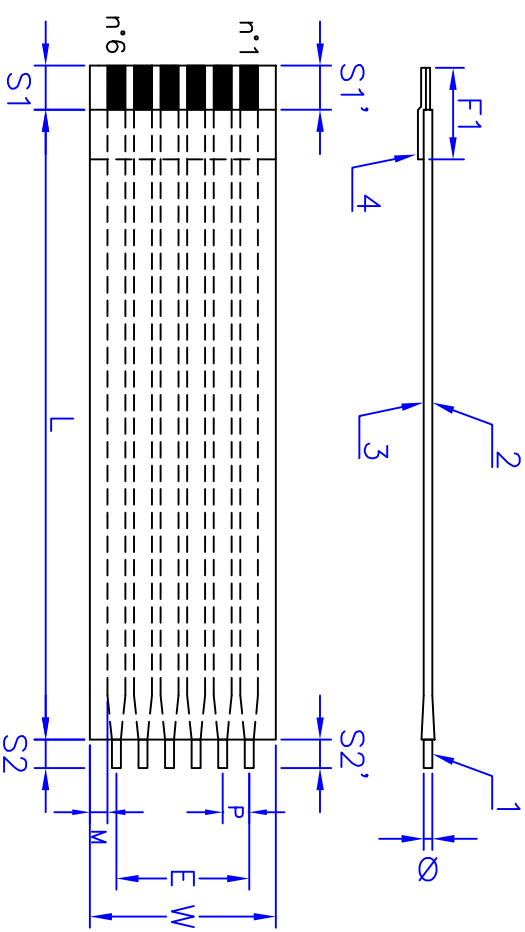

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	06
Pitch	MM	2,54 ± 0,20
Span	MM	12,70 ± 0,20
Total width	MM	17,78 ± 0,20
Margin	MM	1,79 ± 0,20
Strip length	MM	6 ± 1
Strip length	MM	3,2 ± 1
Reinforcement length	MM	10 ± 2
Diameter round conductor	MM	0,50 ± 0,05
Insulated length	MM	1,35 ± 4
Strip difference S-S'	MM	0,40 max

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	Tin plated copper (2 µm typ)	1
	Dimensions	AWG 24 either 1,50x0,12 nom. for flat conductor	
Insulation	Material	Polyester+adhésif retardant la flamme	2 3
	Thickness	0,10 mm nominal	
Reinforcement Type	Material	Blue polyester	4
	Thickness	0,23 mm nominal	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °



AXON' KABEL GmbH
 POSTFACH 1131 - D-71201 LEONBERG
 HERTICHSTR. 10 - D-71229 LEONBERG
 TEL : +49 7152 9792-0
 FAX : +49 7152 9792-7
 E-Mail : sales@axon-cable.de

RFC_CAD 1.0/Juin 2001/FRL	TITLE :	RFC2,54B06/0135H6.0-3.2-10.0-00.OSAB-
CUSTOMER N°	FILE N°	SJ00135B.dwg
SIZE	AXON'SA N°	SJ00135
A4	SCALE : ND.	
REV	Prod. Doc.	B A
SHEET 1 of 1		

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon' Cable