

Transparence PVC  
(透明 PVC)

Cell电芯: CR14335BL EEMB  
PVC

Connected  
Nickel strip  
(连接镍带)


Heatshrink tube

Heatshrink tube  
(热缩管)

Wire引线(-): Black黑 UL1007 AWG26

Wire引线(+): Red红, UL1007 AWG26

Connector插头: JST PHR-02







Remark:

1. Pack :3.0V 1100mAh, With wires and connector, Transparent PVC  
(Fix lead wire by erect PVC tube and then cover the whole battery with horizontal PVC tube, with date code.)

电池: 3.0V 1100mAh. 带输出引线及插头. 包透明PVC  
(先用竖套PVC固定引线. 再用横套PVC将整体包住. 表面喷码)

2. RoHS Compliant  
严格按照RoHS要求生产

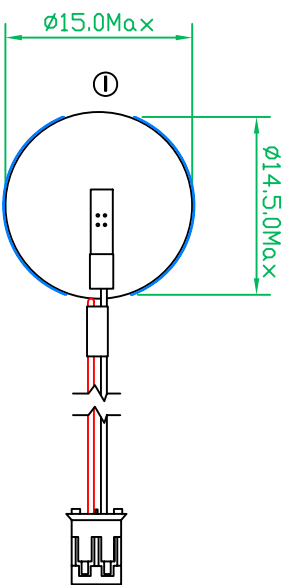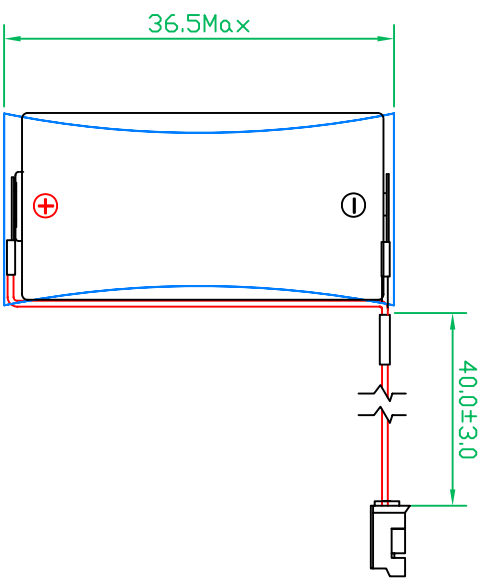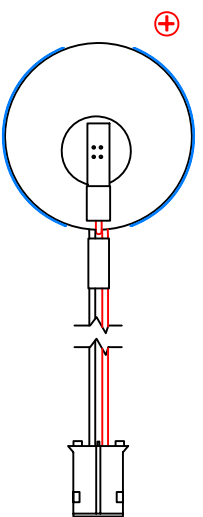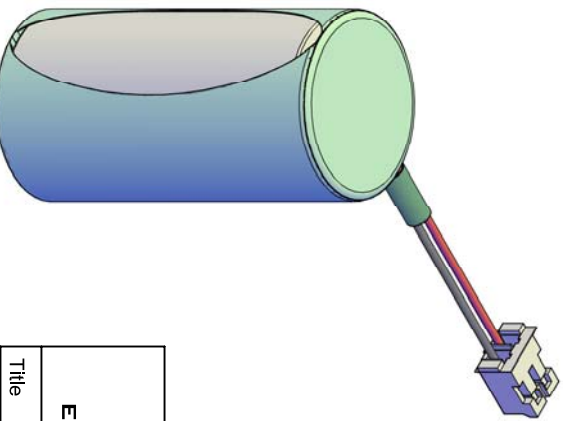

		Drawn:	zhuhaoran	Projection:	
		Checked 1:	Rachel	Page:	1/1
Title		Checked 2:		Scale:	1.5 : 1
File NO.		Approved:		Unit:	mm
A08466		Draw Date:	2013/08/21	Version No:	E3-2005