


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	TOH	***	31/08/2010

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	280 Ohm/km maxi	-
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	80 °C maxi	-
Voltage rating	30 V AC maxi	-
Flame resistance	VW - 1	UL 758

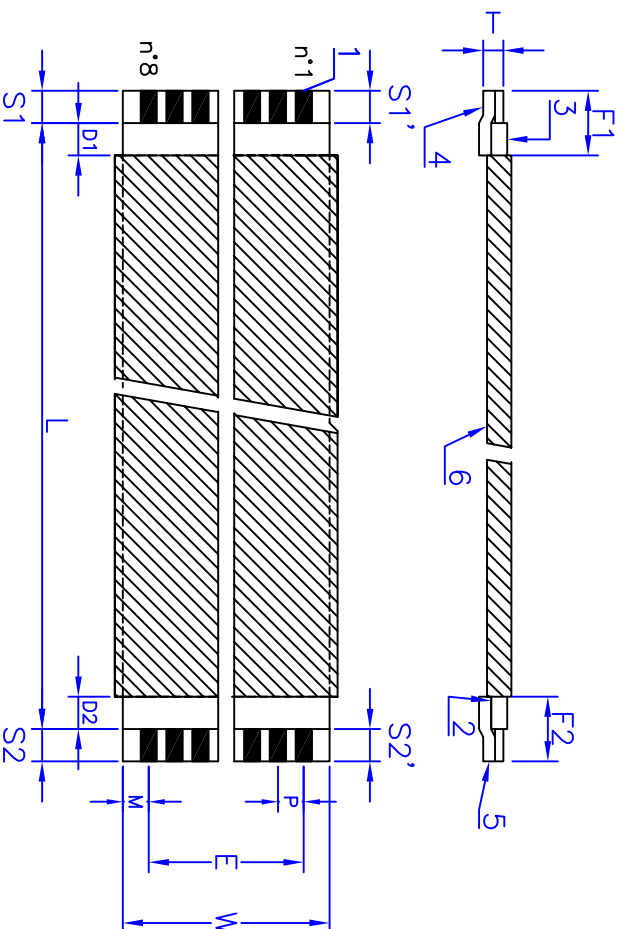


DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	-	8
Pitch	MM	1,00 ± 0,08
Span	MM	7,00 ± 0,15
Total width	MM	9,00 ± 0,10
Margin	MM	1,00 ± 0,20
Strip length	MM	4 ± 0,8
Strip length	MM	4 ± 0,8
End thickness	MM	0,30 ± 0,05
Insulated length	MM	292 ± 5
Reinforcement length	MM	8 ± 2
Strip difference S-S'	MM	0,40 max
Shield position	MM	4 ± 3
Shield position	MM	4 ± 3

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	Tin plated copper (2 µm typ)	1
	Dimensions	0,70x0,10 mm nominal	
Insulation	Material	Polyester+flame retardant adhesive	2 3
	Thickness	0,115 mm nominal	
Reinforcement tape	Material	Blue polyester	4 5
	Thickness	0,23 mm nominal	
Aluminum Tape	Material	Polyester film/Adhesive/Aluminium/Adhesive	6
	Thickness	0,03 mm nominal	


UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : °


axon'
 KABEL & VERBINDUNGSSYSTEME
AXON' KABEL GmbH
 71229 LEONBERG
 TEL : +49 7152 97992-0
 FAX : +49 7152 97882-86
 www.axon-cable.com

CUSTOMER N°
Cedes 109938

FILE N°
008188A.dwg

TITLE :
FFC1.00A08/0292L4.0-4.0-08.0-08.0SABB/S



SIZE
A4

AXON'SA N°
008188

REV
A A
Prod. Doc.
SHEET 1 of 1

This drawing is the property of Axon', and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Axon'Cable