


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	ToH	***	15/08/2011
BA	spe tol for F1/F2 and S1/S2	ToH	***	21/09/2011
CA	design B/SAKK	JZ	ToH	30/04/2014

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	280 Ohm/km maxi	—
Conductor to conductor insulation resistance	10 MOhm.m mini	400 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C maxi	—
Voltage rating	60 V AC maxi	—
Flame resistance	VW — 1	UL 758

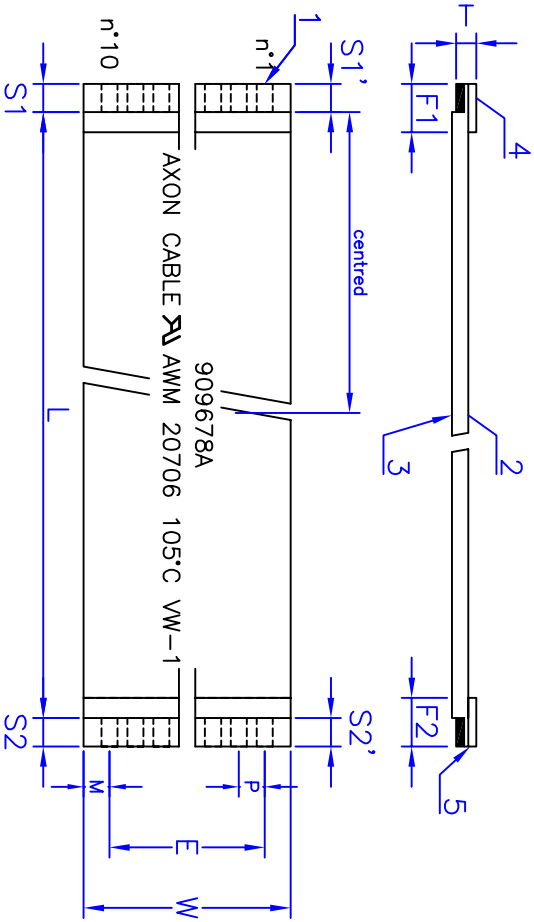

INFO: Packaging: 20 pcs per ESD ZIP-bag

DIMENSIONS

ITEMS	UNITS	SPECIFICATIONS
Number of conductors	—	10
Pitch	MM	1,00 ± 0,08
Span	MM	9,00 ± 0,15
Total width	MM	11,00 ± 0,10
Margin	MM	1,00 ± 0,20
Strip length	MM	3,5 ± 0,5
Strip length	MM	3,5 ± 0,5
End thickness	MM	0,30 ± 0,05
Insulated length	MM	113 ± 4
Reinforcement length	MM	6 ± 1,5
Reinforcement length	MM	6 ± 1,5
Strip difference S-S'	MM	0,40 max

Ink jet marking on side itemized 2 :	909678A
AXON CABLE AWM 20706 105°C VW-1	
Ink : Ink Jet black	Height : 2,5 mm
	Position : centred

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	Material	—	—
	Dimensions	MM	0,70x0,10 mm nominal
Insulation	Material	—	Polyester+flame retardant adhesive insulation
	Thickness	MM	0,073 mm nominal
Reinforcement	Material	—	Blue polyester
	Thickness	MM	0,155 mm nominal

UNLESS OTHERWISE SPECIFIED DIMENSIONS : MM ANGLES : d.		 axon' CABLE & INTERCONNECTIQUE		AXON'CABLE SAS 51210 MONTMIRAIL - FRANCE TEL : +33 3 26 81 70 00 FAX : +33 3 26 81 28 83 www.axon-cable.com	
FFC CAD 4.0/Janvier 2001/FIL-LM	CUSTOMER N°	TITLE :			
909678A	FILE N°	FFC1.00A10/0113B3.5-3.5-06.0-06.0SAKK/M spe packaging spe tol			
SJ11476C.dwg	SIZE	AXON'SA N°	REV		
	A4	SJ11476	C	A	
SCALE : N.D.	SHEET 1 of 1				