


Model: LP553436		Overcharge Detection Voltage(V)	4.28±0.05
Min.Capacity 最低容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)		Overdischarge Detection Voltage(V)	3.0±0.1
580		过放保护电压 (V)	
Typical Capacity 典型容量 (mAh) (0.2C, 25±3°C) *Single cell capacity (单体电芯容量)		Limited to Max loading current 仅用于最大的负载电流 peak value (A) 峰值 2.2 (A)	constant (A) 持续 1.0 (A)
630		Customer required Max loading current 客户要求最大的负载电流 peak value (A) 峰值 2.2 (A)	constant (A) 持续 (A)
Nominal Voltage 标称电压 (V)		3.7	
Internal impedance 内阻(≤) (mΩ, AC 1KHz)		250	
Battery pack specification (电池组规格)		Battery protection Related Value: (相关的电池保护值)	
Ambient Conditions (环境温度)		Charge Temp. 充电温度(°C)	
Discharge Temp. 放电温度(°C)		0-45	
Humidity(湿度)		-20~60°	
		65±20%	

Title		Drawn: Wangyi		Revise No.:		E4-2009	
File NO.		Checked 1: Jessie		Projection:		1/1	
A10097		Checked 2:		Page:		1/1	
LP553436-PCM-LD		Approved:		Scale:		1 : 1	
A10097		Draw Date: 2014/08/19		Unit:		mm	

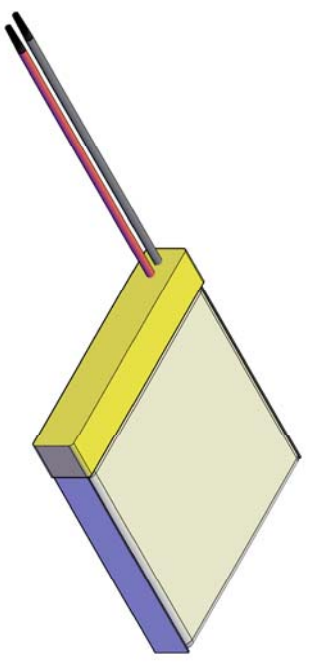

Remark(备注):
1. No scratch, discoloration, discoloration and leakage on the appearance of the cell(电池表面无划痕、变形、污点及漏液等现象).
2. Rohs compliant(严格按照ROHS要求生产).