
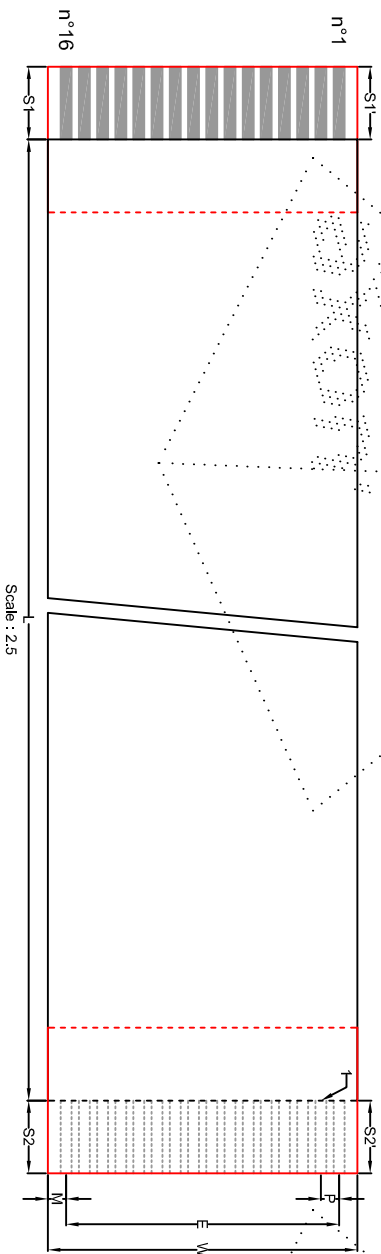


X Scale : 2,5
Y Scale : 15

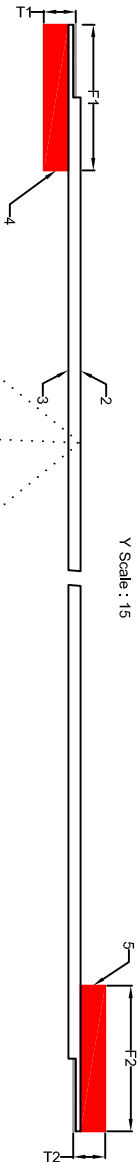

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	1500 Ohm/km max	-
Insulation resistance (conductor to conductor)	10 MOhm.m min	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C max	-
Voltage rating	60 V AC max	-
Flame resistance	VW - 1	UL 758

DIMENSIONS

ITEMS	SPECIFICATIONS
Number of conductors	16
Pitch	1 ± 0,10
Span	15 ± 0,15
Total width	17 ± 0,10
Margin	1 ± 0,20
Strip length	4 ± 1
End thickness	0.30 ± 0.05
Insulated length	0.30 ± 0.05
Reinforcement length	327 ± 5
Reinforcement length	F1 8 ± 2
Reinforcement length	F2 8 ± 2
Strips differences S-S'	0.4 max

COMPOSITION

ITEM	COMPONENTS	MATERIAL	DIMENSIONS (nominal in mm)
1	Conductor	Tin plated copper (2µm min)	0.6 x 0.025
2	Insulation	Polyester (White)	0.043
3	Insulation	Polyester (White)	0.043
4	Reinforcement tape	Polyester (Red)	0.226
5	Reinforcement tape	Polyester (Red)	0.226

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.




AXON KABEL GmbH
POSTFACH 1131 D - 71209 LEONBERG
HERTICHSTR. 23D - 71229 LEONBERG
EMAIL: sales@axon-cable.de
TEL: +49 7152-97992-0
www.axon-cable.com

Customer N°
800836/00

File N°
009863A.dwg

009863A



N. AXON'

FFC1.00D16/0327E4.0-4-0-08-0-08-0UARR