

RKMB105

105 KEY RUBBER BACKLIT KEYBOARDS

IP65 sealed frontal, VESA-Mount option



This 105 key keyboard features a compact rubber keyboard with integrated waterproof pointing device and seperate numpad. The backlit keys warrant for optimized performance while working in low-light environments. A non-backlit version is also available and a version with VESA-mounting. Options include NVIS compatible backlighting and custom dimming settings.

MAIN FEATURES

- Compact layout, 105 full travel keys
- Seperate numpad
- Dimmable backlighting at 8 levels by two dedicated keys
- Low power LED's warrant for a long life
- No external power supply necessary, keyboardport power sufficient
- White backlighting as standard, other colours on request.
- Super compact, thickness 15 mm
- Enclosure : Aluminium enclosure, black anodized
- Dimensions / weight: 331 x 110 x 14,95 cm / 0,6 kg.



Sealing : IP65 sealed frontal
Keys : 105 rubber keys
Pointing Device : mini thumbstick
Output : 1,6 m. USB cable
Power requirements : Directly from USB port
Operating temp. : -0°C to +70°C
Storage temp. range : -40°C to +85°C

Switch force : 300 grams +- 100 grams

Switch stroke : 1,5 mm

Lifetime switches : 1 million actuations



VESA-mount version

ORDER INFO

	Backlit version		Non-backlit version	
LAYOUT	ENCLOSED	VESA-MOUNT	ENCLOSED	VESA-MOUNT
US Qwerty	RKMB105S1USB-WLED	RKMB105V1USB-WLED	RKMB105S1USB	RKMB105V1USB
Cyrillic	RKMB105S7USB-WLED	RKMB105V7USB-WLED	RKMB105S7USB	RKMB105V7USB
French Azerty	RKMB105S33USB-WLED	RKMB105V33USB-WLED	RKMB105S33USB	RKMB105V33USB
German Qwertz	RKMB105S49USB-WLED	RKMB105V49USB-WLED	RKMB105S49USB	RKMB105V49USB

VER. 1.0


RKMB105

105 KEY RUBBER BACKLIT KEYBOARDS

IP65 sealed

DIMENSIONAL DRAWING STANDARD VERSION



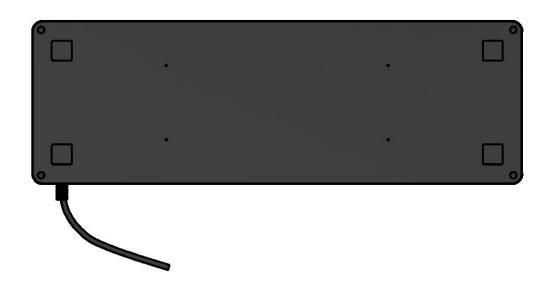




VER. 1.0

RKMB105

105 KEY RUBBER BACKLIT KEYBOARDS

IP65 sealed, VESA-Mount option

DIMENSIONAL DRAWING VESA-MOUNTING

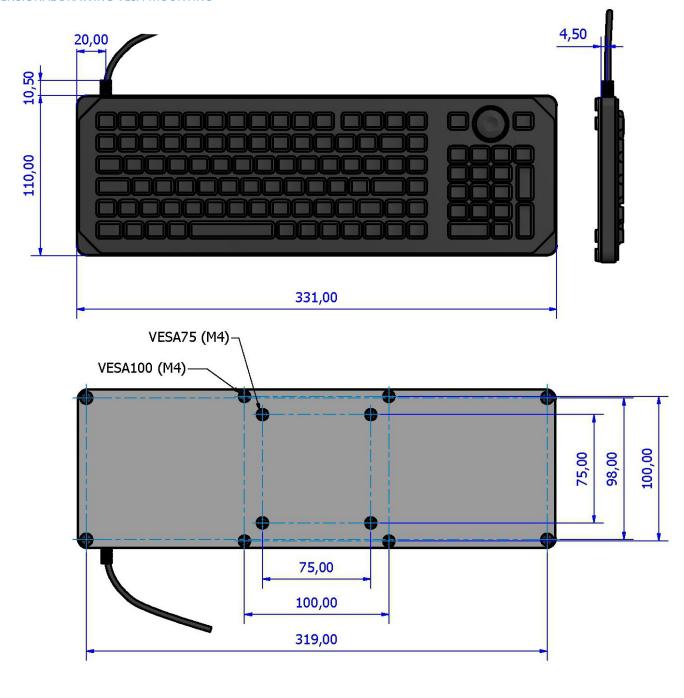



VER. 1.0

The company reserves the right to alter without prior knowledge the specification or design of any standard product or service.