


# K3841-Q $\mu$ ATX

## Industrial Series

---

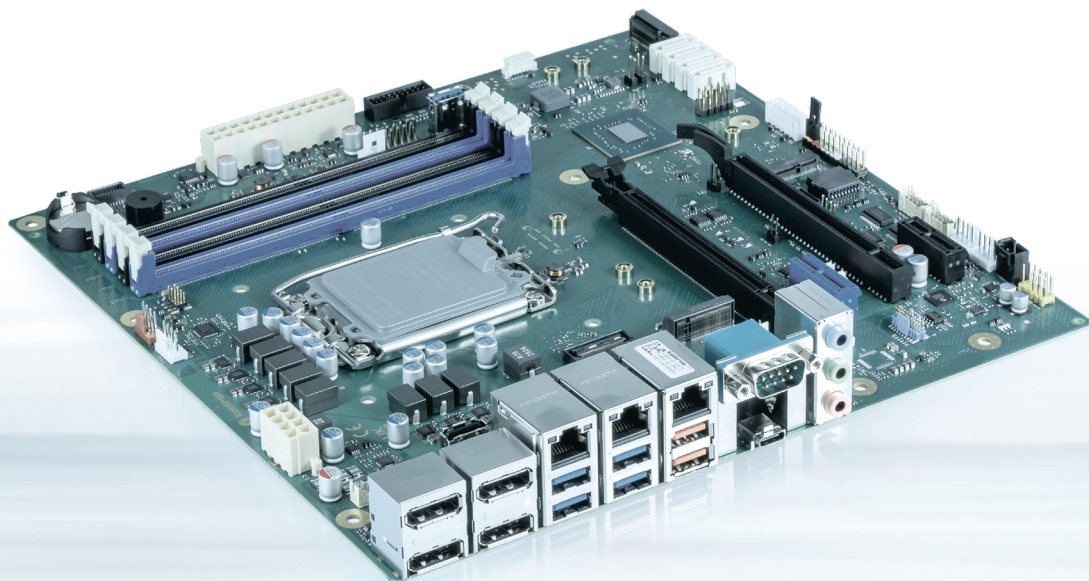

### Intel® Q670E Chipset and Intel® 12th Gen Core™ i3/i5/i7/i9 Processors

- ▶ Latest DDR5 memory technology for best-in-class system performance
- ▶ Intel® UHD Graphics 7xx driven by Xe Architecture
- ▶ Triple LAN 1GbE/2.5GbE incl. Teaming and TSN support
- ▶ Dual M.2 Key-M SSD & single M.2 Key-E WLAN sockets onboard
- ▶ Powerful USB 3.2 Gen 2/Type-C, 4x COM, GPIO

POSSIBILITIES START HERE



# K3841-Q μATX

## Industrial Series


The Industrial Motherboard K3841-Q μATX is equipped with the highly performant Intel® Q670E Chipset. It also offers a multitude of supporting processors such as the Intel® Core™ i9/i7/i5/i3 (12th Gen) and the Intel® Pentium®/Intel® Celeron® processor series. Designed and approved for 24/7 continuous operation and

an enhanced temperature range up to 60 °C the K3841-Q μATX provides high functionality and fits perfect with special requirements of certain markets. It offers iAMT-based Out-of-Band Management features. Besides, K3841-Q provides TSN and Realtime support (TCC) for specific industrial applications.

### ▶ PRODUCT HIGHLIGHTS

- ▶ Intel® 12th Gen Core™ Processor Series
- ▶ DDR5-4800 UDIMM, max. 128 GByte
- ▶ cTDP – Easy & flexible reduction of CPU TDP
- ▶ Supporting Intel® iAMT features and Intel® Time Coordinated Computing (TCC)
- ▶ PCI Express® x16 (Gen5 @ CPU, Gen4 @ PCH)
- ▶ 1x Intel® GbE LAN, 2x 2.5GbE incl. Teaming and TSN
- ▶ Intel® UHD Graphics 7xx driven by Xe Architecture; 4x DisplayPort V1.4a @4k
- ▶ Intel® High Definition 5.1 Audio; Intel® integrated TPM V2.0
- ▶ 8 Bit GPIO; 4 x COM ports
- ▶ 3x USB 3.2 Gen 2, 6x USB 3.2 Gen1, 2x USB 2.0, 1x USB 3.2 Gen2 stick socket, 1x USB 2.0 stick socket
- ▶ 4x SATA 6G incl. RAID support

- ▶ 2x M.2 2230/2242/2280 (Key-M, PCIe/NVME SSD modules), incl. NVME RAID support
- ▶ M.2 2230 (Key-E, WLAN/Bluetooth modules, incl. CNVi support)
- ▶ BIOS-POST/-Boot & OS – HW Watchdog onboard

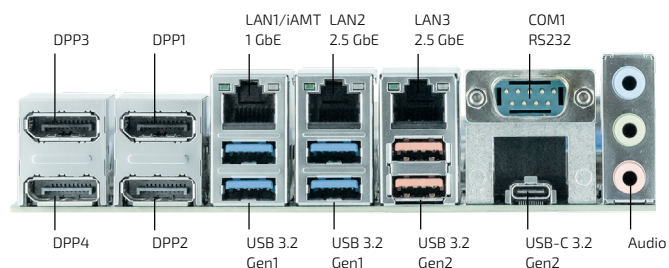

### ▶ TECHNICAL INFORMATION

<b>SYSTEM</b>	<b>PROCESSOR</b>	Intel® Core™ i9/i7/i5/i3 (12th Gen) processor series Intel® Pentium®/Intel® Celeron® processor series Socket LGA1700, max. 125 W TDP (For details on supported processors please refer to Kontron FTP Server)
	<b>CHIPSET</b>	Intel® Q670E Chipset
	<b>MEMORY</b>	4 DIMM Sockets DDR5-4800, max. 128 GByte, Dual Channel unbuffered, non-ECC Effective memory speed of DDR5-4800 modules according Intel® specification: 1x DIMM per channel = max. DDR5-4400 2x DIMM per channel (single rank) = max. DDR5-4000 2x DIMM per channel (dual rank) = max. DDR5-3600
<b>VIDEO</b>	<b>GRAPHICS</b>	Intel® UHD Graphics 7xx (depends on installed processor), 4x DPP V1.4a
<b>AUDIO</b>	<b>AUDIO CODEC</b>	Tempo Semiconductor 92HD91B
	<b>AUDIO INTERFACE</b>	5.1- channel*, High Definition Audio Codec
<b>NETWORK CONNECTION</b>	<b>ETHERNET 1</b>	Intel® i219LM with 10/100/1000 MBit/s, iAMT features, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support
	<b>ETHERNET 2/ETHERNET 3</b>	Intel® i225LM with 10/100/1000/2500 MBit/s, TSN Support, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support
<b>PERIPHERAL CONNECTION</b>	<b>USB</b>	2x USB 3.2 Gen 2 (rear I/O, Type-A), 1x USB 3.2 Gen 2 (rear I/O, Type-C with locking option), 4x USB 3.2 Gen1 (rear I/O, Type-A), 2x USB 3.2 Gen1 (by header), 2x USB 2.0 (by header), 1x USB 3.2 Gen2 (internal Type-A stick socket), 1x USB 2.0 (internal Type-A stick socket)
	<b>SERIAL PORT</b>	1x RS232 (rear I/O), 3x RS232 (by header)
	<b>OTHER I/Os</b>	1x 8-Bit GPIO
<b>STORAGE &amp; EXPANSION</b>	<b>SATA</b>	4x Serial ATA III 600 Interface (up to 6Gbit/s), NCQ, AHCI, RAID 0/1/5/10
	<b>M.2 PCIe/NVME</b>	2x M.2 2230/2242/2280 (Key-M, PCIe/NVME SSD modules), incl. NVME RAID support
	<b>M.2 WIRELESS</b>	1x M.2 2230 ((Key-E, WLAN/Bluetooth modules, incl. CNVi support)
	<b>PCIe/PCI SLOTS</b>	PCIe x16: 1x 16 lanes, Gen5/1x 4 lanes, Gen4
	<b>GPIO</b>	PCIe x1: 1x Gen3, "open slot"/1x Gen4, "closed slot"
	<b>CONNECTOR INPUT VOLTAGE</b>	8 Bit GPIO (Input/Output); WLAN LED support**, WLAN enable/disable support 3.3 V/5 V/12 V supply voltage output; SMBus controller PCA9554A
<b>POWER</b>		ATX (Multirail) plus 8-pin socket (12 V for CPU)

\*) 5.1 support via SPDIF output  
\*\*) Requires HW Rev. ≥ 02xx

## TECHNICAL INFORMATION

<b>FIRMWARE</b>	<b>BIOS</b>	AMI Aptio 5.x (UEFI) BIOS modified and adapted by Kontron; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCIe Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5. HW Watchdog support*
<b>SYSTEM CONTROL</b>	<b>WATCHDOG</b> <b>REAL TIME CLOCK</b> <b>TPM</b> <b>FP HEADER</b>	No legacy OS support, no MBR installation (UEFI only) Recovery BIOS, System and BIOS Password, Boot Sequence Control Integrated TPM V2.0 (Intel® integrated); socket for optional TPM module 1x Header for Reset button, HDD LED & External Speaker, Power button, Power LED
<b>SOFTWARE</b>	<b>SECURITY</b>	Recovery BIOS, System and BIOS Password, Boot Sequence Control, Serial/USB- Port Access Protection, Write Protection for Flash BIOS, EraseDisk (BIOS Feature), Trusted Platform Module (TPM)
<b>MECHANICAL</b> <b>ENVIRONMENTAL</b> <b>CERTIFICATION</b>	<b>OS SUPPORT</b>	MS Windows 10, MS Windows 11, MS Windows 10 IOTG, MS Windows Server Linux-64 No legacy OS support, no MBR installation (UEFI only)
	<b>DIMENSIONS (L x W)</b>	μATX: 9.6" x 9.6" (243.8 x 243.8 mm)
	<b>OPERATION TEMPERATURE</b>	0 °C - 60 °C
	<b>EMC &amp; SAFETY</b>	CTÜVus acc. IEC62368-1, CE Class B incl. Industrial Immunity, UKCA, FCC-B verified


\*) Requires HW Rev. ≥ 02xx

## POWER SUPPLY REQUIREMENTS

SOURCE	VOLTAGE	MIN. PS LOAD	MAX. VOLTAGE TOLERANCE	MOTHERBOARD CAPACITIVE LOAD	MOTHERBOARD MAX. CURRENT (continuous)*
Main Power Supply	+ 12 V	0 A	± 5 %	2.500 μF	26 A
	- 12 V	0 A	± 10 %	-	0.3 A
	+ 5 V	0 A	± 5 %	1.900 μF	6.0 A
	+ 3.3 V	0 A	± 5 %	1.100 μF	0.5 A
Aux	+ 5 Vaux	0 A	± 5 %	1.900 μF	2.5 A

\*) Max. motherboard input current incl. processor and DRAM memory. Additional power for drives, USB devices, PCIe cards etc. is not included! Note: BIOS provides option to reduce CPU TDP/Turbo power in order to use PSU with limited loadability.  
Processor 125 W TDP: Max. Cont. Current = 26 A; max. Surge Current = 39 A (< 10ms)  
Processor 65 W TDP: Max. Cont. Current = 23 A; max. Surge Current = 34 A (< 10ms)  
Processor 35 W TDP: Max. Cont. Current = 11 A; max. Surge Current = 19 A (< 10ms)

## CONNECTOR / SOCKET DIAGRAM

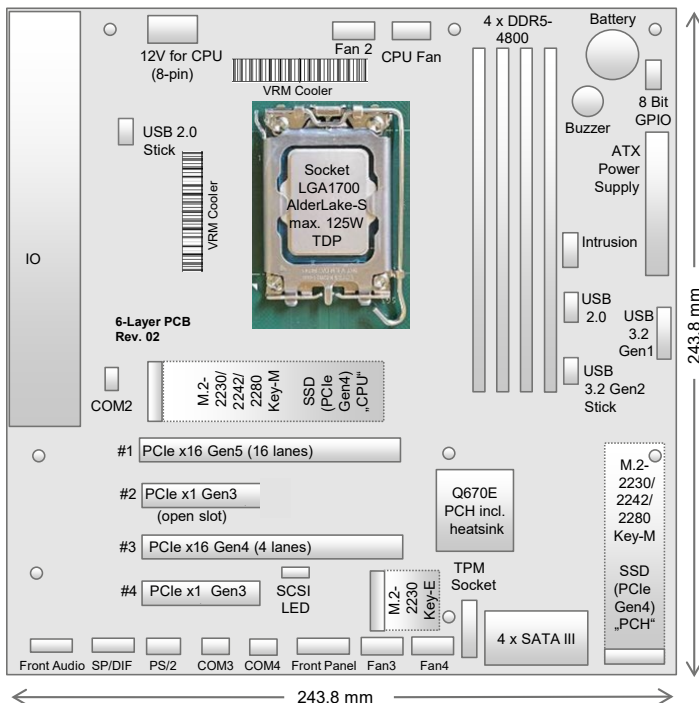

## ▶ TECHNICAL INFORMATION

<b>FEATURES</b>	Board Size / Chipset VGA* / DVI / DPP / LVDS / eDP Stereo Audio / 5.1 Multichannel Audio / Front Panel Audio Buzzer / int. Speaker Support (mono) GbE LAN / 2.5GbE LAN / Dual 2.5GbE LAN WoL / LAN Boot / Teaming / TSN Intel® Standard Manageability / iAMT / vPro SATA / SATA RAID / M.2 SSD (NVME) / NVME RAID USB 2.0 / USB 3.2 Gen1 / USB 3.2 Gen2 / USB 3.2 Type-C FAN controlled & monitored / CPU / AUX1 / AUX2 / AUX3 TEMP monitored CPU / Onboard Sensors / External Sensor	µATX / Q670E - / - / + / - / - - / + / + + / + + / + / + + / + / + / + + / + / - + / + / + / + + / + / + / + + / + / + / + + / + / -
<b>SPECIAL FEATURES</b>	Silent Fan / System Guard / cTDP Recovery BIOS / Flash Update / Multi Boot HDD Password / EraseDisk / TPM V2.0 BIOS POST Watchdog / BIOS Boot Watchdog / OS HW Watchdog**** Logo Boot Option High Efficiency Core Voltage Regulator Design Operating Mode 24-7 / 8-5 (hrs per day - days per week) Motherboard operating temperature range (chassis inside)***	+ / + / + + / + / + + / + / + + / + / + + + + / - 0 °C – 60 °C
<b>INTERNAL CONNECTORS</b>	DIMM Sockets (DDR5-4800) / ECC-Support PCI Express® x16: 16lanes-Gen5 / PCI Express® x16: 4lanes-Gen4 PCI Express® x1: Gen3-"open" / PCI Express® x1: Gen4-"closed" PCI Slots (32 Bit, 33 MHz, Rev. 2.3) / Mini-PCIe SATA-600 / M.2 Key-M (NVME SSD) / M.2 Key-B M.2 2230 (Key-E, PCIe & USB2.0 for WLAN/Bluetooth) S/PDIF (digital Audio) OUT / IN Front Panel Audio (9-Pin, HD Audio) USB 2.0 / USB 3.2 (Gen1) / USB 2.0 Stick / USB 3.2 (Gen2) Stick**** Fan CPU / AUX1 / AUX2 / AUX3 Intrusion (Case Open) / GPIO (8Bit) / SM-Bus (Case Temp.) Serial Port Header (COM, RS-232) / Parallel Port Header / PS2 Header ** Front Panel (Power Switch, Reset Switch, LEDs, Intel 10 pin compatible) Multirail PSU (24 pin + 8 pin) / Single 12 V PSU	4 / - 1 / 1 1 / 1 - / - 4 / 2 / - 1 1 / - 1 1 / 1 / 1 / 1 1 / 1 / 1 / 1 1 / 1 / - 3 / - / 1 1 + / -
<b>EXTERNAL CONNECTORS</b>	VGA Sub D* / DVI-I / DVI-D / DisplayPort V1.4a Audio Mic. In / Line in / Line out (or driver configuration) LAN (RJ-45) PS/2 Mouse / Keyboard** USB 2.0 / USB 3.2 (Gen1) / USB 3.2 (Gen2) Serial (COM1, RS-232) Parallel (EPP/ECP)	- / - / - / 4 1 / 1 / 1 3 - / - - / 4 / 3 1 -

\*) VGA possible via DP-VGA-converter (dongle)

\*\*) Internal PS/2 header available

\*\*\*) Forced cooling required, see technical documentation for details

\*\*\*\*) Each internal USB connector (pin header) provides two USB ports (except for USB stick socket)

\*\*\*\*\*) Requires HW Rev. ≥ 02xx

## ▶ ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION
K3841-Q µATX	F5110-V193	Intel® 12th Gen Core™ Processor Series, Intel® Q670E Chipset
<b>ACCESSORIES</b>		
SERIAL PORT CABLE	F5000-K010	400 mm, fullsize slot bracket
M.2 CARRIER BOARD	F5000-M001	D3352-A1

## ▶ GLOBAL HEADQUARTERS

### Kontron Europe GmbH

Gutenbergstraße 2  
85737 Ismaning, Germany  
Tel.: +49 821 4086-0  
Fax: +49 821 4086-111  
info@kontron.com

[www.kontron.com](http://www.kontron.com)