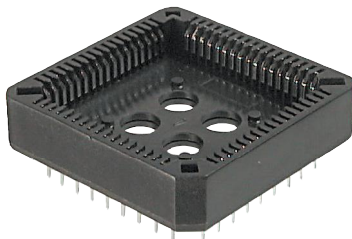


Chip-Carrier-Sockel Chip-carrier-sockets


Isolierkörper

PBT, UL 94V-0

Kontakte

Phosphorbronze, verzinkt

Betriebsstrom

1A

Isolationswiderstand

 10000M Ω min.

Durchschlagsspannung

1000V AC

Kontaktwiderstand

 15m Ω max.

Betriebstemperatur

-40°C bis +105°C

Insulator

PBT, UL 94V-0

Contacts

Phosphor bronze, tin plated

Current rating

1A

Insulating resistance

 10000M Ω min

Withstanding voltage

1000V AC

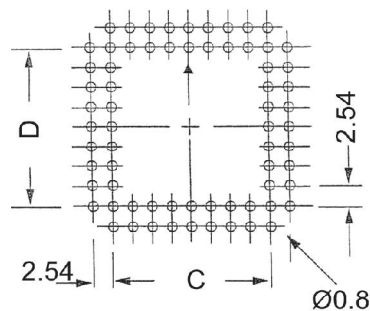
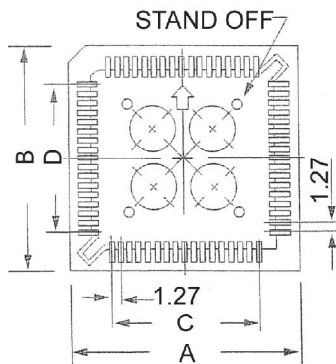
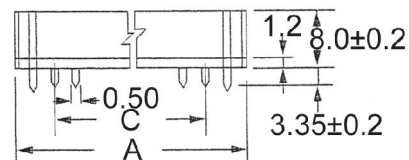
Contact resistance

 15m Ω max

Operating temperature

-40°C bis +105°C

No. of Contacts	Qty per tube	Dimension			
		A	B	C	D
20	39	15,50	15,50	5,08	5,08
28	33	18,05	18,05	7,62	7,62
32	29	18,05	20,60	7,62	10,16
44	25	23,50	23,50	12,70	12,70
52	23	25,88	25,88	15,24	15,24
68	19	31,66	31,66	20,32	20,32
84	16	36,66	36,66	25,40	25,40


 Bestellcode: **A** - **CCS** - **x** - **x** - **T**
 Ordercode :

 Bitte „x“ durch die unten geeignete Option ersetzen
 Please replace „x“ with appropriate option listed below

1. 2.

1.

Polzahl

20, 28, 32, 44, 52, 68, 84

No. of contacts

20, 28, 32, 44, 52, 68, 84

2.

Oberfläche

 Z -Zinn*
 G -Gold

Finish

 Z -tin*
 G -gold

Ausziehwerkzeug

A-EX-T

Extraction tool

A-EX-T



* Standard