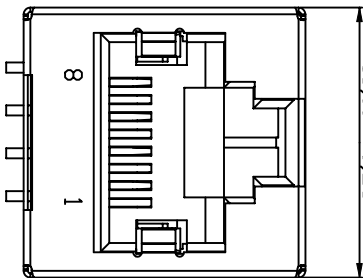
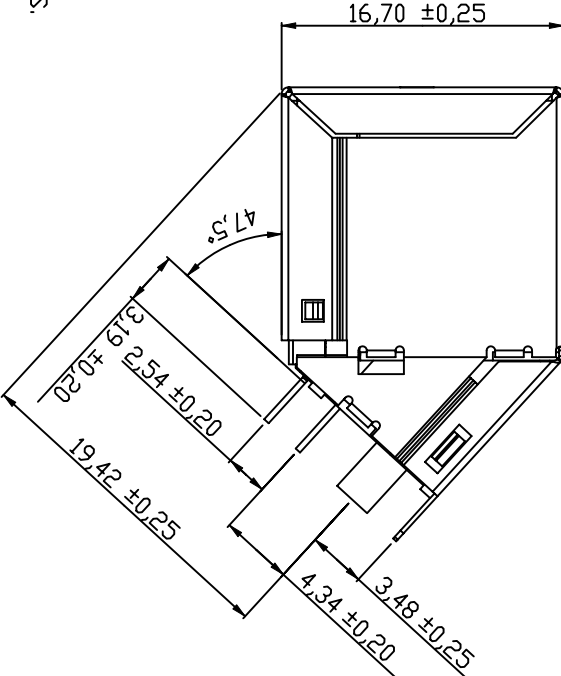
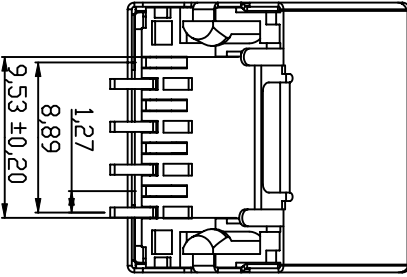
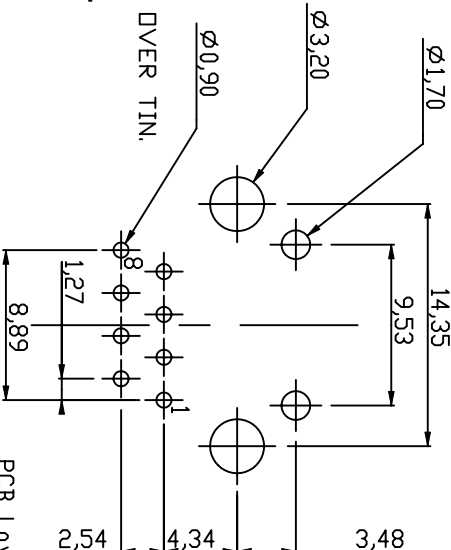
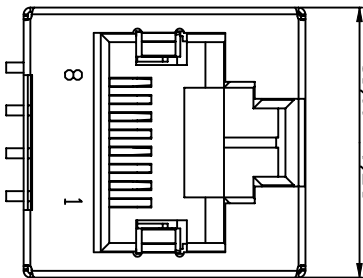
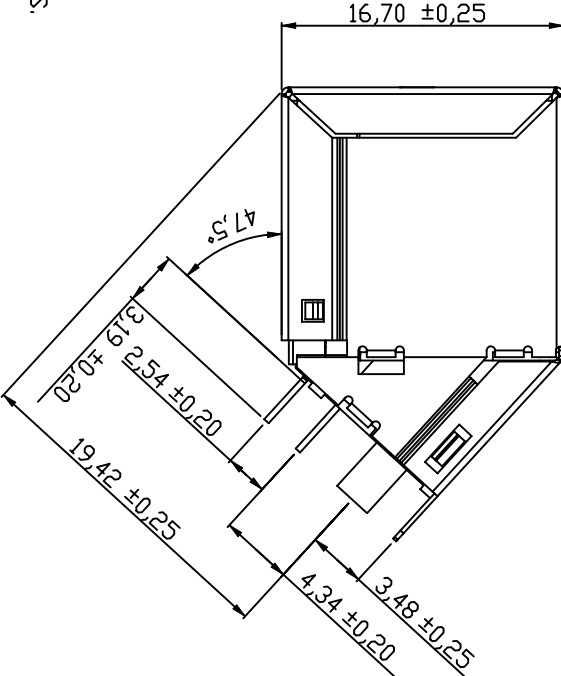
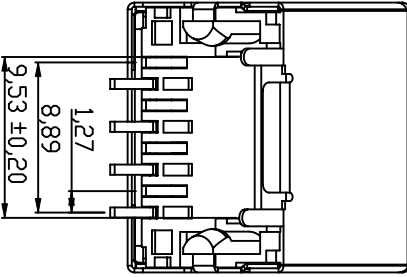
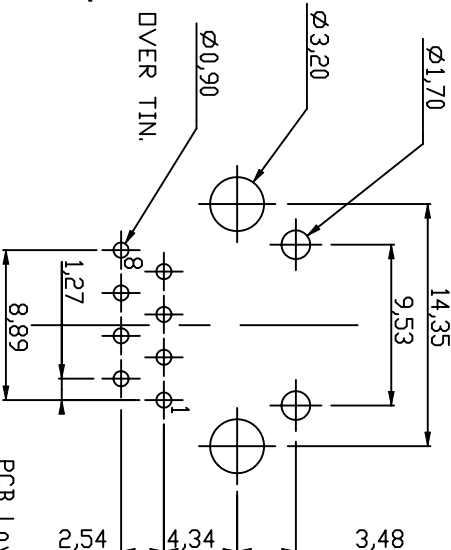


	1	2	3	4	5	6	7																												
A								A																											
B	 							B																											
C								C																											
D	NOTES: <u>ELECTRICAL:</u> 1. VOLTAGE RATING : 125 VAC RMS. 2. CURRENT RATING : 1.5 AMP. 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX. 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC. 5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN. <u>MECHANICAL:</u> 1. SHIELD MATERIAL : BRASS C2680 t=0.25mm. 2. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0. 3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm. 4. PLATING : SHIELD PLATED 30u"~50u" NICKEL OR GROUNDING PEG OVER TIN. TAILS-150u" TIN-LEAD MIN OVER 50u" NICKEL. A5. OPERATING LIFE : 2500 CYCLES MIN. 6. PCB RETENTION PRE-SOLDER: 1 LB MIN. 7. PCB RETENTION POST-SOLDER: 10 LBS MIN. <u>ENVIRONMENTAL:</u> 1. STORAGE : -40°C TO +85°C. 2. OPERATION: 0°C TO 70°C.							D																											
E								E																											
F								F																											
G	<table><tr><th colspan="2">Änderung</th><th>Datum</th><th>Name</th><th>Datum</th><th>Name</th><th>Benennung</th></tr><tr><td></td><td></td><td></td><td>Bearb.</td><td>14.01.03</td><td>A. Menk</td><td rowspan="3">AMJ-188-30101-CAT6 Zeichnungsnummer ASS 1572 CO Blatt</td></tr><tr><td></td><td></td><td></td><td>Gepr.</td><td>14.01.03</td><td></td><td rowspan="2">Ersatz für ASS 1572 CO Blatt</td></tr><tr><td></td><td></td><td></td><td>Norm.</td><td></td><td></td></tr></table>							Änderung		Datum	Name	Datum	Name	Benennung				Bearb.	14.01.03	A. Menk	AMJ-188-30101-CAT6 Zeichnungsnummer ASS 1572 CO Blatt				Gepr.	14.01.03		Ersatz für ASS 1572 CO Blatt				Norm.			G
Änderung		Datum	Name	Datum	Name	Benennung																													
			Bearb.	14.01.03	A. Menk	AMJ-188-30101-CAT6 Zeichnungsnummer ASS 1572 CO Blatt																													
			Gepr.	14.01.03			Ersatz für ASS 1572 CO Blatt																												
			Norm.																																
H								H																											
1	2	3	4	5	6	7																													

	1	2	3	4	5	6	7																																	
A								A																																
B	 							B																																
C								C																																
D	NOTES: <u>ELECTRICAL:</u> 1. VOLTAGE RATING : 125 VAC RMS. 2. CURRENT RATING : 1.5 AMP. 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX. 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC. 5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN. <u>MECHANICAL:</u> 1. SHIELD MATERIAL : BRASS C2680 t=0.25mm. 2. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0. 3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm. 4. PLATING : SHIELD PLATED 30u"~50u" NICKEL OR GROUNDING PEG OVER TIN. TAILS-150u" TIN-LEAD MIN OVER 50u" NICKEL. A5. OPERATING LIFE : 2500 CYCLES MIN. 6. PCB RETENTION PRE-SOLDER: 1 LB MIN. 7. PCB RETENTION POST-SOLDER: 10 LBS MIN. <u>ENVIRONMENTAL:</u> 1. STORAGE : -40°C TO +85°C. 2. OPERATION: 0°C TO 70°C.							D																																
E								E																																
F								F																																
G	<table><tr><th colspan="2">Änderung</th><th>Datum</th><th>Name</th><th>Datum</th><th>Name</th><th>Benennung</th></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td rowspan="4">AMJ-188-30101-CAT6 Zeichnungsnummer ASS 1572 CO Blatt</td></tr><tr><td></td><td></td><td></td><td>Bearb.</td><td>14.01.03</td><td>A. Menk</td></tr><tr><td></td><td></td><td></td><td>Gepr.</td><td>14.01.03</td><td></td></tr><tr><td></td><td></td><td></td><td>Norm.</td><td></td><td></td></tr></table>							Änderung		Datum	Name	Datum	Name	Benennung							AMJ-188-30101-CAT6 Zeichnungsnummer ASS 1572 CO Blatt				Bearb.	14.01.03	A. Menk				Gepr.	14.01.03					Norm.			G
Änderung		Datum	Name	Datum	Name	Benennung																																		
						AMJ-188-30101-CAT6 Zeichnungsnummer ASS 1572 CO Blatt																																		
			Bearb.	14.01.03	A. Menk																																			
			Gepr.	14.01.03																																				
			Norm.																																					
H	ASSMANN Electronic Components ASS 1572 CO Ersatz für Blatt							H																																
1	2	3	4	5	6	7																																		