
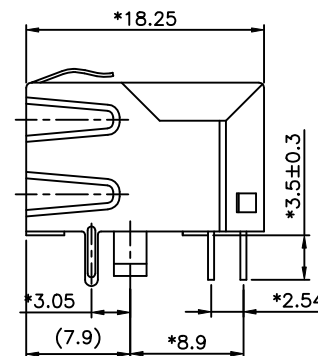




REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

**NOTES:****ELECTRICAL:**

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 45 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO 70°C.
- WAVE SOLDER TEMPERATURE: 255°C TO 265°C 5-10 SECOND.

MATES WITH MODULAR PLUG CONFORMING TO


FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E5608-4R03RX-L

1- 3u" 2- 6u"
 3-15u" 4-30u"
 5-50u" 6-Pd 20u"

PC Board Layout Component Side Shown

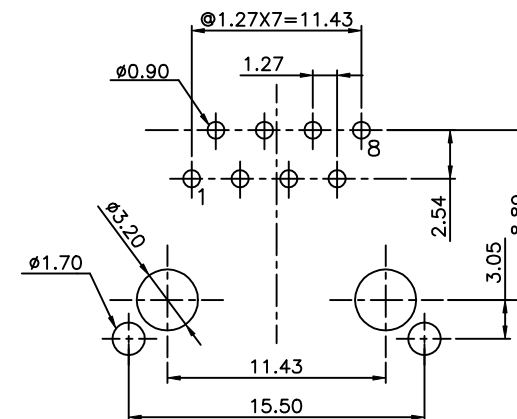

DETACHED LISTS	MM (INCH)	DFTO SAMMY	DATE 05/11/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD ANKUE	DATE 2006/5/11		
	MFO	DATE			
	APPVLLUSHENG	DATE 2006/5/11			
MM	±	MATERIAL :	QT'Y :	TITLE	
.0 ±0.20	±			11.5 SIDE ENTRY PCB JACK 8P(W/ TABS)	
.00 ±0.15	±	FINISH :		DRAWING NO. GE563067-LA	
.000 ±0.075	±	SCALE :		/PART NO. SEE NOTE	
ANGLES ±				DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION				SHEET X OF Y	

H

G

F

E

D

C

B

A