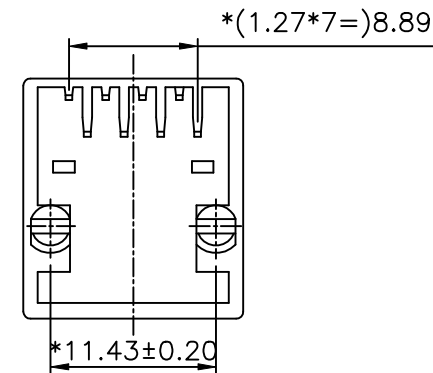
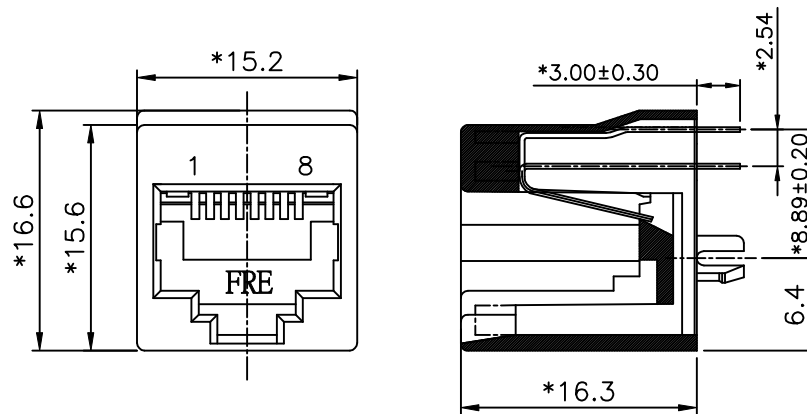


REV	ECO	DESCRIPTION	DRFT	CHKD
1		ADD PART NUMBER	8/09/02	
2		MODIFY PART NUMBER	1/04/03	
3		ADD PART NUMBER	09/04/03	

**NOTES:****ELECTRICAL:**

1. VOLTAGE RATING: 125 VAC RMS .
2. CURRENT RATING: 1.5 AMP .
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZ T=0.35mm.
3. PLATING: GOLD PLATING OVER NICKEL.
4. OPERATING LIFE: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


1. STORAGE: -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.

PART NUMBER: E5288-YXOXQX

N--W/ FRE LOGO
P--W/O LOGO

1--3U"
2--6U"
3--15U"
4--30U"
5--50U"
1--A06-0080(black)
F--A06-1430(white)
G--A06-1440(ivory)
H--A06-1420(yellow)
S--A06-1610(chinese red)

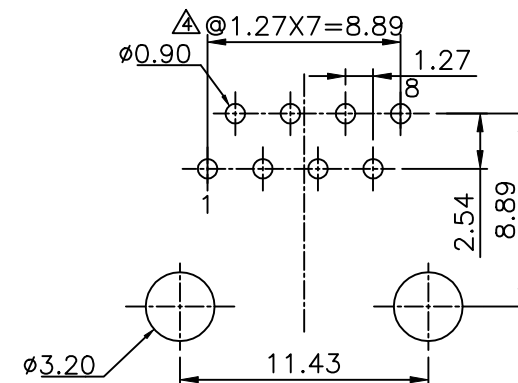

PC Board Layout
Component Side Shown

DETACHED LISTS	MM (INCH)		DFTD CZH	DATE 12/18/2001	FULL RISE ELECTRONIC CO., LTD		
	TOLERANCES EXCEPT AS NOTED		CHKD/AMMY	DATE 2005/09/01	TITLE		
MM			MFO	DATE	TOP ENTRY PCB JACK		
.0 ±0.20	±		APPVLLUSHENG	DATE 2005/09/01	DRAWING NO. GE523048		
.00 ±0.15	±				/PART NO. SEE NOTE		
.000 ±0.075	±				SIZE A3		
ANGLES ±					REV 5		
THIRD ANGLE PROJECTION					DO NOT SCALE DRAWING		
					SHEET X OF Y		