
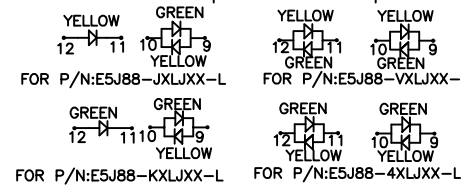

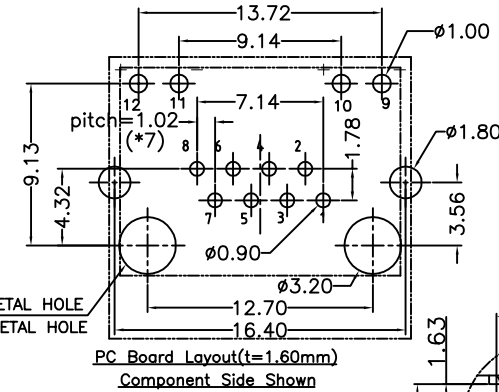
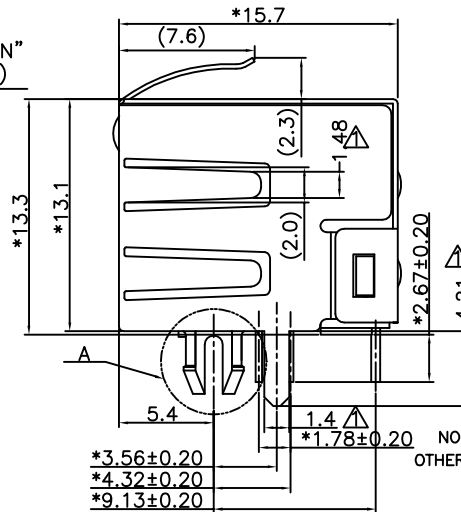


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD DIM	MANLY	08/24/06
△		MODIFY DRAWING	YUKI	10/09/06

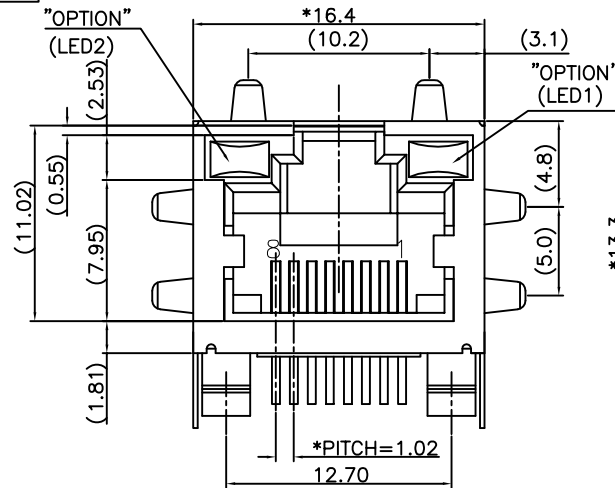

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.
- LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
REVERSE VOLTAGE: 5 VOLTS MINIMUM.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G.F UL94-0. COLOR-BLACK. △
- INSERT MATERIAL : NYLON+30%G.F UL94-0. COLOR-BLACK. △
- BACK PLATE MATERIAL : NYLON+30%G.F UL94-0. COLOR-BLACK. △
- LED SIZE : 3.2*2.0*7.0*P=2.54mm.
- SHIELD MATERIAL : GOLD PLATING OVER NICKEL.
- CONTACT MATERIAL : COPPER ALLOY 0.25mm THICKNESS PLATING NI.
- PLATING : PHOSPHOR BRONZE 0.35mm THICKNESS OR Ø0.46.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10 SECONDS)
- RoHS COMPLIANT. △

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE No:E163191

RoHS PART NUMBER: E 5J 8 8 - X X L X X L


- LED1:GREEN, LED2:YELLOW
- LED1:GREEN, LED2:GREEN
- LED1:YELLOW, LED2:GREEN
- LED1:G+Y, LED2:G+Y
- LED1:RED, LED2:GREEN
- LED1:YELLOW, LED2:YELLOW
- LED1:G+Y, LED2:YELLOW
- LED1:GREEN, LED2:RED
- LED1:G+Y, LED2:GREEN
- LED1:Y+G, LED2:Y+G

- PLATING:1-3u" 2-6u" 5-50u"
- 3-15u" 4-30u"

- 1-Plate Tin shield stamp pin,led long 7.0mm
- 2-Plate Ni shield stamp pin,led long 7.0mm
- 3-Plate Tin shield round pin,led long 7.0mm
- 4-Plate Ni shield round pin,led long 7.0mm

J-W/O LOGO FR52

- NO TAB
- TOP TABS
- SIDE TABS
- TOP TABS & SIDE TABS

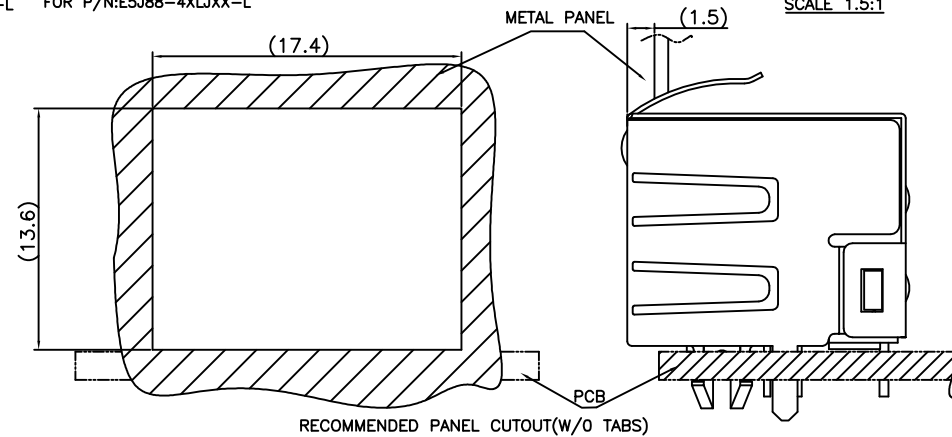

MM (INCH)		OFTO peters		DATE 03/19/05	
TOLERANCES EXCEPT AS NOTED		CHKD ASHELL		DATE 2006/10/9	
MM		MFO		DATE	
.0 ± 0.2		APPV ARTHUR		DATE 2006/10/9	
.00 ± 0.15		MATERIAL :		QT'Y :	
.000 ± 0.075		FINISH :		SCALE :	
ANGLES ± 0.5		THIRD ANGLE PROJECTION			



RoHS Compliant

FULL RISE ELECTRONIC CO., LTD

TITLE

RJ45 SIDE ENTRY LED JACK

DRAWING NO. GE5J3015-LA

/PART NO. SEE NOTE

SIZE

A3

REV 2

DO NOT SCALE DRAWING

SHEET 1 OF 1