



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|---|------|------|-----|
| 05/03/03 | A | ALL DIM. CHANGED TO 3 DECIMAL POINT CONTACTS MTL. CHANGED TO PHOSPHOR BRONZE | T.B. | B.S. | |
| 1/07/06 | B | ADDED "ROHS COMPLIANT" | T.B. | B.S. | |
| 2/25/06 | C | LEAD FREE WAS Sn-Pb PLTD. | T.B. | B.S. | |
| | | | | | |

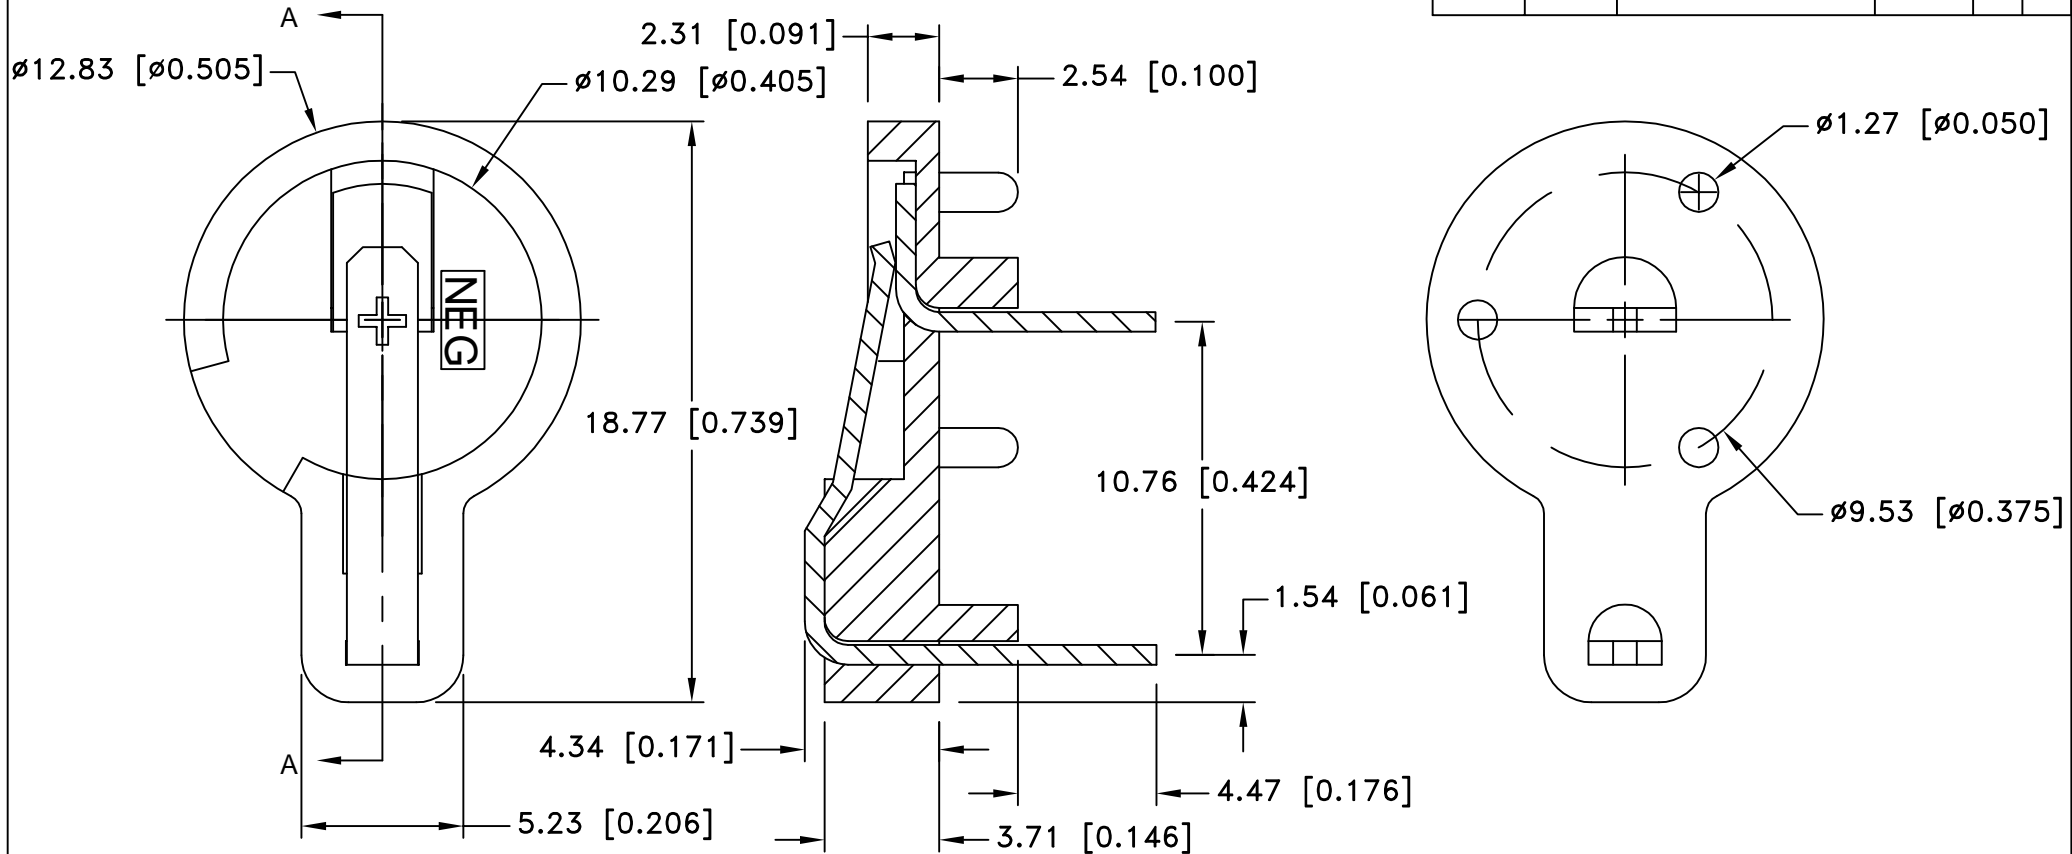

NOTES:

MATERIAL:

HOLDER: PBT POLYESTER, BLACK, UL94V-0
 POS. CONT.: PHOSPHOR BRONZE, SPRING TEMPER, NICKEL
 PLTD., LEAD FREE SOLDER TAILS
 NEG. CONT.: PHOSPHOR BRONZE, SPRING TEMPER, NICKEL
 PLTD., LEAD FREE SOLDER TAILS
 ROHS COMPLIANT

| | | | |
|--------------------------------|---|----------------|------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal $\pm .5$ (.020) | Scale | | Drawn By B.S. |
| Fractional $\pm .8$ (.030) | Title | | Approved By T.B. |
| Angular $\pm 3^\circ$ | Date | | COIN CELL HOLDER |
| | 2/25/06 | Drawing Number | BH401 |