


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
AA	CREATION	JZ	***	11/04/2008

CHARACTERISTICS

ITEMS	VALUE	TEST METHOD
Resistance of conductor	520 Ohm/km maxi	—
Conductor to conductor insulation resistance	10 MOhm.m mini	500 V DC
Dielectric test (conductor to conductor)	1 minute	400 V AC
Temperature rating	105 °C	—
Voltage rating	60 V AC maxi	—
Flame resistance	VW — 1	UL 758

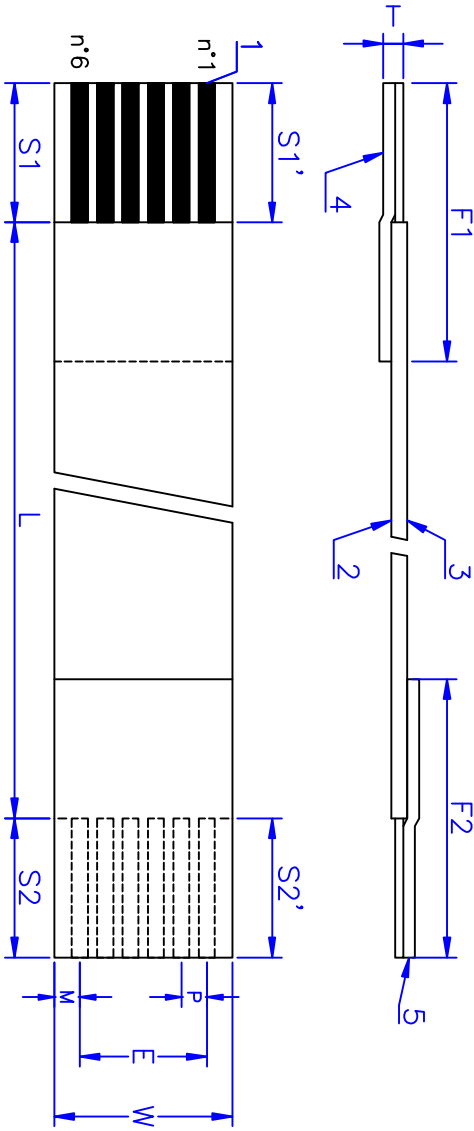

COMPOSITION

COMPONENTS	UNITS	SPECIFICATIONS	Item
Conductor	—	Tin plated copper (2 µm typ)	1
Insulation	MM	0,70x0,05 mm nominal	2 3
Reinforcement	MM	0,086 mm nominal	4 5
Reinforcement tape	MM	Blue polyester 0,23 mm nominal	

DIMENSIONS


ITEMS	UNITS	SPECIFICATIONS
Number of conductors	—	6
Pitch	MM	1,00 ± 0,08
Span	MM	5,00 ± 0,15
Total width	MM	7,00 ± 0,10
Margin	MM	1,00 ± 0,20
Strip length	MM	2,5 ± 0,5
Strip length	MM	2,5 ± 0,5
End thickness	MM	0,30 ± 0,05
Insulated length	MM	65 ± 3
Reinforcement length	MM	5 ± 1,5
Reinforcement length	MM	5 ± 1,5
Strip difference S-S'	MM	0,40 max

UNLESS OTHERWISE SPECIFIED
DIMENSIONS : MM ANGLES : ° d.


axon'
 CÂBLE & INTERCONNECTIQUE

AXON'CABLE SAS
 81210 MONTMIRAIL - FRANCE
 TEL : +33 3 28 61 70 00
 FAX : +33 3 28 61 28 63
 www.axon-cable.com

FFC CND 4.0/Annex 2001/PL-LM	CUSTOMER N°	TITLE :
Ineltro	FILE N°	FFC1,00DD06/006SS2,5-2,5-05,0-05,0FABB spe tol
SJ08204A.dwg	SIZE	AXON'SA N°



SCALE : N.D.	REV	A	A
	Prod.		
	Doc.		
	SHEET	1	of 1